



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS 19644

•

. .5.5

.

and the same of th





Colorado River Basin Review of Flood **Hoover Dam**


Control Regulation

FINAL REPORT July 1982

U.S. Army Corps of Engineers, Los Angeles District **Bureau of Reclamation, Lower Colorado Region**





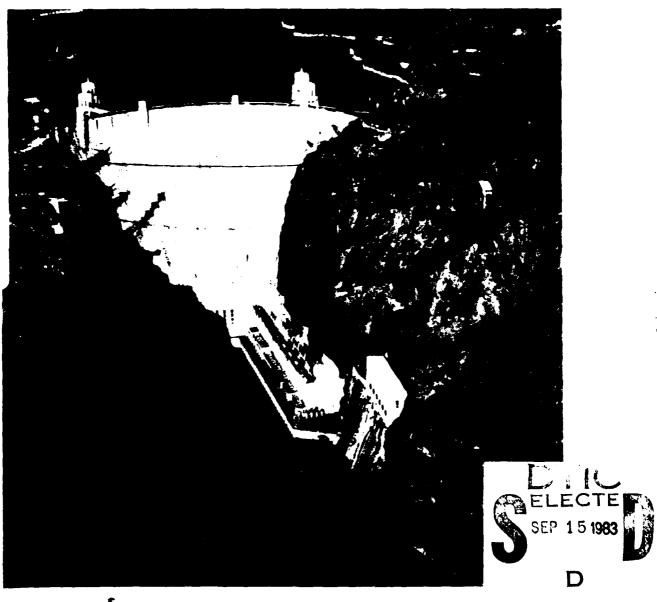






83

09

002

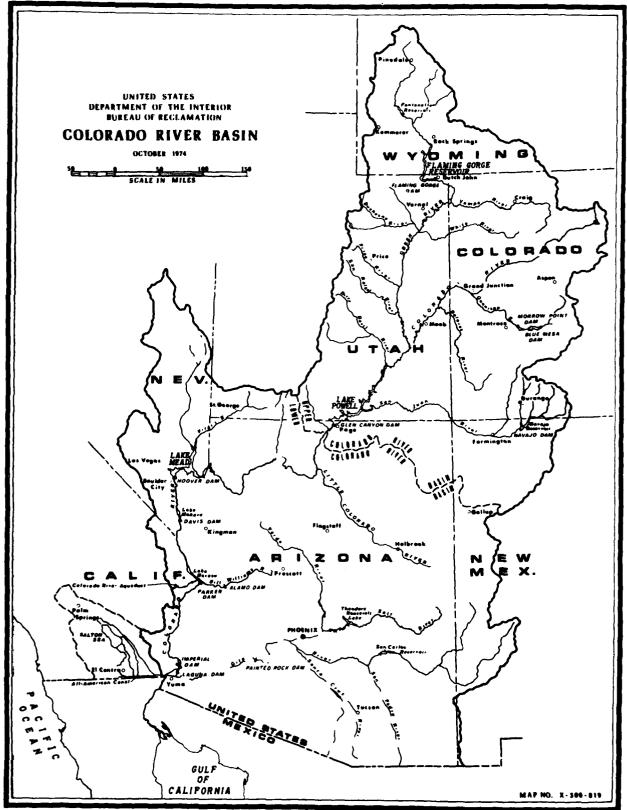

HD-1

FRONTISPIECE

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 2. GOVT ACCESSION NO A 182.407	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
Colorado River Basin Hoover Dam -	Final Report
Review of Flood Control Regulation	July 1982 6. PERFORMING ORG. REPORT NUMBER
	NA
US Army Corps of Engineers, Los Angeles District Bureau of Reclamation, Lower Colorado Region	8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Corps of Engineers Los Angeles District	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
PO Box 2711, Los Angeles, CA 90053	NA
II. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE July 1982
US Army Corps of Engineers Los Angeles District	13. NUMBER OF PAGES
PO Box 2711, Los Angeles, CA 90053 14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	NA
14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	154. DECLASSIFICATION DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)	<u></u>
Approved for public release; distribution unlimited 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from	
18. SUPPLEMENTARY NOTES	
NA	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Colorado River	
Hoover Dam	
Dams	
Reservoirs Flood Control Regulation	N.
20. ABSTRACT (Continue on reverse eich if necessary and identify by block number)	The purpose of this study is
to determine and select the best water control plan	for flood control operation
of Hoover Dam. The study's scope includes the lowe	er Colorado River flood plain
below Hoover Dam including locations in the US and i	in Mexico, as well as such
diverse interests as power markets in Arizona, Nevad Southern Utah, and Western New Mexico; irrigation di ornia; municipal water supplies for Las Vegas, Nevad Diego, and other cities in SouthernCalifornia; and r	istricts in Arizona and Calif- ia, also for Los Angeles. San
bordering states.	coreacton facilities in all

COLORADO RIVER BASIN--HOOVER DAM

REVIEW OF FLOOD CONTROL REGULATION FINAL REPORT

JULY 1982

Accession For

NTIS GRA&I
DTIC TAB
Unannounced
Justification

By
Distribution/
Availability Codes

Avail and/or
Dist
Special

U.S. Army Corps of Engineers Los Angeles District

> Bureau of Reclamation Lower Colorado Region



*Original completes color of places: Discount to recoordetations like to the black and white?

CONTENTS

Frontispiece

INTRODUCTION Purpose and Authority Scope of Study Study Participants and Coordination Prior Studies and Reports The Report.	. 1
RESOURCES AND ECONOMY OF THE STUDY AREA	7
PROBLEMS, NEEDS, AND OPPORTUNITIES	10 13 13 13 13 13 13 13 13 13 13 13 13 13
FORMULATION OF ALTERNATIVE PLANS	7 8 9
ASSESSMENT AND EVALUATION OF ALTERNATIVES. Predicted Impacts	77888111223
Public Meeting Viewpoints4	4

CONTENTS - (Continued)

COMPARISON OF PLANS
SUMMARY49
CONCLUSIONS51
RECOMMENDATIONS53
<u>Tables</u>
1. Dams and reservoirs in the Colorado River Basin
Figures
1. Mean monthly flows on the Colorado River below Hoover Dam
<u> 114 55 </u>
 Dams and tributaries of the main stem, Lower Colorado River. Area subject to inundation, Needles, California. Area subject to inundation, Parker Strip, California, and Arizona. Area subject to inundation, recreational development between Parker, Arizona, and Blythe, California. Area subject to inundation, retirement and recreational development near Blythe, California. Area subject to inundation, Riverside development at Blythe,
California. 7. Area subject to inundation, Yuma, Arizona.

CONTENTS - (Continued)

APPENDIXES

- A. Engineering.
- B. Existing riverworks.
- C. Economic evaluation of alternative plans.
- D. Evaluating the threat of overflows into the United States.
- E. Finding of No Significant Impact and Environmental Assessment on Alternative Hoover Dam Flood Control Operating Criteria.
- F. Recommended field working agreement between Department of the Interior, Bureau of Reclamation, and Department of the Army, Corps of Engineers.
- G. Agency views and responses.

BUREAU OF RECLAMATION MAPS

Nos. 423-300-1455 and 423-300-1412 through 1434 (23 Sheets)

INTRODUCTION

Flows on the Colorado River below Hoover Dam, following the closure of Glen Canyon Dam in 1963 until May 1979, were limited to water-user requirements plus downstream tributary inflows. The resultant lack of high flows encouraged encroachment of permanent and semipermanent development into portions of the floodway that had at one time served to convey the floodflows. Also, during the period 1963 to June 1980, Lake Powell behind Glen Canyon Dam gradually filled. Consequently, once again there is a high prospect of a need for large flood control releases from Hoover Dam. Because of the above-normal runoff during water year 1980 along with the filling of Lake Powell, releases were made from Hoover Dam in excess of downstream demands to minimize the probability of having to make later mandatory flood control releases that would have been damaging.

The flood control operation plan devised in 1968 was intended to control flooding to the greatest extent possible, with outflows from Hoover Dam limited to 40,000 cubic feet per second (ft³/s) because a release of 40,000 ft³/s at that time would have caused minimal damage in the downstream flood plain. Today, however, because of the encroachments into the floodway in the intervening years, a release of 40,000 ft³/s from Hoover Dam would cause extensive property damage.

PURPOSE AND AUTHORITY

The purpose of this study is to determine and select the best water control plan for flood control operation of Hoover Dam.

The basic authority for this study and report is contained in Section 7 of the Flood Control Act of 1944 (33 U.S.C. sec. 709). This act reads in part:

Hereinafter, it shall be the duty of the Secretary of War to prescribe regulations for the use of storage allocated for flood control or navigation at all reservoirs constructed wholly or in part with Federal funds provided on the basis of such purposes, and the operation of any such project shall be in accordance with such regulations * * *.

Rules and regulations (33 C.F.R., sec. 208.11) published in "The Federal Register," Vol. 43, No. 199, Friday, 13 October 1978, provide for the revision of water control plans "# # to reflect changed conditions that come to bear upon flood control and navigation # # #."

SCOPE OF STUDY

The scope of study includes the Lower Colorado River flood plain below Hoover Dam, as well as such diverse interests as power markets in Arizona, Nevada, southern California, southern Utah, and western New Mexico; irrigation districts in Arizona and California; municipal water supplies for Las Vegas, Nevada, as well as for Los Angeles, San Diego, and other cities in southern California; and recreation beneficiaries in all the bordering states.

This report is based on a study that began in April 1977 for the purpose of providing a sound basis for evaluating alternative flood control operating plans.

Detailed studies for the report were a cooperative effort between the Lower Colorado River Regional Office of the Bureau of Reclamation and the Los Angeles District, Corps of Engineers. The detailed investigations included hydraulic and hydrologic studies, economic studies, environmental studies and mapping of populated areas at Yuma, Blythe, and Needles and the reach between Parker and Parker Dam, commonly known as the Parker Strip. (See location map 423-300-1455 in the section of this report titled "Bureau of Reclamation Maps.") In addition, the International Boundary and Water Commission, United States, and Mexico provided information on the potential impacts of floodflows in Mexico.

Flood frequency studies were based on the modified record of streamflows on the Colorado River. The Bureau of Reclamation, using its Colorado River Storage Project Simulation Model (appendix A), operated on the basic record to produce outflow values that would have occurred at Hoover, Davis, and Parker Dams under the operating conditions of each alternative considered. The Los Angeles District then used the outflow values to develop volume-frequency curves for the Colorado River flows of 1-, 6-, and 12-month duration just below Hoover and Parker Dams and at Blythe, California, and Yuma, Arizona, for each alternative. Only flows passing through Hoover Dam were included in the frequency curves.

Adding downstream tributary flows (pl. 1) to the released flows from Hoover Dam was considered during the study. However, no rational method for combining these flows for all locations along the Lower Colorado River could be devised nor would their effect on plan selection be important. Because of the high degree of control of the Bill Williams River by Alamo Dam, the effect of this large tributary on Lower Colorado River flows is small. The effect of uncontrolled tributaries, including the large drainage area of the Gila River below Painted Rock Dam, on Colorado River flows downstream from Hoover Dam would be to increase short-term peaks for short distances downstream from the tributary mouths. Although the effects of the uncontrolled tributaries on the volume-frequency curves for Hoover Dam releases would be small, and therefore, are not highly significant for this study, they should not be overlooked when short-term peak flooding problems are considered for flood plain management purposes. In general, travel times of flows

*

from Hoover Dam are too long to permit the operation of Hoover Dam to mitigate the impacts of short-term tributary inflows. Releases that would be additive to tributary peaks would already be in the river by the time the tributary peak was recognized.

The Los Angeles District used the HEC-2 backwater computer program to perform the hydraulic studies to determine the areas subject to flooding by several sizes of floods along the Lower Colorado River. Detailed topography (scale of 1 in. = 100 ft, 2-ft contours) was developed to determine areas subject to flooding in the populated areas at Yuma, Blythe, and Needles, and between Parker and Parker Dam. The Bureau of Reclamation provided areas of inundation for less populated areas, and these were developed with the use of existing cross-section and water-surface-profile data and the U.S. Geological Survey quadrangle maps (1 in. = 2,000 ft) and Bureau of Reclamation orthophotomaps (1 in. = 2,000 ft). The areas of inundation maps were used to determine damage-discharge relationships for the economic studies.

Economic studies included the determination of benefits (hydropower, water conservation, salinity reduction, and flood damage reduction) that would result from implementing each alternative. The Bureau of Reclamation determined the hydropower, water conservation, operation and maintenance, and salinity benefits; and the Los Angeles District, Corps of Engineers, estimated the flood damages. The benefits were used to compare the relative economic merits of the alternatives.

The Bureau of Reclamation conducted studies to determine the environmental impacts of the various alternatives; and furnished its "Environmental Assessment on Alternative Hoover Dam Flood Control Operating Criteria, and Finding of No Significant Impact" for inclusion into this report as appendix E. Extensive existing data from USBR files, including vegetation maps, mammal and bird counts, and cultural survey reports, formed the basis for an inventory of natural and cultural resources.

Aerial topography obtained along four of the more populated reaches of the river was used to determine detailed inundation areas for economic studies. These four reaches included:

- a. One reach about 17 miles long from Parker Dam to just downstream from Parker, Arizona.
- b. A second reach about 7.5 miles long from about 5 miles upstream to about 2.5 miles downstream from Needles, California.
- c. A third reach about 9 miles long from about 3.5 miles upstream to about 5.5 miles downstream from Blythe, California.
- d. A fourth reach about 7 miles long from just upstream to about 5.5 miles downstream from Yuma, Arizona.

The aerial topography was plotted on maps at a scale of 1 in. = 100 ft with 2-ft contours.

Nothing in this report is intended to interpret the provisions of the Colorado River Compact (45 Stat. 1057), the Upper Colorado River Basin Compact (63 Stat. 31), the Water Treaty of 1944 with the United Mexican States (Treaty Series 994, 59 Stat. 1219), the decree entered by the Supreme Court of the United States in Arizona v. California, et al. (376 U.S. 340), the Boulder Canyon Project Act (45 Stat. 1057), the Boulder Canyon Project Adjustment Act (54 Stat. 774; 43 U.S.C. 618a), the Colorado River Storage Project Act (70 Stat. 105; 43 U.S.C. 620), or the Colorado River Basin Project Act (82 Stat. 885; 43 U.S.C. 1501).

STUDY PARTICIPANTS AND COORDINATION

The Lower Colorado Regional Office of the Bureau of Reclamation and the Los Angeles District, Corps of Engineers were jointly responsible for planning and carrying out the detailed studies for this report. Periodic working-level meetings provided the primary coordination between the two responsible agencies, and were also attended regularly by a representative of the United States Section of the International Boundary and Water Commission to assure that conduct of the study and its results would be consistent with the United States Government's water and boundary treaties and agreements with Mexico. Also in attendance at these meetings at various times were representatives of the States of Arizona, California, and Nevada, the Upper Colorado Regional Office and the Engineering and Research Center of the Bureau of Reclamation; and the U.S. Geological Survey.

The study was announced in the following three ways:

- a. A letter signed jointly by the Regional Director of the Lower Colorado Region, Bureau of Reclamation, and the District Engineer of the Los Angeles District, Corps of Engineers.
- b. A news release.
- c. A brochure, dated March 1977 and titled "High Water in the Colorado River?"

The letter, distributed to governmental agencies (Federal, State, and local), irrigation districts, and tribal councils in the Lower Colorado River Basin, explained briefly the need for the study and solicited comments and suggestions on identifying impacts, developing alternatives, and accomplishing public involvement. The news release, distributed to newspapers and radio and television stations throughout the Lower Colorado River Basin and to areas of potential interest outside the basin, was aimed at a much broader public and explained the problem briefly and solicited comments. The brochure, designed by the Bureau of Reclamation, provided a fairly detailed description of the problems for the general public.

During the study, six public meetings were held at Needles, Blythe, and Los Angeles, California; and Parker, Yuma, and Phoenix, Arizona. Subsequent meetings were held with agencies having fish and wildlife responsibilities; three Indian groups (Cocopah, Quechan, and Colorado Indian Reservation); the Upper Colorado River Commission; and the State of Arizona, Division of Emergency Services. The meetings were held for the purposes of: explaining and quantifying the problem in detail; presenting plans formulated to that point in time and their impacts; and soliciting (a) comments on those plans and (b) suggestions for alternative plans.

PRIOR STUDIES AND REPORTS

Although many reports concerning studies of the Colorado River have been written, only those that are most germane to determining the best flood control operation for Hoover Dam and Lake Mead are described here.

The Los Angeles District's "Report on Reservoir Regulation for Flood Control - Storage at Hoover Dam and Lake Mead," completed in September 1955 and revised in November 1968, established the fundamental flood control operation criteria upon which all subsequent operational alternatives were based.

The first formal report that specifically addressed the filling of upstream reservoirs and the growing potential for large flood control releases from Hoover Dam was titled "River Flows Between Davis Dam and Yuma, Arizona, Lower Colorado River, A Forecast of Conditions and Impacts for the Period 1977 to 1986," published in October 1976 by the Bureau of Reclamation.

This same agency's series of four flood plain information (FPI) reports published between 1969 and 1974 covered most of the Colorado River below Hoover Dam. The reaches covered and the publication dates of these reports are: Davis Dam to Topock, March 1969; Parker Dam to Headgate Rock Dam, July 1971; Palo Verde Dam to Imperial Dam, October 1974; and Imperial Dam to San Luis, August 1973. These FPI reports establish the "levee design flood" as the basic planning flood; that is, future development should be protected from the levee design flood, and structural flood protection works should be designed to control the levee design flood.

In January 1977, the Bureau of Reclamation published a report, titled "Economic Effects on Riparian Facilities of Increased Overflows in the Colorado River." This report was a limited attempt at establishing the magnitude of flood damages that might be caused by flood control releases at Hoover Dam.

Reports published every 2 years by the Bureau of Reclamation cover the status of the agency's long-term study for the improvement of the quality of Colorado River water. The program emphasizes the monitoring and evaluation of control measures for salinity—the major water quality problem in the river.

THE REPORT

This report is comprised of a main report and pertinent appendixes. The main report summarizes the results of the study in nontechnical fashion and recommends a flood control operation plan for Hoover Dam. The appendixes discuss engineering aspects of the study, describe existing river works along the Lower Colorado River, evaluate economically the alternative plans, evaluate the threat of Colorado River overflows from Mexico into the United States, and provide a Finding of No Significant Impact and an Environmental Assessment. The appendixes also include the text of the recommended Field Working Agreement between the Department of the Interior, Bureau of Reclamation, and the Department of the Army, Corps of Engineers, Regarding Flood Control Operation of Hoover Dam and Lake Mead, Colorado River, Nevada-Arizona; and, in addition, agency views and responses.

RESOURCES AND ECONOMY OF THE STUDY AREA

The geographic area addressed in this study is composed of two disparate parts: (a) the flood plain of the Lower Colorado River and (b) the market areas that are the beneficiaries of Colorado River-produced hydropower, diversions of Colorado River water for consumptive uses, and Colorado River-based recreation, which attracts participants from hundreds of miles away. Even a cursory observation shows that the Colorado River is not only the dominant economic force in the Lower Colorado River Basin, but it is also an extremely important resource to much of the southwest United States.

ENVIRONMENTAL SETTING AND NATURAL RESOURCES

Most of the Colorado River Basin below Hoover Dam is composed entirely of desert. Downstream from Lake Mead and Hoover Dam, the river passes alternately through narrow canyon defiles and broad valleys. The canyons are formed by steep, rugged, and rather barren hills and low mountains. The same type of terrain frames the valleys except in the south near Yuma where the valley broadens substantially.

The climate of the flood plain of the Lower Colorado River is notable for its lack of precipitation and high summer temperatures, routinely exceeding 100° F. Temperatures above 120° have been recorded in the lower basin. Mean annual precipitation ranges from less than 3.5 inches per year in Yuma to about 6 inches per year near Hoover Dam.

The flood plain of the Lower Colorado River contains a variety of natural vegetation. Three different and distinct deserts—the Mohave, the Western Sonora, and the Eastern Sonora—merge in the flood plain. Many of the desert plant species, such as creosote bush, mesquite, salt bush, and ironwood, are common to more than one of the contributing deserts. Each of the deserts, however, makes its own peculiar contributions. The giant saguaro cactus and cootillo grow in the Eastern Sonora desert; the Mohave desert is noted for its Joshua trees; and the Western Sonora produces palo verde trees, smoke trees, and desert willow.

The Colorado River itself compliments the biotic community of the flood plain by supporting large riparian and phreatophytic (dependent on ground water) vegetation subcommunities. At various locations along the river, marshes support cattail, bulrush, reeds, and willows. Much of the river is lined along its banks with tamarisk (salt cedar), cottonwood trees, and other phreatophytes. Depending on topography, soil conditions, and the extent of disturbance by man, the strips of phreatophytes can range from less than 100 to thousands of feet wide.

Wildlife in the flood plain of the Lower Colorado River is as diverse as its vegetation, once again due in part to the influence of the river. Without the river, the wildlife community would be limited to those species that can survive in a harsh desert atmosphere of searing temperatures and desiccating dryness. The flood plain of the Lower Colorado River supports the entire spectrum of insects, arthropods, mammals, reptiles, and birds that are adapted to living in the deserts of the southwest. This desert wildlife population is greatly augmented by many species dependent upon the food and cover provided by vegetation supported by the river. The availability of surface water in the Colorado River further expands the wildlife community by supporting fish, waterfowl, amphibians, and water-oriented mammals such as racoon and muskrat. The environmental assessment included in this report provides a limited inventory of the wildlife inhabiting the Lower Colorado River.

The principal natural resources of the Lower Colorado River flood plain exploitable by man are soil, water, and climate. Through countless years of untamed flooding and meandering, the Colorado River and its major tributaries laid down broad plains of fertile alluvial soils in the deserts of California and Arizona. Today, these rivers are extensively controlled and provide the vital irrigation water that supports a vast agricultural industry. The waters of the Lower Colorado are further exploited to produce hydropower and to support thirsty urban populations from as far away as Los Angeles and San Diego, California, and soon Phoenix, Arizona. Recreational activities, such as swimming, boating, camping, fishing, and water skiing, which are directly dependent on Colorado River water, rival agriculture in economic importance in the Lower Colorado River Basin.

The climate of the southwest deserts provides one of the longest growing seasons in the world, with frost a rarity. For those who wish to enjoy it, there are the cooling waters of the river and its shading vegetation along with the summer sunshine and clear skies of the region. Warm winter temperatures permit fishing and camping in relative comfort.

ECONOMIC DEVELOPMENT IN THE FLOOD PLAIN

In general, the economic development in the study area is oriented to the river. Along the length of the Lower Colorado River, there are four main regimes of development: agriculture, recreation, tourism, and retirement. These are present in various combinations in the study area, with some aspects of each present in all reaches. The predominant incidence of agriculture is on the Indian Reservations, in the Palo Verde Valley (Blythe), and in the flood plain area of Yuma. The Parker Strip (between Parker Dam and the town of Parker) is the most intensively developed recreational area. Many, if not most, of the residences along this area are either retirement homes or second (vacation) homes. Blythe and Needles both benefit greatly from the tourist traffic along Interstate Highways 10 and 40, respectively. Of the two towns, Needles is the most dependent on tourist traffic.

ECONOMIC OPERATIONS OUTSIDE THE FLOOD PLAIN

The economic importance of the Lower Colorado River extends far beyond its flood plain. Water from the river supports hundreds of thousands of irrigated acres in Nevada, Arizona, and California. Some of the most productive agricultural areas in the nation are located in the Lower Colorado River Basin around the centers of Blythe, Needles, and the Imperial Valley in California; and the Parker Valley and Yuma in Arizona. The production of this vast agricultural complex, worth billions of dollars each year, is almost totally dependent on Colorado River water.

The Lower Colorado River is also an important source of municipal and industrial water for many communities in Nevada, Arizona, and California. The Metropolitan Water District of Southern California, which serves much of the metropolitan area around Los Angeles, is one of the larger customers for municipal and industrial use of Lower Colorado River water.

Relatively inexpensive hydroelectric power produced by power plants at Hoover, Davis, and Parker Dams is another Lower Colorado River resource of great importance outside the flood plain. In 1977, over 3,820 million kilowatt hours of power were produced at Hoover Dam. Additionally, 1,262 million kilowatt hours were produced at the Parker-Davis complex. Customers in California, Arizona, and Nevada paid in excess of \$21 million for hydropower from Hoover, Davis, and Parker Dams in 1977. Customers for this hydropower included such cities as Burbank, Glendale, and Pasadena, California, and Boulder City, Nevada; military installations, irrigation districts, and Indian reservations; Arizona Power Pooling Authority; Division of Colorado River Resources, State of Nevada; Los Angeles Department of Water and Power; Metropolitan Water District of Los Angeles; Southern California Edison; and others.

Assessing the economic impact of recreation based on the Colorado River outside the flood plain is more difficult than for water supplies and power generation. If the river-based recreation were not available, many of the recreational dollars would be spent on other recreational alternatives. However, the great extent and distinct character of the riverine recreation may well promote a net increase in recreational expenditures, some of which occur outside the flood plain. The river certainly influences the type of recreational expenditures. Power boats and boat trailers, dune buggies, water skis, fishing tackle, campers, and tents are all routinely purchased in Los Angeles, and Phoenix, and in smaller towns in California, Arizona, and Nevada for use on the Colorado River. Finding alternate sites within an easy day's drive for the use of such equipment would not be an easy task.

PROBLEMS, NEEDS, AND OPPORTUNITIES

This section identifies and discusses the problems and needs of the study area. All the problems, needs, and opportunities normally associated with water resources development, water conservation, hydroelectric power generation, recreation, protection of wildlife resources, flooding, and water quality are extant in the study and all have been addressed in the past through various treaties, laws, court decisions, agreements, structural measures, and practices. Past measures have, in a sense, become part of the current "problem" since they must be taken into account in future planning efforts.

EXISTING PLANS AND IMPROVEMENTS

Understanding the range of water resource problems along the Colorado River and the relationship of the problems to each other requires some knowledge of the existing improvements and facilities along the river. Some of the requisite background knowledge was provided in a previous section of this report titled "Resources and Economy of the Study Area." The following paragraphs describe and discuss specific structures related to water resources.

Numerous dams and reservoirs have been constructed on the Colorado River and its tributaries. Table 1 lists the more pertinent structures along with their purposes and other information. The frontispiece shows the locations of the dams and reservoirs.

In addition to the storage dams listed in table 1, several diversion dams direct water from the Lower Colorado River into canal systems serving various areas in the lower basin. Headgate Rock Dam, located near Parker, Arizona (pl. 1), diverts water to serve Parker Valley. The Palo Verde Diversion Dam regulates flows to canals in the area of Blythe, California. Imperial Dam controls diversions into an elaborate system of canals that serves both sides of the river in the Yuma area, as well as the vast agricultural complex of the Imperial Valley in southern California.

The construction of dams on the Colorado River resulted in secondary problems that have assumed great importance. Although the flow of the river had been regulated, instability of the river channel itself had not. Consequently, the river itself had to undergo significant changes as it adjusted to its new environment. Each reservoir, acting as a sediment trap, cleared up the muddy water and released clear water, which then picked up sediment that had been deposited by earlier floods. The sediment thus picked up moved downstream and was deposited on the riverbed in the slow-moving water at the head of the next reservoir. Thus the reaches of the river below the dams were scoured and deepened whereas other reaches like Topock Gorge and the reach of the river above Imperial Dam were raised by extensive sediment deposits.

Table 1. Dams and reservoirs in the Colorado River Basin.

				Maximum active storage of
<u>Name</u>	Stream			dam/reservoir
Dam/reservoir	(State)	Owner	Purposes	(Ac-ft)
Upper Basin	Conner B	USBR	David Class and Stab	akk Roo
Fontenelle Res.	Green R. (Wyoming)	USBK	Power, flood control, fish and wildlife, recreation	344,800
Flaming Gorge Res.	Green R. (Utah, Wyo)	USBR	River regulation, power, recreation, fish and wildlife	3,749,000
Blue Mesa Res.	Gunnison R. (Colo.)	USBR	Water conservation, river regulation, power, recreation, fish and wildlife	829,500
Morrow Point Res.	Gunnison R. (Colo.)	USBR	Power	117,000
Crystal Dam	Gunnison R. (Colo.)	USBR	Reregulation of Morrow Point releases, power	17,600
Navajo Dam & Res.	San Juan R. (New Mex.)	USBR	Water conservation, flood control, recreation	1,696,400
Glen Canyon Dam, Lake Powell	Colorado R. (Ariz., Utah)	USBR	Power, recreation, fish and wildlife	25,002,000
Lower Basin Hoover Dam, Lake Mead	Colorado R. (Nev., Ariz.)	USBR	Flood control, water conservation, power, recreation fish and wildlife	27,377,000
Davis Dam, Lake Mohave	Colorado R. (Nev., Ariz.)	USBR	Reregulation, water conservation, power, recreation	1,810,000
Parker Dam, Lake Havasu	Colorado R. (Nev., Ariz.)	USBR	Forebay for MWD aqueduct power, flood control, river regulation, recreation	619,400
Alamo Dam and Res.	Bill Williams (Ariz.)	COE	Flood control, water conservation, and recreation	1,043,000
Painted Rock Dam and Res.	Gila (Ariz.)	COE	Flood control	2,491,700

Note: Some dams on lower basin tributaries are not included because of their limited effect on the Colorado River, which is due to distance from the main stem and relatively dry watersheds. Diversion dams providing little or no storage are not included.

The effects of the raised riverbod in Topock Gorge extended north to the City of Needles where a portion of the city became inundated. This emergency situation at Needles led to new legislation designed to deal with river problems along the entire lower river below Hoover Dam. Earlier authority under the Colorado River Front Work and Levee System Act was expanded in 1946 to permit the Bureau of Reclamation to initiate an active Lower Colorado River management program. Initially, the goal was to prevent flooding and destruction of lands resulting from meander of the river and deposition of sediment in the river channel. It soon became apparent, however, that other objectives needed to be incorporated in project plans. These included salvaging water, stabilizing and enhancing fish and wildlife habitats, and improving recreational opportunities. Appendix B describes in detail the channelization, levee construction, dredging, and related activities of the Bureau of Reclamation along the Lower Colorado River.

FLOOD HISTORY

Prior to construction of Hoover Dam, high flows along the Lower Colorado River occurred seasonally, and damaging flows were common. Floods occurred as a result of the snow melt runoff, large rainstorms in the upper basin, and rainfloods on the larger tributaries. The largest flood for which a historical record exists occurred in 1884. E. B. Debler, Bureau of Reclamation hydrologist, estimated that the peak flow of the 1884 flood at Black Canyon, site of Hoover Dam, was between 250,000 and 300,000 ft 3 /s. Historical and modern records show that annual maximum peak flows at Black Canyon have probably exceeded 100,000 ft 3 /s 31 times between 1878 and 1976; and during the same period, peak flows estimated in excess of 200,000 ft 3 /s occurred 3 times.

Most early accounts concentrate on flood damages occurring in the Yuma area. Levee construction to provide protection from floods at Yuma was begun as early as 1902. Undoubtedly, the most dramatic incident related to early Colorado River floods was the 2-year fight during 1905 and 1906 to stop the flow of the river through an irrigation cut leading to the Alamo Canal and the Imperial Valley. Unusually high flows occurred on both the Gila and Colorado Rivers during this period; and at one time, the antire flow of the Colorado River was accidentally passing through the diversion. Ponding of the diverted flows in the Salton Sink formed the Salton Sea.

With the completion of Hoover Dam in 1935, control of most floods on the Colorado River to an outflow of $40,000~\rm{ft^3/s}$ became possible. If a flood equal in magnitude to the 1884 flood were to occur again, it could be regulated sufficiently to reduce the peak inflow of about $300,000~\rm{ft^3/s}$ to a peak outflow of $73,000~\rm{ft^3/s}$. Inflow records show that the floods of 1941, 1952, and 1957 were the largest floods that have occurred since the construction of Hoover Dam. In 1941 a maximum mean daily inflow of 119,200 $\rm{ft^3/s}$ was reduced to a maximum mean daily outflow of $35,500~\rm{ft^3/s}$. In 1952 the maximum mean daily inflow of $100,000~\rm{ft^3/s}$ was reduced to a maximum mean daily outflow of $100,000~\rm{ft^3/s}$ was reduced to a maximum mean daily outflow of $100,000~\rm{ft^3/s}$ was reduced to a maximum mean daily outflow of $100,000~\rm{ft^3/s}$

 $\rm ft^3/s$. In 1957 a maximum mean daily inflow of 124,000 $\rm ft^3/s$ was reduced to a maximum mean daily outflow of 18,400 $\rm ft^3/s$. Each of these floods would have caused damage estimated at many millions of dollars to private property, public utilities, and flood-contol structures had Hoover Dam not been constructed.

FLOOD PROBLEM

Few, if any, structures were located in the 40,000 ft³/s flood plain in the lower Colorado River at the time of the closure of Hoover Dam (1935) and for some years thereafter. For many years the flood control operation plan for Hoover Dam has incorporated a "target maximum" flood control release of 40,000 ft3/s. A "target maximum" release is one that is not exceeded unless absolutely necessary. Encroachment of development into the flood plain in the last several decades has created a situation in which significant damages would now result from a release of 40,000 ft³/s. Substantial damages in the Parker Strip would be caused by sustained release from Hoover Dam of over 28,000 ft³/s. Several conditions have contributed to increased development in the Lower Colorado River flood plain: (1) lack of large flood control releases from Hoover Dam, (2) extensive growth in waterbased recreation along the river, (3) lack of strong land use controls, and (4) encroachment of vegetation, especially in the Yuma area, which also reduces the flood-carrying capacity of the river.

Since the closure of Hoover Dam, flood-control releases in excess of 30,000 ft 3 /s have been required five times: in 1939, 1941, 1942, 1952, and 1958. On only two occasions, 1941 and 1942, have these floods had sufficient volume to require sustained releases over 30,000 ft³/s from Parker Dam. The construction of a system of reservoirs upstream from Hoover Dam during the period 1962 to 1966 has eliminated the need for flood control releases at Hoover in recent years. The upstream reservoir system has a combined storage capacity of over 33 million acre-feet. The largest single reservoir of the system is Lake Powell behind Glen Canyon Dam completed in 1963. Lake Powell has an active storage capacity of about 25 million acre-feet. Lake Powell did not completely fill until June 1980. Figure 1 shows a graph of maximum monthly flows since 1906 on the Colorado River below Hoover Dam. graph illustrates both the dramatic effect of Hoover Dam on river flows and the further dampening effect of Lake Powell and the other upstream reservoirs.

Hoover Dam, along with Parker Dam, completed in 1938, has converted the once wild and violent Lower Colorado River into a domesticated and dependable stream with clean water and consistent size and depth in many locations. The river and its artificial lakes and wetlands have provided unique recreational and economic opportunities in a region otherwise hot, barren, and dry. Recreational users of the Lower Colorado come from nearby towns and farms and from as far away as Los Angeles, California, and Phoenix, Arizona, for boating, fishing, rafting, tubing, and camping. Many retirement developments have also

sprung up along the river to take advantage of the recreational opportunities as well as the warm, dry climate. Because the river is the main attraction of the area, recreational users, commercial developers, and retirees have tended to build their structures as close to the river as possible, making them vulnerable to the river at flood stage.

Many political entities, including Federal agencies, Indian tribes, states, counties, and cities have jurisdiction over land use of various segments along the Lower Colorado. For many reasons (apathy, ignorance of the potential problem, political and economic pressures, insufficient enforcement resources, and poorly defined authorities and rights), strong control over land use along the river has not been exercised in the past. More recent Federal, State, and local policies and programs are improving the management of flood-prone areas along the river. Executive Order 11988, Flood Plain Management, signed 24 May 1977, requires Federal agencies to provide leadership and to take action to:

- a. Avoid usage of the base (100-year) flood plain unless it is the only practicable alternative.
- b. Reduce the hazard and risk of flood loss.
- c. Minimize the impact of floods on human safety, health and welfare.
- d. And, restore and preserve the natural and beneficial flood plain values.

The provisions of Public Law 93-234 (Flood Disaster Protection Act of 1973) require communities, as a condition of future Federal assistance, to adopt zoning and land-use ordinances that control development of land subject to flooding. It also requires the purchase of flood insurance by property owners who are being assisted by Federal programs in the improvement of land or facilities located in flood hazard areas. Another important requirement of the Flood Disaster Protection Act is the expeditious identification and dissemination of information concerning flood-prone areas.

Arizona Revised Statute 45-2342 provides for the management of flood plains within Arizona by local flood plain boards. The local governing bodies are responsible for delineating flood plain areas. Arizona accepts flood hazard information developed by Federal agencies and endorses the use of these reports in delineating the flood plain areas.

Once the flood plain has been defined, the flood plain boards have the additional responsibility to adopt flood plain regulations governing construction within the flood plain. Among these are the prohibition of construction that may divert, retard, or obstruct floodwaters and the regulation that dwellings built within a flood plain shall be constructed to place the minimum floor elevation of the dwelling above the expected level of the 100-year-frequency flood.

The Bureau of Reclamation has been assigned the flood plain management responsibility for the lower Colorado River by the Boulder Canyon Project Act and the Colorado River Front Work and Levee System Act. The Bureau has actively carried out its responsibilities with respect to management of the river channel and its adjacent flood plain, as well as in the dissemination of flood hazard information to the public, within its authorities. The community awareness activities of the Bureau have included presentations to real estate organizations, chambers of commerce, and publication of flood plain maps and reports.

The Colorado River Front Work and Levee System is authorized by several acts, beginning as early as 1925. The most important act is that of June 28, 1946, which authorized appropriations to the Bureau of Reclamation for the purpose of:


- 1. Operating and maintaining the Colorado River Front Work and Levee System in Arizona, Nevada, and California;
- 2. Constructing, improving, extending, operating, and maintaining protection and drainage works and systems along the Colorado River;
- Controlling said river, and improving, modifying, straightening, and rectifying its channel; and
- 4. Conducting investigations and studies in connection therewith.

Appendix B of this report describes Bureau of Reclamation river works along the Lower Colorado River.

As the Colorado River reservoir system fills (fig. 2), the flood potential along the river below Hoover Dam approaches conditions of the post-1935 period when flood releases from Hoover Dam in excess of 30,000 ft³/s were more frequent. The U.S. Bureau of Reclamation maps 423-300-1412 through 1434, inclusive, and plates 2 through 7 show the outlines of areas that would be inundated by various sizes of floods. Flood frequency studies in which a repetition of historical flows was assumed show that, when the reservoir system is filled, there would be about a 10-percent chance in any given year for sustained releases averaging 28,000 ft³/s or more for 1 month from Hoover Dam under the current operation plan.

Aside from some low-lying agricultural, recreational, and wildlife preserve areas, Parker Strip is the Lower Colorado River reach most vulnerable to flood damages. Damages would begin to occur with flows in excess of about 25,000 ft³/s. (See pl. 3, sheets 1-4.) Property valued at nearly \$800,000 would be susceptible to damage from a flow of 30,000 ft³/s. Damages that would result from flow of 30,000 ft³/s through Parker Strip are estimated at about \$150,000. A flow of about 50,000 ft³/s (about a 400- to 500-year flood) through Parker Strip would cause damages estimated at about \$1.4 million to property valued at over \$4.7 million. Types of property subject to damage in Parker Strip include residential, mobile homes, commercial, apartments and condominiums, recreational facilities, public property, and agricultural land.

Figure 1. Mean monthly flows on the Colorado River below Hoover Dam.

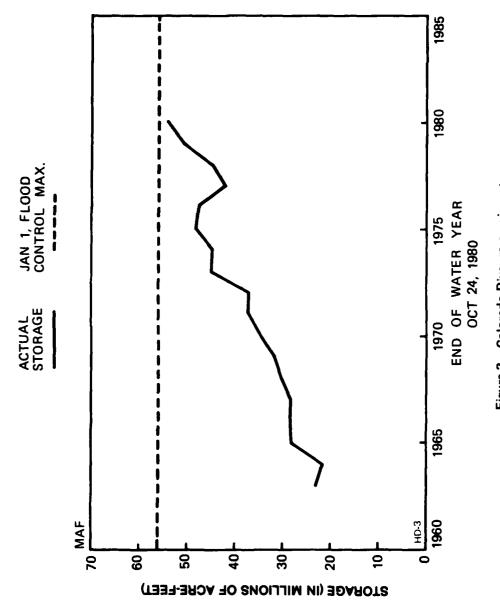

Flood damages at Needles would begin when flows exceed 30,000 ft 3 /s. (See pl. 2.) A flow of 40,000 ft 3 /s (about a 200-year flood under the current operation plan) would cause an estimated \$10,000 damage to residential property on the east bank. Damages would increase rapidly for flows in excess of 40,000 ft 3 /s. A flow of 50,000 ft 3 /s would cause estimated damages of \$41,000 to residential property and over \$1.7 million to agricultural development.

Damages in the Blythe area solely from Hoover Dam releases would be rare under the current operation plan. Flood damages at Blythe would begin to occur when Colorado River flows exceed $38,000 \text{ ft}^3/\text{s}$. (See pl. 5.) The frequency of a flow at Blythe of $38,000 \text{ ft}^3/\text{s}$ resulting from releases at Hoover Dam is about once in 300 to 400 years. Damages from a flow of $50,000 \text{ ft}^3/\text{s}$ at Blythe are estimated at \$199,000 to residential property and \$22,000 to mobile homes. (The damage cost to mobile homes is the estimated cost of moving them to safety.)

The existing levees at Yuma are capable of containing flows up to nearly 140,000 ft 3 /s. However, existing development located between the levees is vulnerable to damage from smaller flows. Some low-lying agricultural fields would be flooded at a flow of about 16,000 ft³/s. A flow of 16,000 ft³/s at Yuma resulting totally from Hoover Dam releases could be expected about once in every 3 to 4 years on the average. A flow of 40,000 ft³/s would cause about \$200,000 damage to about half a dozen farm structures between the Yuma levees. A flow of this magnitude resulting wholly from Hoover Dam releases would be quite rare--about once in 400 to 500 years under the current operation plan. A flow of 71,000 ft³/s would flood all development between the Yuma levees, including about 54 structures, some of which are houses. It should be noted that, because of extensive growth of vegetation in the floodway at Yuma in recent years, the channel capacity between the existing levees has been reduced below the design value. A study is currently under way to assess the means of solving this problem.

The actual frequency of the flooding between the Yuma levees would be increased somewhat by flows from the Gila River. Infrequent flooding at Yuma can occur as a result of summer rainstorms centered on the Colorado River drainage area below Parker Dam or on the Gila River below Painted Rock Dam. Summer rainfloods in the Lower Colorado River Basin normally occur July through September and occasionally in June. Since Hoover Dam cannot be operated to compensate for rapidly rising rainflood peaks on the downstream watershed, there is a potential for rainflood peaks at Yuma adding to releases from Hoover Dam.

A somewhat greater possibility exists for flood control releases of flood runoff from Painted Rock Dam combining with snowmelt releases from Hoover Dam. Although no statistical studies have been made to determine the correlation between snowmelt floods on the Colorado and Gila Rivers, a correlation probably exists and probably increases with the size of event on the Colorado River. Most snowmelt floods on the Gila River can be controlled with peak flows not exceeding a few thousand ft³/s at Yuma. However, Painted Rock Dam releases for floods in excess of the

50-year event could be as high as 22,500 ft 3 /s. The largest floods on the Gila River above Painted Rock Reservoir would be generated by warm rain falling on snow. Except in very rare events, Hoover Dam could be operated to minimize the combined peak at Yuma for the following reasons: (1) The period for which large release would be required at Painted Rock is relatively short, about 8 to 10 days at 22,500 ft 3 /s for the 100-year event; and (2) large releases from Painted Rock Dam are most likely to occur in the early spring, prior to mid-March, whereas large snowmelt releases from Hoover Dam are more likely to occur in late spring or summer.

The effect of Hoover Dam releases on the natural environment along the Lower Colorado River would be mixed. Sustained flows up to 20,000 ft 3 /s would be predominantly beneficial to terrestrial and aquatic habitats from Davis Dam to Imperial Dam. As flows increase above 20,000 ft 3 /s, potential for damage to terrestrial and aquatic habitats increases, especially through Topock Gorge, from Agness Wilson Road to Palo Verde Dam, and from Adobe Ruins to Imperial Dam. Flows above 30,000 ft 3 /s would have some detrimental effects over the entire Davis Dam to Imperial Dam reach.

Below Imperial Dam, sustained flows up to $10,000 \, \mathrm{ft^3/s}$ would be predominantly beneficial to terrestrial and aquatic habitats. As flows increase above $10,000 \, \mathrm{ft^3/s}$, the potential for damages to terrestrial and aquatic habitats increases along this reach. Because of the current channel conditions, the low past-flow regime, and proximity of vegetation to the river, the potential is high for some long-term loss of terrestrial habitats below Imperial Dam.

From an environmental standpoint, the time of year large releases from Hoover Dam occur is probably more important than the size of release. Large releases in the spring and summer would be the most detrimental because they would disrupt the nesting and breeding of most wildlife species and would cause inundation of plant communities during the growing season.

Endangered wildlife that might be disturbed by Hoover Dam releases are limited to a few bird and fish species. The Yuma clapper rail and peregrine falcon are the only endangered bird residents in the flood plain. Peregrine and prairie falcons are transient visitors to the Lower Colorado River Basin, and the bald eagle may visit there on rare occasions. The Colorado River squawfish and the woundfin, once native to the waters of the study area, are no longer found below Hoover Dam. The bonytail chub and the razorback sucker, designated as rare in California by the Department of Fish and Game, are occasionally found in the Lower Colorado River Basin. The bonytail chub is federally designated as endangered and is classified as Group II (in danger of being eliminated) in Arizona. Additionally, the razorback sucker is listed as Group III (a species whose status may be in jeopardy in the foreseeable future) in Arizona.

WATER SUPPLY -- PRESENT AND PROJECTED NEEDS

The Colorado River Compact of 1922 divided the water between the upper and lower basins with the division point at Lee Ferry, in northern Arizona near the Utah border. The Compact also divided the states into an upper division, consisting of the states of Colorado, New Mexico, Utah, and Wyoming, and a lower division, consisting of the states of Arizona, California, and Nevada. Each basin was apportioned the right to beneficial consumptive use of 7.5 million acre-feet (MAF) per year from the Colorado River System. In addition, the lower basin was given the right to increase its use by 1 MAF per year. The Compact states that any required delivery of water to Mexico shall be supplied first from water surplus to the foregoing apportionments (a total of 16.0 MAF a year) and that, if the surplus is insufficient, the burden of the deficiency shall be borne equally by the upper and lower basins. provides that the states of the upper division will not cause the flow at Lee Ferry to be depleted below 75 MAF for any period of 10 consecutive years.

In the Mexican Water Treaty of 1944, the United States agreed to deliver to Mexico a guaranteed 1.5 MAF annually from the Colorado River, with an additional 0.2 MAF per year to be delivered when there exists a surplus, as determined by the United States. In the event of extraordinary drought, Mexico's allotment is to be reduced in the same proportion that consumptive uses in the United States are reduced.

In addition to the Compact and the Treaty, apportionments of water in the Colorado River Basin are subject to many other documents, such as water supply contracts, Federal laws, and decrees of the U.S. Supreme Court.

At present, the Colorado River Basin has more than sufficient water to meet consumptive needs. Table 2 summarizes water uses for 1975. With present levels of use about 13 MAF from the main stream and an average annual flow above Hoover Dam of about 15 MAF, water storage should continue to accumulate in the system's reservoirs over the next decade. However, if future needs increase as projected, periodic shortages could occur in the future during periods following years of abnormally low runoff. The first water deliveries to the Central Arizona Project are projected for 1985, and the project should be capable of diverting a full water supply in 1986. Upper basin development is predicted to consume the remaining supply of Colorado River water by about the year 2040.

HYDROPOWER

Southern California Edison and Los Angeles Department of Water and Power operate the Hoover Dam power plant for the United States. Power is supplied to allottees in Arizona, California, and Nevada. The present name plate capacity is 1,340 megawatts but, because of the limited amount of water available, the Hoover power plant normally

operates at 32-percent capacity. In the future, the demand for Hoover energy is certain to increase. The population growth rate in cities in the Southwest is one of the fastest in the nation. Arizona and Nevada rank first and third, respectively, in the rate of population growth in the contiguous United States. Utility companies serving these areas must find additional sources to meet the electrical energy needs of this increasing population. The entities that utilize power from the Hoover power plant have indicated that they can use any and all additional energy that the plant can produce. Also, as supplies of nonrenewable fossil fuels decrease, the value of Hoover energy will increase.

WATER QUALITY

No large metropolitan centers are located along the Colorado River; therefore, the waters of the river show little degradation normally related to domestic, municipal, and industrial wastes. The mineral burden of the Colorado River is the foremost water quality problem in the basin. Waters of highly variable salt concentrations are introduced into the river in all reaches from various sources, and concentrations have increased with continuing development along the river until 1970. Since 1970 the quality of the water arriving at Imperial Dam has improved over the water that arrived before 1970. Improvement is expected to continue for the next several years for the following reasons:

- Water supply presently exceeds demands because of delayed completion of projects currently under construction and delayed completion dates on authorized projects.
- 2. In the river reach between Parker Dam and Imperial Dam, as indicated by U.S. Geological Survey recorded data, irrigation diversions from 1974 through 1980 did not exceed 10 acre-feet per acre in the Parker Valley area; and return flows did not exceed 5.5 acre-feet per acre and averaged only 4.2 acre-feet per acre. In the 16-year period 1958 to 1973, return flows averaged 7.3 acre-feet per acre and exceeded 5.5 acre-feet per acre in each year. during this same period varied from over 10 to just under 16 acre-feet per acre. This is indicative of a reduction in the total salt returning to the river above Imperial Dam as well as a reduction in diversions from the river, thereby increasing the volume of better-quality water remaining in the river in the 7-year period 1974 to 1980.
- 3. The large volume of water in storage reservoirs since Lake Powell has filled tends to dampen the variations in total dissolved solids (TDS) concentrations during each year.

A further reduction in concentration of TDS at Imperial Dam could occur each time the reservoir system nears filling, causing surplus waters to be released into the river.

The records for 1971 to 1979 show that the concentration of TDS of the Colorado River at its headwaters was only 50 milligrams per liter (mg/l); the TDS at Imperial Dam increased to about 825 mg/l; and the TDS at the Mexican border was about 938 mg/l. Salinity concentrations for any 1 year, or part of a year, could have higher or lower values; and in some cases, the TDS at the Mexican border could be lower than that at Imperial Dam. This latter phenomenon occurs when high floodflows of better quality water (lower TDS) are contributed to the Colorado River by the larger downstream tributaries, such as the Gila River. concentrations in any waters are increased by two means -- an increase in the total salts in solution or a reduction in the solvent (in this case water). Usually salts in solution are increased by the pickup of salts from soils and any overlying or underlying strata as the water travels through or across these media. TDS concentrations, without the addition of salts, can occur as the result of the loss of water by evaporation, transpiration, and physical diversion. Studies indicate that about half of the TDS increase at Hoover Dam is caused by naturally occurring phenomena and the balance by man-induced activities. Major sources of increases in total dissolved solids in the waters of the Colorado River, listed in decreasing order of effect are: natural sources, irrigation, reservoir evaporation, out-of-basin export of water, and return from municipal and industrial uses.

Although the short-term trend of salinity concentration is currently downward, it is expected that the long-term trend will show increases in concentrations as Colorado River depletions increase. The passage of the Colorado River Basin Salinity Control Act (Public Law 93-320) authorized the Bureau of Reclamation to implement measures to control increases in salinity concentrations of the Colorado River System. These measures include:

- Point source control.
- Irrigation source control.
- Diffuse source control.

Point source control involves attempts to reduce accumulations to the Colorado River System of the natural occurring point sources of highly saline runoff at diverse locations throughout the basin. Identified point sources are: La Verkin Springs near Hurricane, Utah; Blue Springs near the confluence of the Little Colorado River and Colorado River; and the Lower Virgin River from its entrance to the Narrows above the Arizona-Utah State line to Lake Mead, near Las Vegas, Nevada. Irrigation source control involves attempts to reduce the diversions of excess water associated with the application of water to meet consumptive use requirements of irrigated lands and to reduce and/or control the timing of the occurrence of return flows from these lands. Identified irrigation areas that may be amenable to such controls are the Palo Verde Irrigation District and the Colorado River Indian

Reservation unit, among others. These measures would involve various attempts to control salinity concentrations at those levels suitable for the many and varied uses of the waters within the Colorado River Basin. This could include efforts in evaporation rate reduction. Status reports on La Verkin Springs and the Palo Verde Irrigation District were released in December 1979 and March 1980, respectively. A concluding report was issued in October 1979 on the Colorado River Indian Reservation unit.

Although increases in TDS levels are expected to have little adverse effect on instream uses such as recreation, hydroelectric power generation, and propagation of aquatic life, increased TDS concentration has and will cause economic losses in agricultural, municipal, and industrial operations. Agricultural losses arise from decreased crop yields, increased leaching requirements, increased management costs, and application of adaptive practices, such as crop patterns, improved drainage systems, and plantings on sloped beds. In municipal and industrial (M&I) operations, losses would result from increased water treatment costs, accelerated pipe corrosion and appliance wear, and increased use of soap and detergents. The Bureau of Reclamation has estimated damages resulting from projected increases in TDS levels in Colorado River water. The following tabulation (supplied by the Bureau of Reclamation) shows these annual damages at 10-year intervals in terms of 1980 dollars:

		Salinity	Total direct
Year	(TDS in mg/1)	damages	Total damages
1980	*875	\$126,137,750	\$140,836,750
1990	1055	189,391,190	225,256,700
2000	1141	219,614,278	265,592,758
2010	1161	226,640,438	272,970,683

*Although 875 mg/1 does not reflect the actual 1980 salinity at Imperial Dam, this is the salinity expected, had average water supply conditions existed during this period.

These estimates were separately based on nondamaging or desired TDS levels of 500 mg/l for municipal and industrial water supplies and 750 mgl/l for agricultural water supplies.

RECREATION

Millions of users of recreation indulge in a myriad of activities along the Colorado River each year. The river and its manmade lakes support water-based sports, such as swimming, boating, water skiing, sailing, fishing, and scuba diving. Other activities include camping, picnicking, hiking, motorcycling, off-road vehicle driving, and visits to points of interest, such as Indian petroglyphs. The Lower Colorado River recreational facilities attract visitors from as far away as Phoenix, Arizona, and the south coastal area of California. An annual winter influx of mobile retirees constitutes another large group of recreationists on the river.

Table 2. Summary of Colorado River System consumptive uses and losses by states, basins, and tributaries in 1975.

(1,000 Acre-feet)

	Main	stream		
State	Upper	Lower	Tributaries	Total
	basin	basin	(*)	(*)
Arizona	25	1,208	4,281	5,514
California	-	4,937	-	4,937
Colorado	1,778	-	-	1,778
Nevada	-	68	86	154
New Mexico	290	-	32	322
Utah	615	-	83	698
Wyoming	291			291
Subtotal	2,999	6,213	4,482	13,694
Main stream reservoir				
evaporation	607	1,158	-	1,765
Channel losses		322	_=	322
Total in United States	3,606	7,693	4,482	15,78
water passing to Mexico		1,656		1,656
TOTALS	3,606	9,349	4,482	17,437

- Notes: a. Source of data was "Colorado River System Consumptive Uses and Losses Report 1971-1975," by the Bureau of Reclamation.
 - b. Total mainstream uses (upper plus lower basin) equal 12,955,000 acre-feet in 1975.

*Onsite consumptive uses and losses, includes water uses satisfied by groundwater overdraft.

Despite its already high level of use, the Lower Colorado River is still capable of supporting further recreational development and use, and recreational development can be expected to continue to grow. The economic contribution of the recreation industry is already important to the local economy along the river. This importance will grow proportionately with further exploitation of recreational opportunities.

Unfortunately, the existing recreational development along the river has been constructed in such a manner that not all of it is safe from large sustained flood releases from Hoover Dam. In the absence of more stringent controls on future development, the potential for flood damages to recreational development can be expected to increase.

COLORADO RIVER FLOODFLOWS IN MEXICO

The economic and social impacts of Colorado River floodflows in Mexico are considerable. The lack of floodflows in the Lower Colorado River in recent decades has led to utilizing the flood plain primarily for agriculture. Mexico, with approximately 500,000 acres of land under irrigation in the Mexicali Valley, has a big stake in preventing damage from the Colorado River floodflows.

Upon notification through the International Boundary and Water Commission that the filling of upstream reservoirs would cause a return to higher flows in the Lower Colorado River, the Mexican Government set about determining the extent of potential flooding in its territory and formulating plans to mitigate potential damages. On the basis of its findings, Mexico undertook a comprehensive flood protection program that included raising levees, removing channel constrictions, and building new levees and pump systems along the lower river. Further, a number of communities that had been near the river without protective works had to be relocated. According to Mexican authorities, the estimated cost of the flood protection improvements well exceeded \$35 million.

Mexico's plans call for, and its levee system is being improved to provide, protection for essentially all the irrigated lands and communities in the Mexicali Valley against a river discharge of 28,000 ft³/s. By September 1980, the works were largely complete. The plans also call for riprap protection of the levees in the threatened reaches, with this work performed early in 1981. Since a discharge of 28,000 ft³/s has a return period of 140 years under the current operating plan, Mexico will have provided a high degree of protection to its developments in the Mexicali Valley with completion of the improvements. The only area not protected will be on the river side of the levees and the marginally developed lands near the mouth of the river that could not feasibly be protected.

Significantly, there appears to be little threat of flooding to Imperial Valley in California as a result of high floodflows on the Colorado River. Although flooding has occurred historically (most recently, from 1904 to 1907, during which time the present Salton Sea was created), combined factors make its recurrence unlikely: (1) The upstream section of the existing levees (the Ockerson levee) can handle 70,000 ft³/s with freeboard down past a critical point on the Colorado River Delta at which point floodflows, if they were to break out, would pass southward into the Gulf of California rather than turn westward and northward into Imperial Valley; (2) Mexico's extensive irrigation network, consisting of canals with banks that are normally superelevated, affords considerable obstruction to floodflows moving westward; and (3) through the operation of upstream reservoirs, a high degree of control of runoff exists that would permit floodfighting efforts to maintain control of the river against any westward diversion.

It is essential that the International Boundary and Water Commission continue its role of effecting close coordination between U.S. agencies responsible for upstream reservoir operation and the Mexican agencies responsible for the flood protective works in the Mexicali Valley before and during periods of high flows on the Lower Colorado River.

FORMULATION OF ALTERNATIVE PLANS

This section states the objectives of plan formulation, defines the criteria by which the alternative plans were formulated, describes the plans considered, and establishes evaluation criteria.

PLANNING OBJECTIVES

The primary purpose of the study leading to this report is to establish the best flood control operation plan for Hoover Dam. To this end, the following six water resource planning objectives were initially considered for plan formulation:

- 1. Flood damage reduction.
- 2. Water conservation.
- 3. Hydropower production.
- 4. Recreation.
- 5. Wildlife enhancement.
- 6. Water quality improvement.

In the early stages of plan formulation, the first three planning objectives (flood damage reduction, water conservation, and hydropower production) emerged as predominant because a reservoir-related flood control plan deals primarily with abnormally large flows and with storage volume. The latter three objectives (recreation, wildlife enhancement, and water quality improvement) are primarily functions of normal flow produced by day-to-day non-flood operations; therefore, this limited the formulation of alternatives to the first three objectives. The impacts of the alternatives on the latter three objectives, however, were considered in the evaluation of the alternatives.

Since the construction of Hoover Dam, the institutionalization of the Colorado River has grown steadily. Use of its water is now governed by a treaty with Mexico, two interstate compacts, water laws of seven states, numerous Federal statutes, court decrees, and water and power contracts. Some of the more important documents affecting the use of Colorado River waters are:

- Colorado River Compact November 24, 1922.
- Boulder Canyon Project Act December 21, 1928.
- Seven-Party Water Agreement August 18, 1931.
- Boulder Canyon Project Water Contracts April 24, 1930, through the present.
- Boulder Canyon Project Power Contracts May 29, 1941, through the present.
- Boulder Canyon Project Adjustment Act July 19, 1940.

- Mexican Water Treaty February 3, 1944.
- Upper Colorado River Basin Compact October 11, 1948.
- Colorado River Storage Project Act April 11, 1956.
- General Principles to Govern, and Operating Criteria, for Glen Canyon Reservoir and Lake Mead During the Lake Powell Filling Period - April 2, 1962.
- Colorado River Storage project, General Power Marketing Criteria - 1962.
- Supreme Court Decree in Arizona v. California March 9, 1964.
- Lake Mead Flood Control Regulations July 29, 1968.
- Colorado River Basin Project Act (Public Law 90-537, 90th Congress, approved September 30, 1968).
- Criteria for Coordinated Long-Range Operation of Colorado River Reservoirs - June 10, 1970.
 State Water Laws.
- Contracts for sale of water from Colorado River Storage Project Reservoirs.
- Federal Water Pollution Control Act Amendments 1972.
- Minute 242, Mexican Water Treaty August 30, 1973.
- Colorado River Basin Salinity Control Act 1974.

The degree of legal control exercised on the Colorado River serves to illustrate the economic importance of its water supply to an arid region and its energy-producing ability in an era of growing energy shortage. The importance of water supply and power required that the formulation of an array of flood control operation plans should be broad enough to achieve as full an exploitation of these assets as possible. To this end, alternative operation plans were formulated that, in turn, favored flood control, water supply, and power production.

PLANNING PERIOD

The period of most concern in this study is from the present until the Central Arizona Project (CAP) goes into operation, scheduled for CAP will divert water from Lake Havasu for consumptive use in Arizona. Expectations are that the amount of water diverted by CAP will be sufficient to largely eliminate surplus water in the Colorado River system, thereby reducing the probability of flood control releases from Hoover Dam and of damaging flows below the dam. Because CAP is expected to have a large impact on the flood control operation of Hoover Dam, the assumption has been made that the plan formulated in this study and report will be valid only until CAP becomes fully operational (about 1986). At that time the flood control operation will be reviewed again, and if necessary, a new plan will be formulated based on revised flood frequency projections. To allow for possible delays in fully completing all elements of CAP and to facilitate application of established computer models, a planning period of 10 years--from 1979 to 1989--was used for comparing theoretical damages and benefits under the various alternatives.

HOOVER DAM FLOOD CONTROL OPERATION

The Boulder Canyon Project Act of 1928 is the authorizing legislation for the construction of Hoover Dam. Section 6 of the act establishes flood control as one of the top priority purposes for the project as follows:

Sec. 6. That dam and reservoir provided for by section 1 hereof shall be used: First, for river regulation, improvement of navigation, and flood control; second, for irrigation and domestic uses and satisfaction of present perfected rights in pursuance of Article VIII of said Colorado River Compact; and third, for power * * .

The function of Lake Mead and Hoover Dam in the control of floods is to capture and store enough flood volume so that flows downstream can be reduced to less-damaging, or even beneficial, size. To obtain the desired storage, a certain amount of storage space must be provided in Lake Mead (or upstream reservoirs) prior to each flood season. The effect of Hoover Dam on a particular flood is a function of the storage available at the time of the flood and the reservoir release pattern followed during the flood.

The flood control plan put forth in the "Report on Reservoir Regulation for Flood-Control Storage at Hoover Dam and Lake Mead," dated November 1968, is the basis for the development of alternative operating plans evaluated in this report. Hence, this section describes the 1968 plan, and subsequent sections explain the development of the alternative plans.

There are two different and distinct annual flood seasons on the Lower Colorado River: the late summer/early fall rainflood season and spring/summer snowmelt season. Any flood control operation plan for Hoover Dam must control both types of floods.

Summer/fall rainfloods normally have much smaller volume than snowmelt floods, but they can achieve quite large peaks. studies have shown that, with 1.5 MAF of storage space available in Lake Mead, the standard project rainflood can be controlled to a maximum outflow of about 29,000 ft³/s from Hoover Dam. The maximum inflow to Lake Mead during this flood would be about 120,000 ft 3 /s. A standard project flood is defined as the flood resulting from the most severe combination of meteorological and hydrological conditions reasonably characteristic of the basin. The 1968 operation plan requires a minimum of 1.5 MAF to be provided in Lake Mead during the period 1 August through 1 October each year for control of summer/fall rainfloods. About 1.2 MAF of the required 1.5 MAF is actually surcharge storage above the top of the raised spillway gates. The 1.5 MAF, including surcharge, is the least allowable storage space in Lake Mead, except during actual flood operations. By controlling the standard project rainflood to a nearly nondamaging release from Hoover Dam, the 1.5 MAF requirement affords a high degree of protection but requires only a

small amount of dedicated Lake Mead storage space. Consequently, the 1.5 MAF requirement for 1 August was incorporated into all alternative plans considered in this report.

Controlling the typically large-volume snowmelt floods on the Colorado River requires much more storage space than controlling rainfloods. The annual virgin runoff from the drainage basin above Lake Mead is nearly 15 MAF, about 70 percent of which occurs during the spring and summer snowmelt season. The proper control of such large floods requires a judicious choice of available storage space and operating strategy so that benefits from the project may be realized to the fullest possible extent.

The 1968 operating plan requires releases from Lake Mead to be scheduled so that available space for flood control storage will not be less than indicated in the following tabulation for the dates shown.

<u>Date</u>	Available flood control storage space (acre-feet)
1 August	1,500,000
1 September	1,500,000
1 October	1,500,000
1 November	2,675,000
1 December	3,963,000
1 January	5,350,000

The available flood control storage space in Lake Mead on 1 November, 1 December, and 1 January could be reduced to a minimum of 1,500,000 acre-feet, provided the additional space prescribed in the above tabulation is available in active storage space in upstream reservoirs. The available storage space including surcharge storage is used to control releases to no greater than 40,000 ft³/s insofar as possible.

The remainder of the 1968 flood control operation plan focuses on the control of forecasted reservoir inflow during the 1 January to 1 August snowmelt runoff period. The monthly runoff forecasts are maximum forecasts for any specified runoff period and are defined as the estimated volume (acre-feet) that, on the average, will not be exceeded 19 times out of 20. For the snowmelt runoff period from 1 January to 1 August, reservoir releases are based on (1) filling Lake Mead to the point where only 1,500,000 acre-feet of available storage remains on 1 August and (2) maintaining releases during that period to 40,000 ft 3/s or less, insofar as possible.

This discussion summarizes the key elements of the 1968 flood control operation plan as stated in the "Report on Reservoir Regulation for Flood-Control Storage at Hoover Dam and Lake Mead," dated November 1968.

FORMULATION CRITERIA AND ALTERNATIVE PLANS

Flood control storage behind Hoover Dam is only one of several ways of preventing flood damage along the lower Colorado River. Other methods might include channelization, levee construction, rights-of-way purchase, and land-use controls. The Bureau of Reclamation, through the Colorado River Front Work and Levee System along with Federal, State, and local regulations governing the use of flood plains, has already addressed these structural and nonstructural approaches.

Since the purpose and authority for this study relates specifically to the flood control operation of Hoover Dam and the alternative flood control methods are encompassed within other authorities, the formulation of alternative flood control plans was limited to the operation of Hoover Dam.

Of the wide range of possible combinations of storage space allocated to flood control and release strategy, nine were selected for evaluation. Each of these alternatives was formulated to favor, in turn, flood control, water conservation, and power generation.

As a starting point, a modified version of the 1968 flood control operation plan was designated alternative 1, and then used as a basis for comparing the other alternatives. The 1968 operating plan was not directly included as an alternative because knowledge of present damages and benefits of Hoover releases made adoption of certain changes to this flood control operation beneficial to any alternative. The 1968 plan was modified to limit space-building releases to a non-damaging level of 28,000 ft $^{3}/s$. This limit was imposed because a realistic operation would not permit damaging releases during a preparatory space-building period when no demonstrable flood threat exists. Also, the 1968 plan for controlling spring/summer snowmelt floods requires Lake Mead to be drawn down beginning 1 October so that 5.35 MAF storage space is available for flood control by 1 January. To help insure that 1 January storage space could be reached with a limit on space-building releases of 28,000 ft $^3/s$, the 1968 plan was modified to begin drawdown by 1 August, thereby extending the drawdown period by 2 months.

An additional significant difference between the 1968 operation plan and alternative 1 is in the manner releases are stepped up (increased) to control floods. Under the 1968 plan, the only objective was to control floods to 40,000 ft³/s insofar as possible. Consideration of potential flood damages, water conservation benefits, and hydropower benefits occurring at lower releases made it necessary to incorporate five release steps into the operation. The five release steps are 19,000; 28,000; 35,000; 40,000; and 73,000 ft³/s. Considering the forecasted inflow, releases during the period 1 January to 1 August are based on filling all available Lake Mead storage on 1 August, except for 1,500,000 acre-feet, while maintaining the lowest level (release step) of outflow. Stated differently, the average release in any month from 1 January to 1 August is determined by solving the following equation:

Volume of water released in the current month

- + volume of water to be released at the lowest appropriate step for the remaining months through 1 August
- + available storage space to top of flood control pool
- 1,500,000 acre-feet must
- = the forecasted inflow volume through 1 August.

Should water-use requirements be greater in the current month than the required flood control release, releases would be made to satisfy water-use requirements. The release-selection process is repeated each month to reflect a revised forecast and available storage space. As in the 1968 plan, the monthly runoff forecasts are maximum forecasts for the remainder of the runoff period and are defined as the estimated volume (acre-feet) that, on the average, will not be exceeded 19 times out of 20.

The step releases used in alternative 1 are based on the following considerations. The lowest step, 19,000 ft 3 /s, is based on the power plant capacity of Parker Dam. Releases in excess of 19,000 ft 3 /s for periods beyond the limited modulating capacity of Lake Mohave and Lake Havasu would waste energy by bypassing the Parker power plant. The next step, 28,000 ft 3 /s, is the approximate maximum release at Hoover Dam that will not cause damage through Parker Strip. Also, the power-plant capacity at Davis Dam is 28,000 ft 3 /s. The power plant capacity at Hoover Dam is approximately 35,000 ft 3 /s, which establishes the third step. At the time Hoover Dam was completed, 40,000 ft 3 /s was the approximate maximum nondamaging flow downstream from the dam, and the dam was designed to operate to not exceed this release, if at all possible. Releases of 40,000 ft 3 /s and greater are necessary to control large floods. The fifth and last step in the series, 73,000 ft 3 /s, is the approximate maximum controlled release from the outlet works at Hoover Dam.

With the modified 1968 operating plan established as alternative 1, the next step in plan formulation was to develop a broad array of alternatives combining various storage space requirements with various operating strategies and to include in the array those alternatives that would, in turn, favor flood control, water conservation, and power generation. The 1 August 1.5 MAF storage space requirement, the extension of the space-building period to August through December, the 28,000 ft 3 /s upper limit on space-building releases, and the variations of the five-step release strategy used in alternative 1 were all incorporated into all alternatives.

Two alternatives (2 and 4) were formulated to stress two different approaches to flood control. Alternative 2 was formulated by determining the storage space required on 1 January each year that would have produced the smallest maximum monthly peak outflow from Hoover Dam through the 72-year period of record. The calculation resulted in a plan having 5.67 MAF of storage space, which would have controlled floods experienced through the period of the historical record with a maximum 1-month outflow of 33,600 ft³/s. Either more or less than 5.67 MAF of 1 January storage space would have resulted in releases greater than 33,600 ft³/s for at least 1 month during the 72-year With less than 5.67 MAF of 1 January storage, spring flood releases greater than 33,600 ft³/s are necessary. Similarly, with more than 5.67 MAF of 1 January storage, fall space building releases greater than 33,600 ft 3 /s are required. It is significant that 33,600 ft 3 /s is the minimum required release to control the historical record regardless of the choice of 1 January available storage requirement. The same step release operating strategy that was used for alternative 1 was used for alternative 2.

The flood control concept behind the formulation of alternative 4 was to not make releases in excess of the estimated nondamaging release. This alternative calls for 5.35 MAF of storage space on 1 January, the same as alternative 1, but it has only two release steps, 19,000 and 28,000 ft 3 /s. Floods that could not be controlled with the maximum 28,000 ft 3 /s release would flow over the spillway.

The maximization of water conservation in Lake Mead requires that releases from Hoover Dam be limited to consumptive needs to the extent possible. Intuitively, the most effective way to eliminate releases in excess of needs is to reduce the amount of storage space required for flood control at the beginning of each flood season. calculations showed this assumption to be invalid.) In an attempt to formulate alternative plans favoring water conservation, minimum reasonable storage space requirements for flood control were determined. Because 1.5 MAF in Lake Mead will control the summer rainflood to a near nondamaging release, this amount of space was selected as a starting point. The operating criteria for Glen Canyon Dam require no flood control space in Lake Powell at any time. However, the long-range operating strategy for power production at Glen Canyon Dam requires that spills be avoided; and in order to avoid spills at Glen Canyon Dam, some evacuation of Lake Powell would be required prior to the spring flood season. Estimates by the Bureau of Reclamation indicate that at least 3.0 MAF of storage space would be available in the upper basin reservoirs each spring. For the formulation of plans favoring water conservation, the minimum January storage-space requirement was taken as 4.5 MAF, the sum of the 1.5 MAF required in Lake Mead to control the summer rainflood, and the 3.0 MAF probably available each spring in Lake Powell.

It is recognized that it could be possible that the flood control alternatives investigated might necessitate release from Lake Powell in order to equalize storage on September 30, but such would occur only under very unlikely circumstances. Prior to August 1, Lake Powell and all other Upper Basin reservoirs would have had to have filled to capacity, and Lake Mead would have had to have filled except for 1.5 million acre-feet (MAF) of required flood control space. Even so, there would still be no possible effect on Lake Powell's operation due to space building requirements unless its contents exceed 24.669 MAF during September. This remaining conservation space in Lake Powell would amount to 0.333 MAF at that level of storage. Typical operation of Lake Powell during the months of August and September would probably preclude the possibility of the reservoir being that full by the end of September, even if the runoff from previous months had filled it to capacity before August 1. Scheduled releases from Lake Powell for power generation during August and September under these conditions would probably exceed normal inflow by an amount greater than the maximum of 0.333 MAF which could be forced out by the Long-Range Operating Criteria provision to equalize storage in Lakes Powell and Mead. It is also likely that operation of Flaming Gorge, Blue Mesa, and Navajo reservoirs during these 2 months would create additiona' creditable flood control space. This would further diminish the likelihood of a storage split being forced by space building releases from Lake Mead.

Alternatives 3, 6, and 7 were formulated to favor water conservation. The effect of different operating strategies was tested by varying the release steps in these three plans. Release steps of 19,000; 28,000; 35,000; 45,000; and 73,000 ft 3 /s were used with alternative 3. Steps of 19,000; 28,000; and 40,000 ft 3 /s were used in alternative 6. Alternative 7 has release steps of 19,000; 28,000; 35,000; 40,000; and 50,000 ft 3 /s.

The maximization of hydropower generation requires that releases in excess of power-plant capacity be avoided insofar as possible. Alternative 5 was formulated with a maximum controlled release of 35,000 ft 3 /s, maximum power-plant capacity at Hoover Dam. Rare floods requiring releases greater than 35,000 ft 3 /s would overflow the spillway under the operation defined by alternative 5. The plan includes a 1 January storage of 5.35 MAF. Alternative 8 calls for a large 1 January storage of 7.5 MAF for the purpose of minimizing any bypassing of power plants.

To further test the effect of different release strategies, alternatives 5 and 9 were added. These alternatives require 5.35 MAF of storage space on 1 January as do alternatives 1 and 4; however, they differ in release strategies. Alternative 5 calls for release steps of 19,000; 28,000; and 35,000 ft 3 /s. Alternative 9 includes release steps of 19,000; 28,000; 35,000; 50,000; and 73,000 ft 3 /s. Table 3 summarizes the alternative plans with their storage requirements, release steps, and other information.

Table 3. Alternative plans.

Alternative	1 January storage (MAF)	Maximum controlled release	Formulated to favor	Release steps (1,000 ft ³ /s)
1	5.35	73,000	Bal.	19, 28, 35, 40, 73
2	5.67	73,000	FC	19, 28, 35, 40, 73
3	4.50	73,000	WC	19, 22, 35, 45, 73
4	5 • 35	28,000	FC	19, 28
5	5.35	35,000	P	19, 28, 35
6	4.50	40,000	WC	19, 28, 35, 40
7	4.50	50,000	WC	19, 28, 35, 40, 50
8	7.50	73,000	P	19, 28, 35, 40, 73
9	5.35	73,000	FC & P	19, 28, 35, 50, 73

Notes:

- 1. All alternatives require 1.5 MAF storage space on 1 August.
- 2. Space-building operations begin on 1 August for all alternatives.
- 3. Bal. denotes balanced; FC, flood control; WC, water conservation; P, power.
- 4. Results of analysis may not agree with the formulation objective.

EVALUATION CRITERIA

The Water Resources Council's (WRC) Principles and Standards for Planning Water and Related Land Resources require that Federal actions relating to water resources be evaluated for their effects on national economic development, environmental quality, social well-being, and regional development. The alternatives studied in this report were all evaluated for the WRC criteria and their impacts are discussed under the heading "Assessment and Evaluation of Alternatives."

Specific contributions to national economic development for this study might include benefits from reduction in flood damages, increased water conservation, increased hydropower generation, improved water quality, and increased recreational opportunities. Impacts of the various alternatives on environmental quality could include changes in water quality (particularly, changes in salinity), and positive and regative effects of changes in frequency of flooding on wildlife and wildlife habitat. Effects on regional development are local economic effects that generally parallel the effects on national economic Effects on social well-being include such intangible development. impacts as reduction in the threat of personal financial losses or Reduction in flood damages or the threat of flood physical harm. damages can improve social well-being in a community by reducing the amount of local resources required for flood fighting and recovery from flood damages. The resources thus conserved can then be used to provide positive contributions to quality of life in the community. addition, consideration was given to the effects of flood discharges along the Mexican portion of the river.

To facilitate a fair and equitable comparison of alternative plans, a common basis for comparison is needed. Normally, in the case of a project requiring new construction, project alternatives are compared to a "without project" condition. For this study, the basis used for comparing alternative plans was alternative 1, a modified version of the 1968 flood control operation plan.

ASSESSMENT AND EVALUATION OF ALTERNATIVES

This section identifies, describes, and where possible, quantifies the predicted impacts of the alternative plans.

PREDICTED IMPACTS

All plans were compared against alternative 1, a modified version of the current operation plan. The basis for selecting alternative 1 for comparison was that it retained the same 1 January and 1 August flood control storage space requirements as the 1968 flood control plan. Understanding the differences among the alternatives can be enhanced by realizing that the only operational differences are the timing and size of Hoover Dam flood control releases, and the differences in releases are caused by variations in one or both of two operational criteria: (1) requirement of 1 January flood control storage space, and (2) step release pattern. Table 4 lists the operational criteria in which the alternative plans differ, and also gives the economic impacts of the alternatives in absolute value terms. Table 5 compares the relative impacts of alternatives 2 through 9 with those of alternative 1. None of the alternatives requires capital investment.

The following paragraphs point out the more salient differences of the plans. Unless otherwise stated, all costs and benefits are equivalent annual values. The basis for the dollar valuations of each economic category is described in appendix C. Estimates of plan benefits and damages were based on July 1978 price levels.

Alternative 2

The only operational difference between this plan and alternative 1 is an increase in the storage space required on 1 January from 5.35 to 5.67 MAF. The largest economic impact of the increased storage space requirement would be in water conservation. After 10 years of operation under alternative 2, Lake Mead would contain 43,000 acre-feet less water in storage than it would under alternative 1. (See table 4.) average annual reduction in the value of stored water would be \$93,000 (table 5). About two-thirds of the loss would be offset by increased diversions to Los Angeles Metropolitan Water District (MWD) during the 10-year period. The net average annual loss in water conservation would \$33,000. There would be a net increase in hydropower generated of 2 million kilowatt hours (mkwh) having a value of \$60,000 annually. Plan 2 would result in a small improvement in flood control, \$13,000 average annual, and no increase in salinity. Operation and maintenance costs would be \$7,000 a year higher under alternative 2 than under alternative 1. Alternative 2 is estimated to produce average annual net benefits of \$33,000 in excess of alternative 1.

Alternative 3

The required 1 January storage space for this plan was reduced to 4.50 MAF, an amount that approaches a practical minimum, in an attempt to maximize the amount of water stored in Lake Mead each year. Plan 3 also incorporates a change in release steps by replacing the 40,000 ft 3 /s step with a 45,000-ft 3 /s step. The reduced 1 January storage space would result in an increase in the amount of water stored in Lake Mead at the end of the planning period. However, net water conservation benefits would decrease substantially (\$108,000 per year) under this plan because of a decrease in MWD diversions. There would be a net reduction in hydropower generation of 2 mkwh having a value of \$60,000 annually. Flood damages would decrease about 12 percent, about \$19,000 on an average annual basis, compared with plan 1. The plan would cause no increase in salinity, and operation and maintenance costs would average about \$7,000 a year higher than for alternative 1. Average annual net benefits would be \$156,000 smaller than alternative 1.

And the state of t

Alternative 4

This plan would have the same storage space requirements as alternative 1, but controlled releases would be limited to 28,000 ft³/s. The purpose of the plan is to demonstrate the effects of operating with controlled releases limited to the estimated nondamaging release or less. Floods too great to be controlled with a maximum 28,000 ft³/s release would cause spillway overflow. Except for water in storage at the end of the planning period, which would be the same as for alternative 1, alternative 4 would perform more poorly in all economic outputs. The plan would be particularly poor in flood control—the motivation responsible for the plan. Flood damages under alternative 4 would be about 2.1 times the flood damages under alternative 1. Net average annual economic benefits from all sources would be \$626,000 less under alternative 4 than under alternative 1.

Alternative 5

The purpose of this plan is to demonstrate the effects of limiting controlled Hoover Dam releases to Hoover power-plant capacity. The plan calls for the same storage-space requirements as alternative 1, but the maximum controlled release would be limited to $35,000 \, \mathrm{ft^3/s}$. The plan is the same as alternative 4 except for the addition of the $35,000 \, \mathrm{ft^3/s}$ release step. The economic impacts of alternative 5 would be much better than alternative 4, but they would not be as good as alternative 1 in three respects: (1) Water in storage at the end of 10 years of operation would be $26,000 \, \mathrm{acre-feet}$ less than under alternative 1; (2) flood damages during the period would be about \$39,000 higher on an average annual basis; and (3) operation and maintenance costs would average about \$16,000 a year more. Salinity costs, hydropower, and MWD diversions would be the same under alternatives 1 and 5. Average annual net benefits would be \$111,000 less than alternative 1.

The same			
Item	1	2	
		Plan description	j
1. January 1 storage (MAF)	5.35	5.67	
2. Max. controlled release (1,000 ft 3/s)	73	73	
 Max. controlled release 3(1,000 ft³/s)	19,28,35,	19,28,35,	19
***	40,73	40,73	
	Avera	ge annual economic	valu
Hydropower (mkwh) (\$0.03 per kwh)	12,252	12,254	
Water (1,000 a-f)		•	- 1
Lake Mead ending storage* (\$30/a-f)	20,213	20,170	- 1
MWD diversions (\$30/a-f)	921	923	- 1
Flood damages (\$1,000)	150	137	
Salinity (p/m) (\$293,400 per p/m)	715	715	1
Operation and maintenance (\$1,000)	2,194	2,201	1
Note: mkwh = million kilowatt hours; a-f = acre-feet; and	l p/m = part	s per million.	
*Ending values for period of record analysis rather that			

Item	1	2	
		Plan descriptio	n
 January 1 storage (MAF)	5.35	5.67	
2. Max. controlled release (1,000 ft ³ /s)	73	73	
3. Release steps (1,000 ft ³ /s)	19,28,35,	19,28,35,	1
	40,73	40,73	
	Relative	economic impacts	(equ
Hydropower	-	60	
Water			
Lake Mead ending storage	-	-93	1
NWD diversions	-	60	
Flood damages	-	13	1
Salinity	-	0	- 1
Operation and maintenance	-	- 7	I
Relative net benefits	-	33	1
Note: The values given in this table represent the relativ	e difference	e from alternative	1.
benefits afforded by the plan.			1

Table 4. Economic comparison of alternative plans.

Alternative									
2	3	4	5	6	7	8	9		
an description									
5.67	4.50	5.35	5.35	4.50	4.50	7.50	5.35		
73	73	28	35	40	50	73	73		
19,28,35,	19,28,35,	19,28	19,28,	19,28,	19,28,35,	19,28,35,	19,28,35,		
40,73	45,73	35	35,40	40,50	40,73	50,73			
nnual economic	values for each	ch Alternative	<u> </u>						
12,254	12,250	12,248	12,252	12,250	12,250	12,254	12,252		
20,170	20,218	20,213	20,187	20,218	20,218	19,702	20,213		
923	917	920	921	917	917	921	921		
137	131	321	189	165	142	111	136		
715	715	716	715	715	715	714	715		
2,201	2,201	2,206	2,210	2,208	2,208	2,211	2,210		

1 values.

Table 5. Economic comparison of alternative plans with Plan l.

Alternative								
2	3	4	5	6	7	8	9	
lan descripti	on							
5.67	4.50	5.35	5.35	4.50	4.50	7.50	5.35	
73	73	28	35	40	50	73	73	
19,28,35,	19,28,35,	19,28,	19,28,	19,28,	19,28,35,	19,28,35,	19,28,35,	
40,73	45,73	35	35,40	40,50	40,73	50,73		
nomic impacts	(equivalent an	nual values i	n thousands of	dollars)				
60	-60	-120	0	-60	-60	60	0	
-93	12	0	- 56	12	12	-1,115	0	
60	-120	-3 0	0	-120	-120	Ü	0	
13	19	-171	-39	- 15	8	39	14	
0	0	-293	0	-0	-0	293	0	
-7	- 7	-12	-16	-14	-14	-17	-16	
33	-156	-626	-111	-197	-174	-740	-2	

om alternative l. Minus indicates a decrease in relative

Alternative 6

This plan requires 4.50 MAF of storage space on 1 January and has release steps of 19,000; 28,000; 35,000; and 40,000 ft³/s. The greatest economic impact of alternative 6 compared with alternative 1 is a reduction in MWD diversions of about 4,000 acre-feet per year with an annual value of \$120,000. Flood control under alternative 6 would be slightly less effective than under alternative 1; flood damages would average about \$15,000 a year more. Ending storage would be improved slightly by about 5,000 acre-feet. Hydropower generation would be 2 mkwh less than under alternative 1. Operation and maintenance costs would be about \$14,000 a year higher than for alternative 1. Average annual net benefits under alternative 6 would be \$197,000 less than under alternative 1.

Alternative 7

Alternative 7 is the same as alternative 6 except that an additional release step of $50,000~\rm{ft}^3/\rm{s}$ has been added as the maximum controlled release. The overall economic impacts would also be the same as alternative 6 except for flood control, which would be slightly less effective under alternative 7. Average annual net benefits would be \$174,000 less than alternative 1.

A THE PERSON AND ADDRESS OF THE PERSON AND A

Alternative 8

The purpose of this plan is to demonstrate the effect of providing a relatively large 1 January storage space each year. The plan calls for 7.50 MAF to be provided each January. Step releases are the same as those used in alternative 1. Alternative 8 would out-perform alternative 1 in preventing flood damages by about \$39,000 on an average annual basis. Annual hydropower production would also be increased by 2 million kilowatt hours. The plan would also improve salinity. The large 1 January storage requirement would exact a high price in stored water to gain its advantages in flood protection and improved salinity. At the end of the 10-year study period, Lake Mead would contain about 511,000 acre-feet less water in storage than under alternative 1. The plan would not enable an increase in diversions to MWD, so the entire reduction in storage would be lost to the Gulf of The average annual value of water lost would be California. \$1,115,000. Alternative 8 would also have the highest operation and maintenance costs by a small margin over alternatives 5, 6, 7, and 9 and by about \$17.000 over alternative 1. Net annual benefits for alternative 8 would be about \$740,000 less than for alternative 1. The environmental analysis for the study concluded that the environmental differences among the nine alternatives studied would not significant. However, alternative 8 would have a small environmental superiority based on certain comparisons. Based on peak average monthly flows, alternative 8 would have an advantage over the other plans because monthly peaks for floods greater than the 20-year (5-percent chance) flood would be lower under this alternative. At least some of the advantage of lower peaks would be lost because of greater duration

of these peak flows which would also be of environmental importance. A more significant environmental advantage of alternative 8 would be its high 1 January storage requirement, which would tend to shift peak flows to the August-through-December space-building period, thus reducing the likelihood of peak flows during the environmentally sensitive spring and early summer period.

Alternative 9

The only difference between this plan and alternative 1 is a change in one of the step releases from 40,000 to 50,000 ft³/s. The economic impacts of alternative 9 would also be the same as those of alternative 1 except for a small improvement (\$14,000 average annual) in flood control and an increase of \$16,000 a year in average annual operation and maintenance costs. Net economic benefits from all sources would be about the same for alternatives 1 and 9.

SOCIAL IMPACTS

Differences in social impacts among the nine alternatives are difficult to discern. Social impacts to be considered might include injury, death, displacement from one's home, and the emotional trauma of heavy individual financial losses. Social impacts normally correlate well with the number of inhabited structures and public-use structures subject to flooding. Along the Lower Colorado River, the Parker Strip reach contains the most inhabited and public-use structures with the greatest vulnerability to flooding, and, therefore, would endure the majority of the social impacts from flooding. Table 6 shows the number of structures in the Parker Strip reach subject to flooding by flows of 30,000 and 40,000 ft³/s. Depths of flooding for these flows would range up to 4 and 6 feet, respectively.

Table 6. Number of structures subject to flooding in Parker Strip.

	Number of structures affected by flow of				
Туре	30,000 Ft ³ /s	40,000 Ft ³ /s			
Residential	34	46			
Mobile homes	17	90			
Commercial	1	5			
Semipublic	0	6_			
Total	52	147			

One measure for comparing the social impacts of the alternative plans is the frequency with which structures would be flooded. Table 7 lists by alternative the frequency of 30,000- and 40,000-ft $^3/$ s flows resulting solely from Hoover Dam releases.

Table 7. Number of times in 100 years that flows resulting solely from Hoover Dam releases would be equaled or exceeded through Parker Strip.

Flow	Alternative plan								
Flow (ft ³ /s)	1	2	3	4	5	6	7	8	9
30,000	4.0	4.0	4.0	0.90	4.0	4.0	4.0	0.8 Less than	
40,000	0.32	0.30	0.60	0.71	0.59	0.49	0.56	0.1	

Based on the frequency of flooding of structures in Parker Strip, alternative 4 would have an advantage at 30,000 ft³/s, but carries a greater risk of larger floods than all the other alternatives. Alternative 8 has a definite frequency of occurrence advantage at $30,000 \text{ ft}^3/\text{s}$ and maintains the advantage for larger flows. disadvantage of alternative 8 not disclosed by the frequency analysis would be greater duration of high flows and larger nonpeak flows. These characteristics would have some negative social Many of the Parker Strip particularly in displacement from homes. homes are secondary or vacation residences, which would somewhat soften the impact of displacement. Because the social impacts through the Parker Strip are indicative of the impacts through all developed reaches, the analysis can be considered representative of all reaches.

Sufficient warning time would be available with all alternatives to prevent injury or death resulting from unexpected flood waves. Any time larger- and faster-than-normal flows occur, however, a possibility for accidents exists. Injury and death resulting from careless or reckless behavior or during flood-fight operations can occur. All nine alternatives pose this threat. None of the plans has any obvious advantage in safety.

Social impacts could also result from shortages of water and hydropower. The impacts of most of the alternatives, however, would be mainly in the nature of inconveniences caused by conservation measures requiring reduced uses of these resources for luxury purposes. Alternative 8 could, under extreme drought conditions, result in somewhat more serious water shortages.

DIVISION OF RESPONSIBILITIES

Responsibility for implementing the selected flood control operating plan would be the same under all alternatives, and would rest primarily with the Federal Government through the Bureau of Reclamation and the Corps of Engineers. These two agencies would be responsible for preparing appropriate regulation manuals and other working documents. At the time of actual flood control operation, the Corps of Engineers would have the ultimate decision-making responsibility, which would be

exercised only after consultation with the Bureau of Reclamation in particular, and other concerned agencies, including the U.S Section, International Boundary and Water Commission. The Bureau of Reclamation would be responsible for the physical operation of Hoover Dam, and also for the operation and maintenance of channels and levees along the Lower Colorado River, as well as for emergency flood-fighting operations should the need arise. Local governmental agencies, the Bureau of Indian Affairs, and the Bureau of Land Management would have no direct responsibility for implementing the selected plan. These agencies would have indirect responsibilities for (1) providing both emergency and non-emergency information to the Bureau of Reclamation and the Corps of Engineers; (2) discouraging inappropriate development in the flood plain within their jurisdictions; and (3) providing flood warning, flood fighting, and other emergency actions within their jurisdiction.

PUBLIC INVOLVEMENT

The following section details public involvement in the preparation of this report.

Public Meeting Viewpoints

Prior to preparation of a draft report on the study, public involvement was initiated through work-group meetings and a series of six public meetings (April and May 1979) to obtain the views of non-Federal agencies and private interests. A brochure, titled "Study for Reevaluation of Hoover Dam Flood Control Regulations," which summarized study objectives, alternatives considered, and findings, was distributed to all meeting participants. As expected, the views, although accompanied by expressions for reasonable compromise, corresponded to the vested interests of the respondents.

Of all the groups that could be affected by flood control releases from Hoover Dam, property owners along the river are the most directly threatened. This group expressed its concerns in several different ways, particularly at the Needles and Parker public meetings, but they can be summarized as a desire to limit flood releases to a nondamaging level. Additionally, riparian property owners and others engaged in daily activities along the river showed concern over the large daily fluctuations in flows. A desire was expressed that the smaller daily flows be increased in size by using flood control releases to smooth the daily fluctuations.

Several agricultural water users' organizations responded to the study, both in writing and with oral statements at the public meetings. In general, the water districts recognized the potential need for flood control releases, but expressed concern that Lake Mead should not be so depleted that agricultural water supplies would be threatened by several consecutive drought years.

At the Los Angeles public meeting, the Metropolitan Water District (MWD) contended through a prepared statement that the economic benefits to be gained from water conservation and hydropower production by maintaining only minimal flood control storage space in Lake Mead would far outweigh potential flood damages. The District suggested that 1 January Lake Mead storage could be reduced to 4.10 MAF, and the flood problem could be resolved by flood plain zoning, relocation, and other methods to provide a minimum channel capacity of 35,000 ft³/s downstream from Hoover Dam. The MWD believes that the cost of providing additional channel capacity would be justified by increased water and power benefits. The District disagreed with the unit costs used in the study for water and power benefits and suggested that \$150 per acre-foot and 40 mils per kilowatt-hour would be more appropriate. A letter received from the Central Basin Municipal Water District of Downey, California, expressed support for MWD's position.

In a letter responding to the public meeting notice, the California Department of Water Resources expressed the intent to work with MWD and the Colorado River Board of California to develop "* * means of putting to beneficial use those waters that otherwise would be in excess of Lower Basin water demands and storage capacity." The Department also urged the use of flood-plain-management measures, such as the purchase of rights-of-way and land-use controls, to reduce future flood hazard along the Lower Colorado River.

The Colorado River Board represents California in exercising the State's rights and interests in the Colorado River. Because the Board represents all California citizens, it has an interest in all facets of the river's operation. The Board, however, considers the major benefit to California to be water for agricultural and municipal and industrial uses. The Board urges that strong weighting be given to maintaining Lake Mead as full as possible while, at the same time, providing protection against flooding. The Board recommended the selection of either alternative 1 or alternative 9 as the best compromise among all project purposes.

The Arizona Department of Water Resources (ADWR) is a broad-based agency responsible for water resources planning in Arizona. Protection of Arizona's rights and interests in Colorado River waters is one of the duties of the ADWR. The ADWR urged the selection of either alternative 1 or alternative 9 as the recommended flood control operation plan for Hoover Dam.

As a result of the public meeting, three formal responses addressing environmental issues have been made. Letters have been received from the Maricopa Audubon Society, the Arizona Game and Fish Department, and the California Department of Fish and Game.

The Audubon Society comments stressed protection of the endangered Yuma Clapper Rail and urged that releases greater than 20,000 ft 3 /s be prohibited in the February-through-April period. The Society's concern is that greater releases during the early spring would flood nests, eggs, and riparian vegetation needed for cover.

The Arizona Game and Fish Department recognizes the potential for environmental damages resulting from Hoover flood control releases. The Department agrees with the concept that some environmental benefits may also result from flood releases.

The California Department of Fish and Game favors new regulations for operating Hoover Dam that would result in higher winter flows on the Lower Colorado River. The Department believes a continuous flow of about $4,000~\rm{ft}^3/\rm{s}$ would provide optimum fish and wildlife conditions, and also considers the time of year of large flood control releases to be more important than their magnitude.

The adverse impacts of floodflows in Mexico would occur primarily as damages to agriculture in the flood plain between the river and the levees. The Government of Mexico has indicated a preference for alternative 8, which provides the highest level of control of magnitude and frequency of flood discharges from Lake Mead. However, the probability of higher discharges below Morelos Dam is greater in that alternative than in the others during the 1 August to 1 January spacebuilding period because there would be longer periods of sustained high discharges from Lake Mead and, hence, a greater probability of concurrence of high river discharge and flood discharges from tributaries downstream from Lake Mead. Moreover, alternative 8 as discussed hereinafter would provide the lowest water conservation benefits.

Coordination of February 1981 Draft Report

A draft of this report, dated February 1981, was distributed to appropriate private interests, and local, State, and Federal agencies along with a formal request for comments on the study and its recommendations. Appendix G presents all written comments received along with responses to the issues raised. Nearly all the responses were favorable to the conclusions and recommendations adopted as a result of the study. The only clear preference for a plan other than the recommended plan of operation was the Arizona Game and Fish Department's choice of alternative 6, because this alternative would cause somewhat less annual fluctuation in the Lake Mead water surface elevation, thereby minimizing impacts on aquatic ecosystem in the lake.

COMPARISON OF PLANS

This section compares the alternative plans and establishes a rationale for selecting one of them for implementation.

Comparison of the magnitude of the relative net benefits of alternatives 2 through 9 against the net benefits for alternative 1, as given in table 4, shows that the economic impacts of Lower Colorado River flooding are not highly sensitive to the Hoover Dam flood control operation plan within the limits of the plans formulated. Only alternative 2 was superior to alternative 1 in the production of relative net benefits and then only by \$33,000 annually. The difference in net benefits between alternatives 1 and 9 is negligible; alternative 9 would produce about \$2,000 a year less than alternative 1 on a average annual basis. Alternative 8 produces the lowest annual net benefits, \$740,000 a year less than alternative 1.

The reason for the relatively small spread in average annual benefits among the nine alternatives evaluated lies in certain features of the flood control operation common to all the plans. First, snowmelt flood releases are based on forecasts of reservoir inflow that are updated monthly. Hence, all plans have a self-adjusting (correcting) component that tends to produce similar total volumes of water released, and thereby, similar end-of-year water in storage. Second, the series of steps below 40,000 ft 1/s tend to produce lower annual peak release rates, but of longer duration. The resulting effect is that damaging flood control releases are minimized While hydropower generation is maximized and excess water is made available for diversion and use for longer period of time. Again, calling for stepped releases below $40,000 \text{ ft}^{5}/\text{s}$ is common to all plans. Third, the relatively high degree of flood control afforded by all the plans means that differences in level of protection occur with fairly rare events that tend to be smoothed out in the computation of average annual costs and benefits.

Five plans (alternatives 2, 3, 7, 8, and 9) provide lower average annual flood damages than alternative 1. Average annual flood damages for these alternatives range from \$8,000 to \$39,000 less than alternative 1. The relatively small gains in flood protection are generally more than offset by reduced economic benefits in other areas considered (water conservation, hydropower, salinity, et al). Alternatives 4 and 5 provide less flood protection than alternative 1.

Based solely on the magnitude of economic benefits, water con revation is the most significant economic parameter effected by Hoover Dam flood control operation. Alternatives 1 and 9 would produce the highest water conservation benefits. Alternatives 3, 6, and 7 would cause more water to be held in Lake Mead at the end of the planning period, but the value of the stored water would be more than offset by reductions in diversions of excess water to MWD. Alternative 8 provides the lowest water conservation benefits.

Differences in effects on salinity among the alternatives are relatively small except for alternatives 4 and 8. Alternative 4 would increase salinity costs about \$293,000 a year, whereas alternative 8 would reduce salinity costs by about \$293,000 a year.

Alternatives 2 and 8 would provide for the highest level of hydropower generation. Both plans would produce a net average annual increase of 2 million kilowatt hours over alternative 1. Alternatives 3, 4, 6, and 7 would produce less hydropower than alternative 1.

Alternative 1 would require the least maintenance costs, and alternative 8 the highest maintenance costs; however, alternative 8 costs would only be \$17,000 more than alternative 1.

THE NATIONAL ECONOMIC DEVELOPMENT (NED) PLAN

The plan that produces the greatest net economic benefits to the nation is designated as the National Economic Development (NED) plan. Of the nine alternatives considered, alternatives 1, 2, and 9 best fit the NED definition.

None of the alternative plans has demonstratively greater environmental or social benefits. The small advantage that alternative 8 might appear to have based on frequency and timing of annual peak flows would be offset, at least in part, by increased duration of high flows.

THE PLAN SELECTED

Alternative 1, which retains the same storage allocation for flood control as the 1968 plan of operation, is selected as the plan to be recommended for implementation because of the high rate of economic benefits relative to the other alternatives. The slightly higher economic benefits generated by alternative 2 were not deemed sufficient to warrant an increase in 1 January flood control from 5.35 MAF to 5.67 MAF. The sensitivity of the determination of net benefits to relatively small changes in the value of economic factors makes the difference in average annual net benefits of \$33,000 between alternatives 1 and 2 insignificant. None of the plans has a significant advantage over alternative 1 in effects on the environment. Alternative 8 would produce less negative social impacts than alternative 1, but not enough to outweigh a comparatively poor performance in water conservation.

All the alternatives provide a relatively high degree of flood control protection. The objective was to determine the plan that, within the framework of flood control operation, generated a high level of economic benefit in the areas of hydropower generation and water conservation with minimal adverse environmental and social impacts. Alternative 1 meets that criterion.

SUMMARY

Hoover Dam is the only structure on the main stem Lower Colorado River with dedicated flood control storage. Prior to the construction of Hoover Dam, high flows occurred seasonally along the Lower Colorado River and damaging flows were common. When Hoover Dam was completed in 1935, control of most floods on the Lower Colorado River to an outflow of 40,000 ft $^3/s$ became possible. Few, if any, structures were located in the 40,000 ft $^3/s$ flood plain of the Lower Colorado River in 1935 and for some years thereafter. For many years the flood control operation plan for Hoover Dam has incorporated a "target maximum" release of 40,000 ft $^3/s$ not to be exceeded unless absolutely necessary. Encroachment of development into the flood plain in the past several decades, however, has created a situation in which significant damages would now result from a release of 40,000 ft $^3/s$ from Hoover Dam.

The construction of a system of reservoirs upstream from Hoover Dam from 1962 to 1966 eliminated the need for flood control releases between 1963 and 1980. With the filling of Lake Powell, a larger than normal runoff year could require flood releases that would produce damaging flows downstream from Hoover Dam.

Aside from some low-lying agricultural, recreational, and wildlife preserve areas, the residential and commercial development of the Parker Strip just below Parker Dam is the reach most vulnerable to flood damages. Damages that would result from a flow of 30,000 ft⁵/s through Parker Strip are estimated at \$150,000. Damages in the Parker Strip would increase rapidly as flows increase above 30,000 ft $^3/s$. Needles, minor damages would occur from flows of 40,000 ft $^3/s$. 40,000 ft³/s damages in the Needles reach would be about \$1.8 million, mostly to agricultural development. At Blythe, a 50,000 ft⁵/s flood would cause estimated damages of about \$140,000 to residential property and mobile homes, and total damages of about \$1.2 million. At Yuma, all but extremely rare floods would be contained between the existing Development, however, has taken place between the levees. A flow of 16,000 ft 3 /s would flood some low-lying fields. A flow of 40,000 ft³/s would flood many fields and a number of buildings. A flow of 70,000 ft^3/s would flood virtually all development between the Yuma levees, including about 40 buildings, irrigation canals, and extensive cultivated fields.

Because Hoover is a multipurpose dam, water conservation, power production, recreation, and maintenance of the natural environment, as well as flood control, must be given adequate consideration in the development of a flood control operation plan.

In order to demonstrate the effects of favoring flood control, water conservation, and power generation in turn, nine alternative operation plans designed to favor each of the three purposes to varying degrees were formulated and analyzed. Of these plans, alternative 1 was selected as the plan to be implemented. Major features of the plan are:

- 1. It requires that a minimum 1.5 million acre-feet of storage space be made available on 1 August of each year for the control of rainfloods.
- 2. It requires that a minimum storage space of 5.35 MAF be made available on 1 January of each year for the control of snowmelt floods during the spring and summer.
- 3. It has a maximum controlled release of $73,000 \text{ ft}^3/\text{s}$ to be exceeded only by uncontrolled spillway flows.
- 4. Space-building releases to provide required 1 January storage space begin on 1 August of each year.
- 5. Space-building releases through the period of August through December are limited to $28,000~\rm{ft}^3/\rm{s}$.
- 6. The selected plan incorporates a set of release steps of 19,000; 28,000; 35,000; 40,000; and 73,000 ft^3/s to be used for the control of snowmelt floods.
- 7. Reservoir operation during the months of January through July are based on a snowmelt runoff forecast updated monthly.
- 8. Available storage space in Lake Powell and effective storage space in other upstream reservoirs may be counted in lieu of space in Lake Mead.

There would be no direct costs for implementing the selected plan. The plan would produce economic benefits roughly equal to or better than any of the alternatives studied.

The selected plan would not have environmental impacts significantly different from the other plans as described in the Finding of No Significant Impact and Environmental Assessment in appendix E.

CONCLUSIONS

The District Engineer concludes that:

- 1. A high probability exists that flood control releases of a damaging magnitude will be required from Hoover Dam within the next 10 years.
- 2. A flood control operation plan for Hoover Dam can best be defined by specified storage-space requirements for 1 August through 1 January of each year and a series of incremental releases or release steps to be applied from 1 January to 1 August. The step release to be applied during a given month would depend upon storage space available and the monthly updated runoff forecast.
- The 1968 operation plan called for space-building releases during the months of October through December. Extending this period to August through December would have the effect of reducing the size of required flows and, consequently, reducing the potential for flood damages without any adverse effects. During the August-through-December period, when no runoff forecast is available, space-building releases that would cause damage to inhabited structures are not justified. Therefore, sustained releases during this period should be limited so as to not exceed $28,000 \text{ ft}^{5}/\text{s}$, presently estimated as the largest release from Hoover Dam that will not damage inhabited structures. concluded that the recommended revised flood control criteria for Lake Mead and Hoover Dam could create little, if any, effect on the operation of Lake Powell. The space building requirements would not, of themselves, cause greater flow rates or volumes below Glen Canyon than have occurred historically or would have been expected under the 1968 regulations.
- 4. The alternative plans presented in this report encompass a range of storage provisions and step-release patterns to demonstrate the effect of varying these criteria.
- 5. Alternatives 1, 2, and 9 would produce greater net benefits than any other alternative. Net benefits for these three plans would be about the same. Alternative 1 more closely approximates the current plan of operation than any other alternative considered. Alternative 8 provides the least net benefits.
- 6. Alternative 8 would produce the greatest reduction in flood damages and, as a result, would have the most favorable social impacts. The advantage is not sufficient, however, to offset the plan's large detrimental effect on water conservation.

- 7. None of the plans would have a significant advantage in impacts on the natural environment (reference, the Finding of No Significant Impact and Environmental Assessment in appendix E).
- 8. Of the alternative flood control operation plans studied, alternative 1 is the best compromise among the many purposes of Hoover Dam. The plan: (1) provides a high degree of flood control, (2) produces net economic benefits approximately equal to or better than any of the other alternatives, and (3) causes no significantly increased environmental damages over the other alternatives.
- 9. Executive Order 11988, Flood Plain Management, dated 24 May 1977, encourages the preservation of flood plains in their natural state, thereby providing for the passage of floodflows without damage to development. Implementation of the selected plan, alternative 1, would not affect any construction in the Lower Colorado River flood plain. Also, the plan in itself would neither encourage nor discourage construction in the flood plain. Under any of the alternative plans studied, a large flood would tend to discourage further encroachment into the flood plain.
- 10. No direct costs would be incurred by the implementation of the selected plan.

RECOMMENDATIONS

The District Engineer, U.S. Army Corps of Engineers, and the Regional Director, Bureau of Reclamation, recommend that:

- 1. Alternate 1 be adopted and implemented as the flood control operation plan for Hoover Dam, and that all relevant operation manuals and documents be revised to reflect the provisions of the selected plan.
- 2. The Hoover Dam flood control operation plan be reviewed for appropriateness and relevance after the full implementation of the Central Arizona Project taking into account also the effects of increased uses of water in the Upper Colorado River Basin.
- 3. The Bureau of Reclamation will continue a policy of vigorous implementation of Executive Order 11988, Flood Plain Management, with the objective of minimizing development of flood-prone land along the Lower Colorado River.

PAUL W. TAYLOR


Colonel, CE

District Engineer


N. W. PLUMMER

Bureau of Reclamation

Regional Director

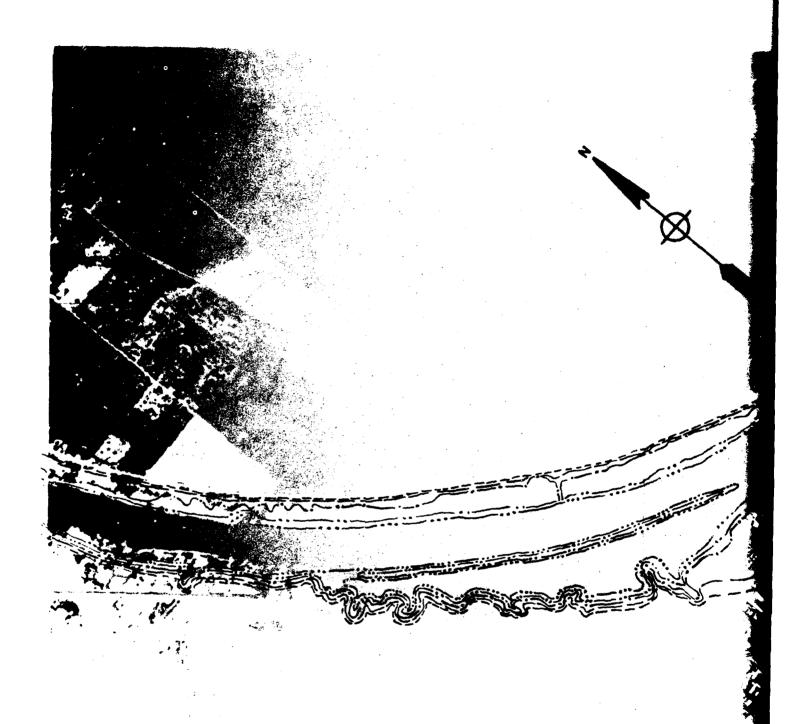

I IN.=1000 FT.

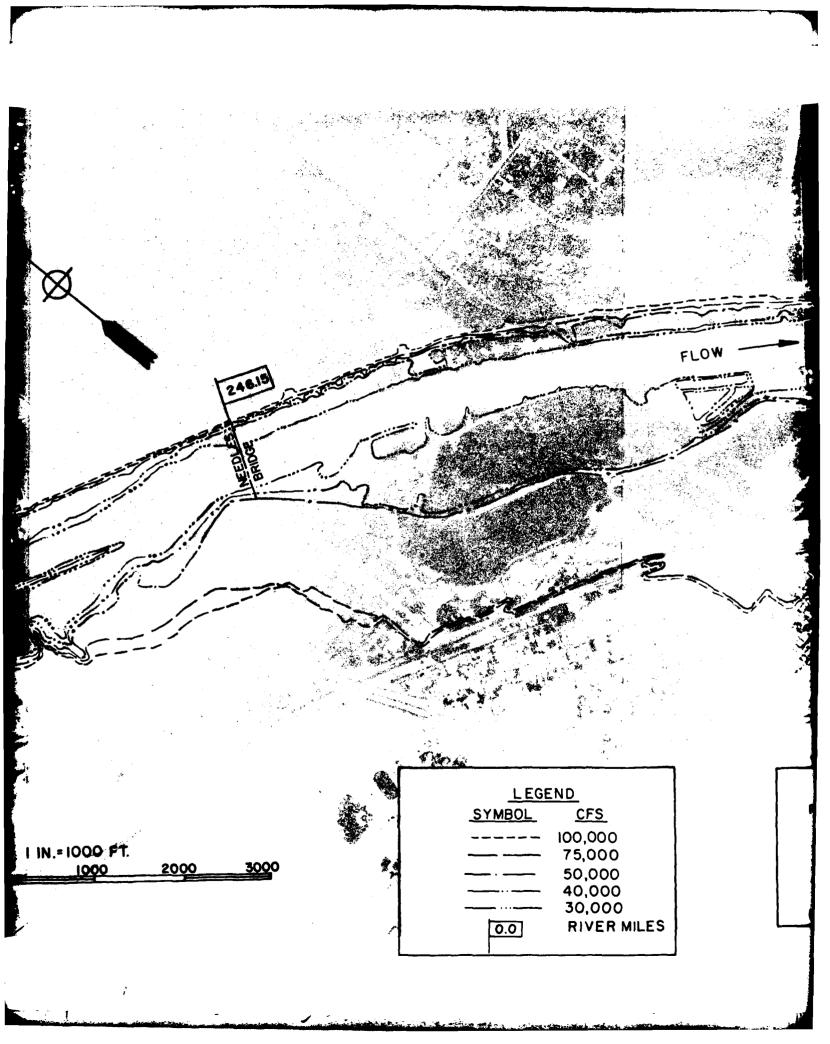



EGEND

<u>CFS</u>

100,000

75,000

50,000

40,000

30,000

RIVER MILES

COLORADO RIVER BASIN
HOOVER DAM
REVIEW OF FLOOD CONTROL REGULATION

AREA SUBJECT TO INUNDATION NEEDLES, CALIFORNIA


U.S. ARMY ENGINEER DISTRICT LOS ANGELES, CORPS OF ENGINEERS


PLATE 2




HD-6




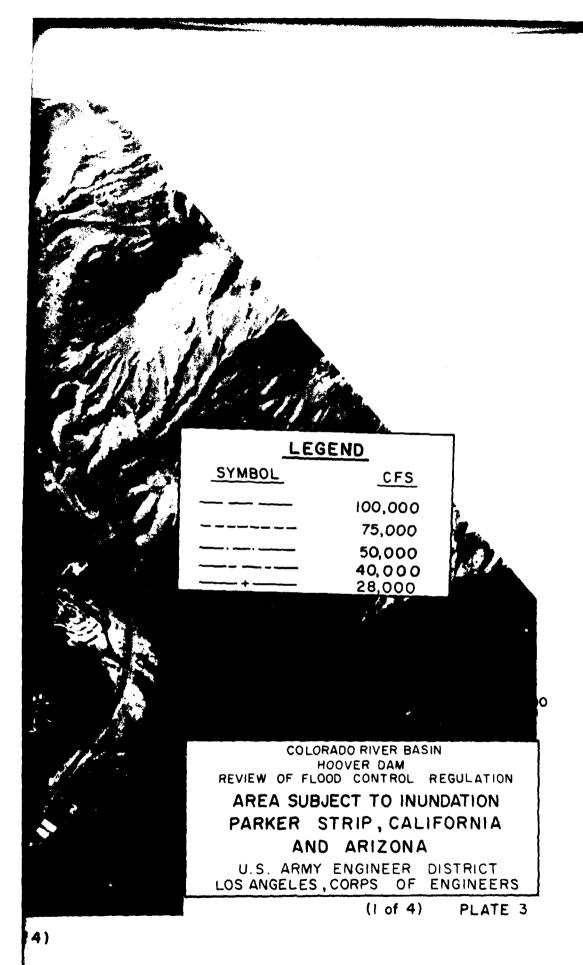


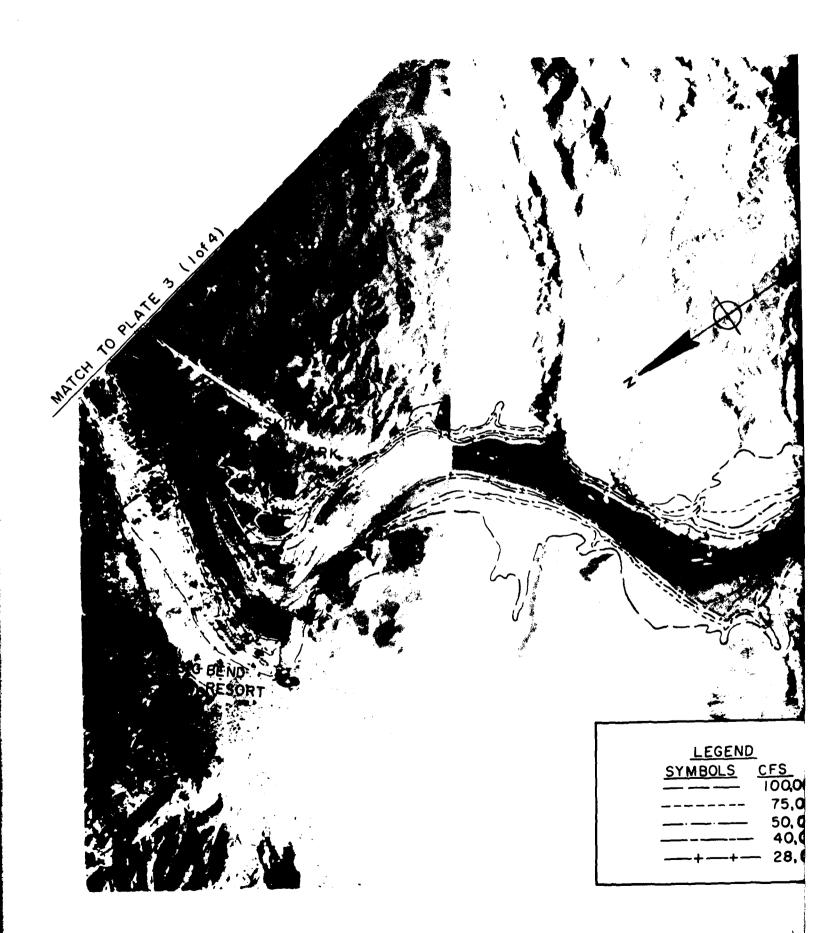

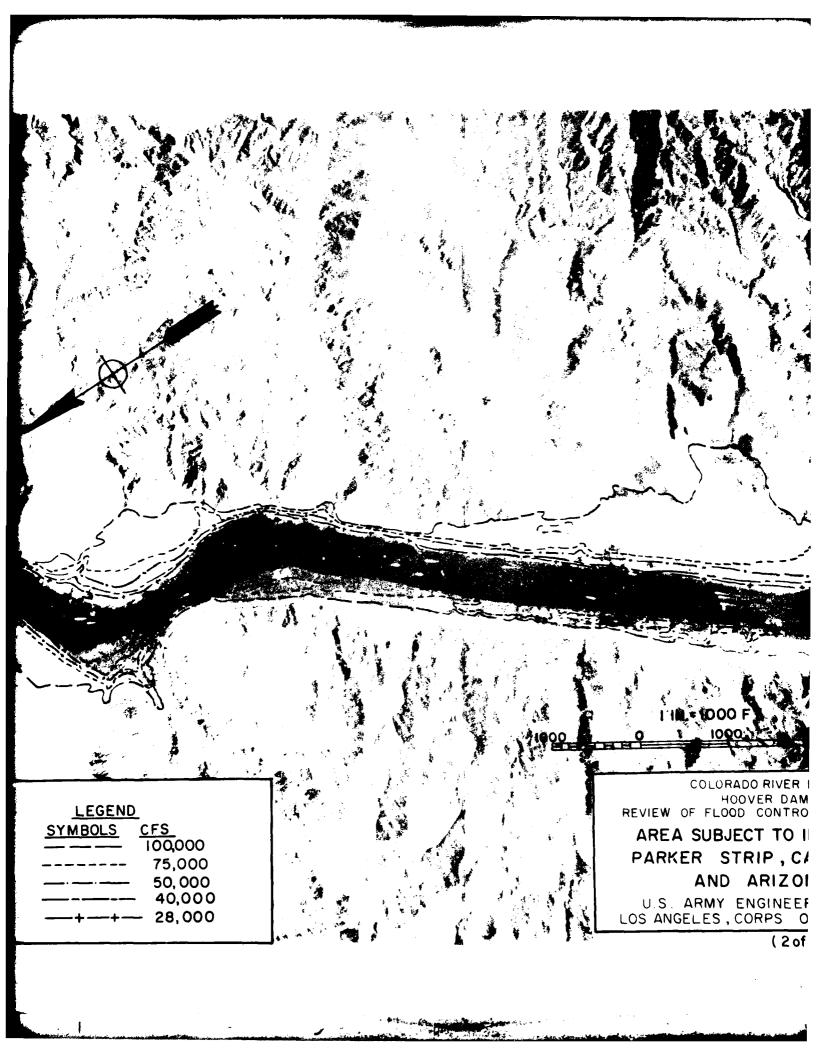



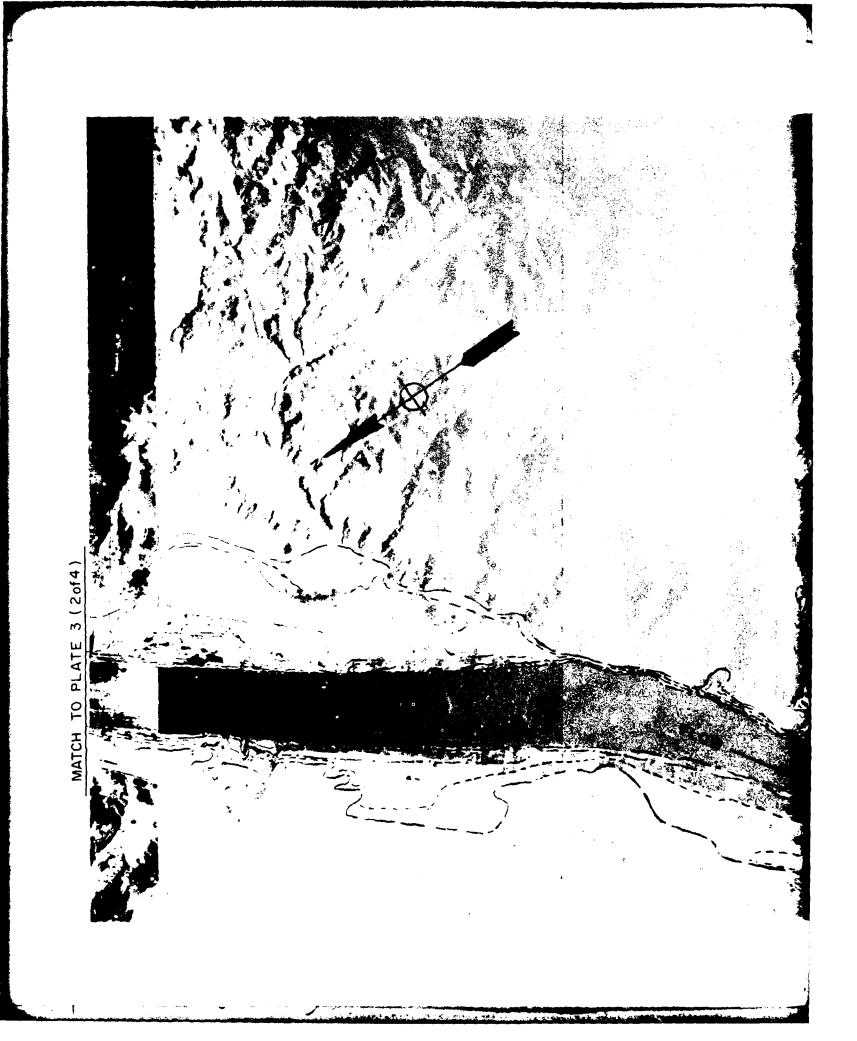

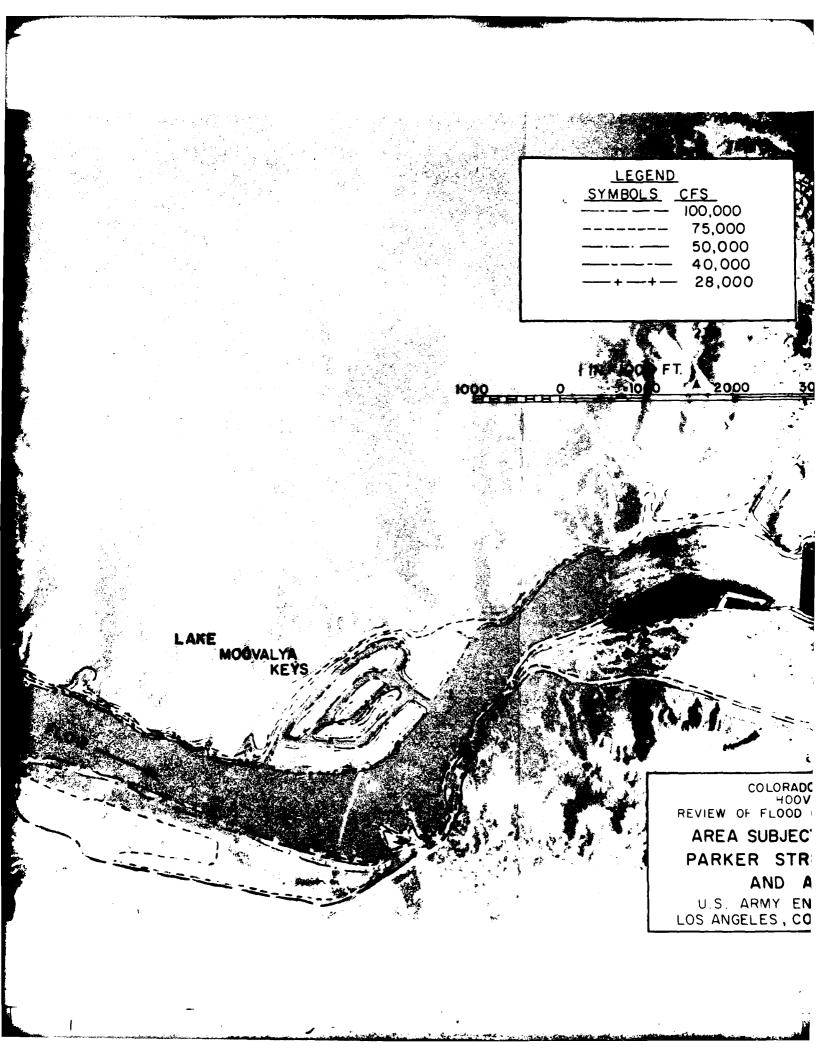




AREA SUBJECT TO INUNDATION PARKER STRIP, CALIFORNIA AND ARIZONA


U.S. ARMY ENGINEER DISTRICT LOS ANGELES, CORPS OF ENGINEERS

(3of4) PLATE 3


(4 of 4

TO PLATE

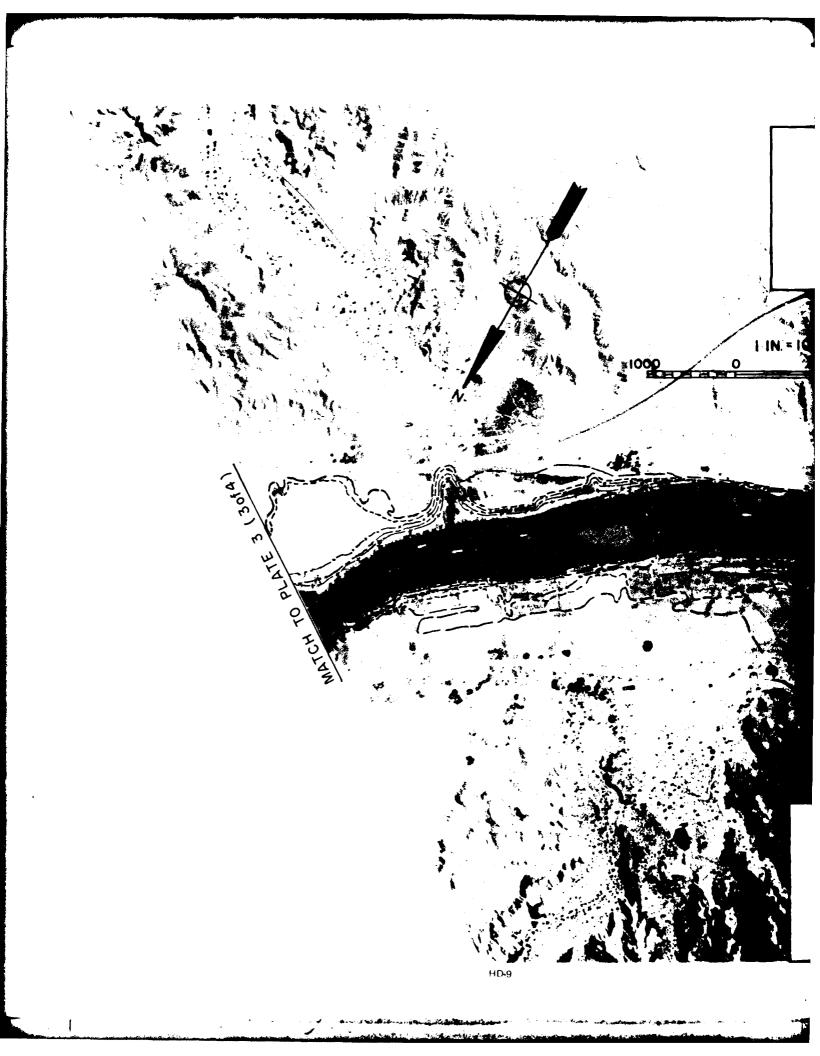

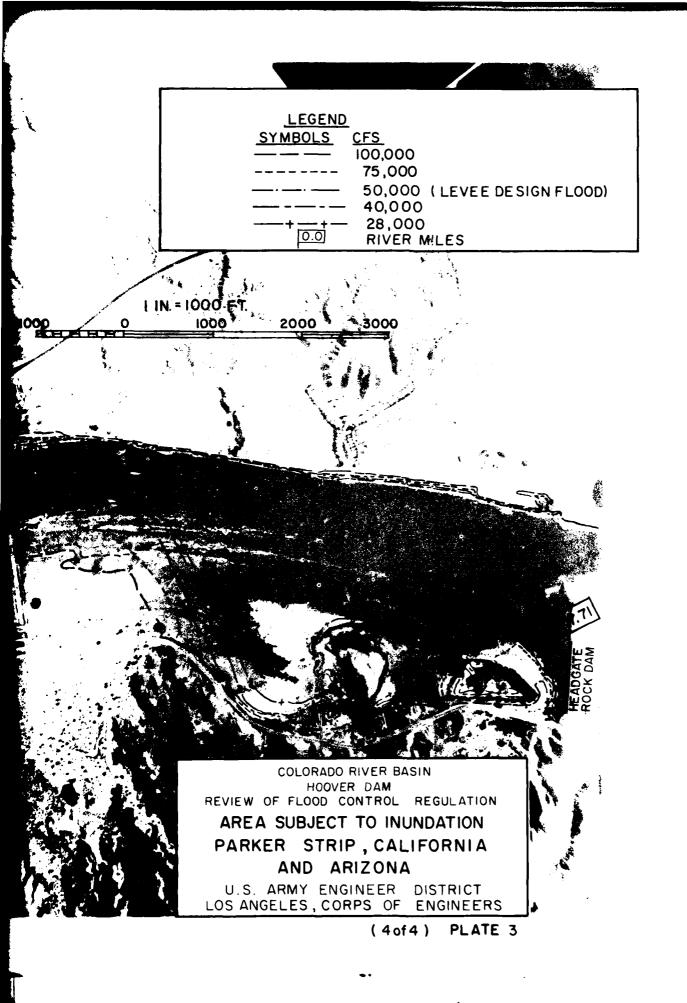




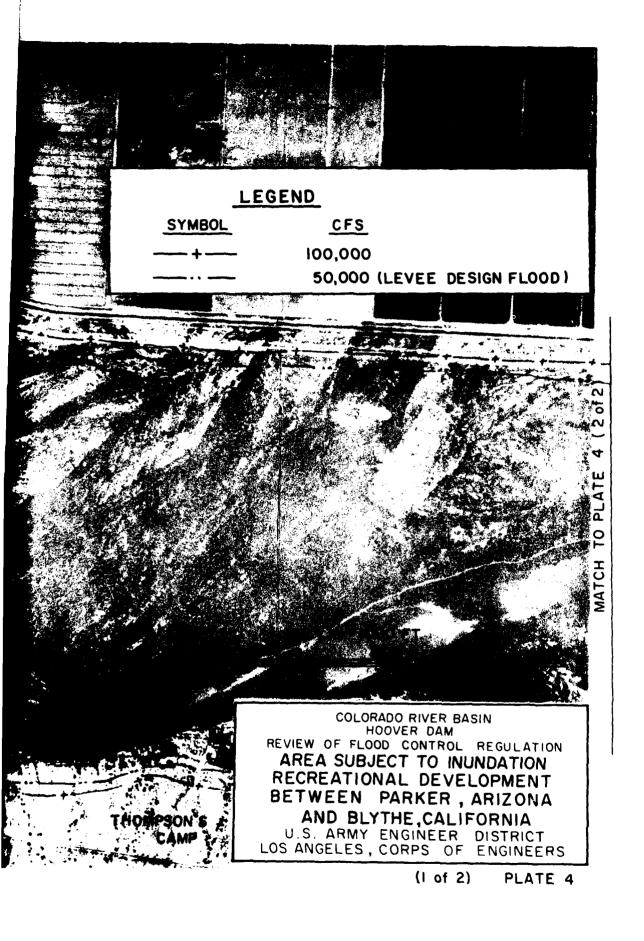



HD-11

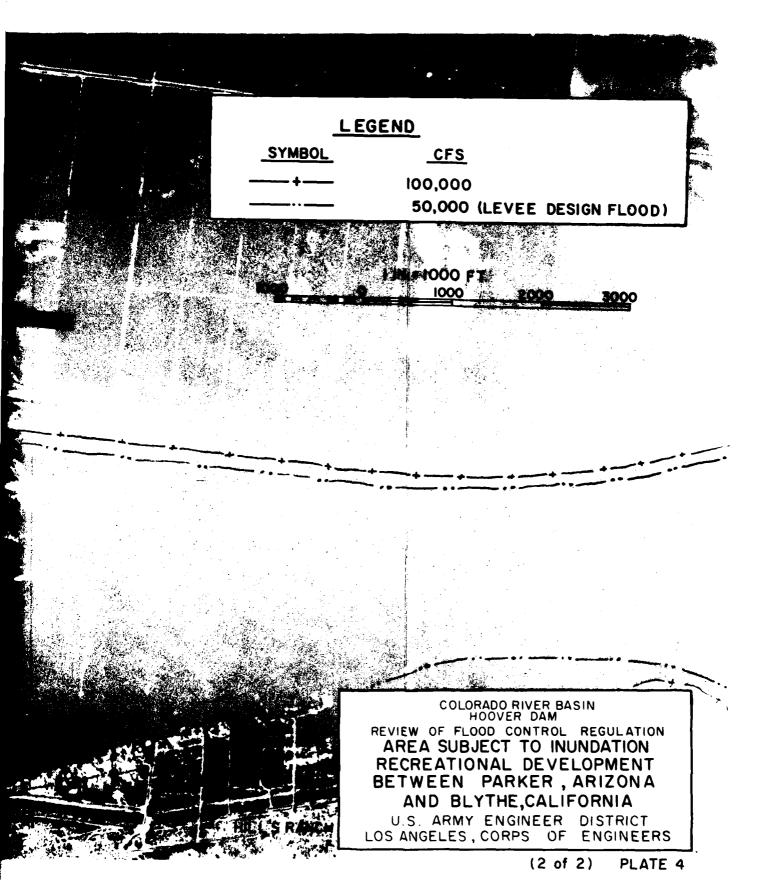


LEGEND


SYMBOL


<u>CFS</u> 75,000 (LEVEE DESIGN FLOOD) 50,000



HD-12

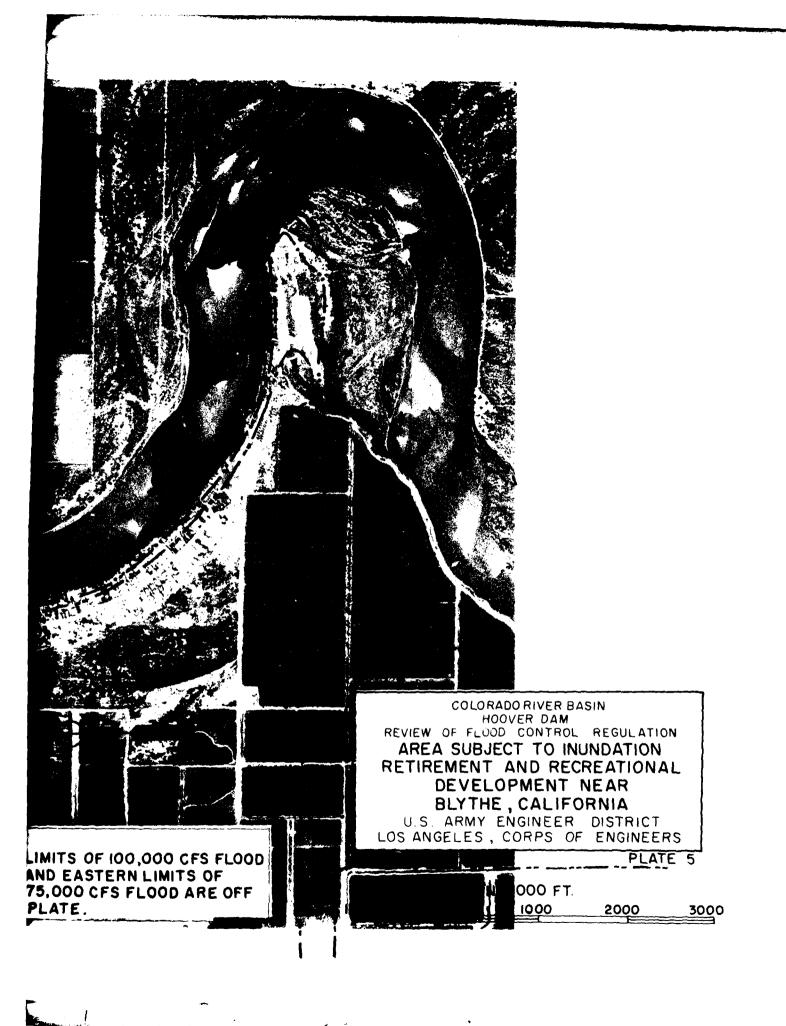

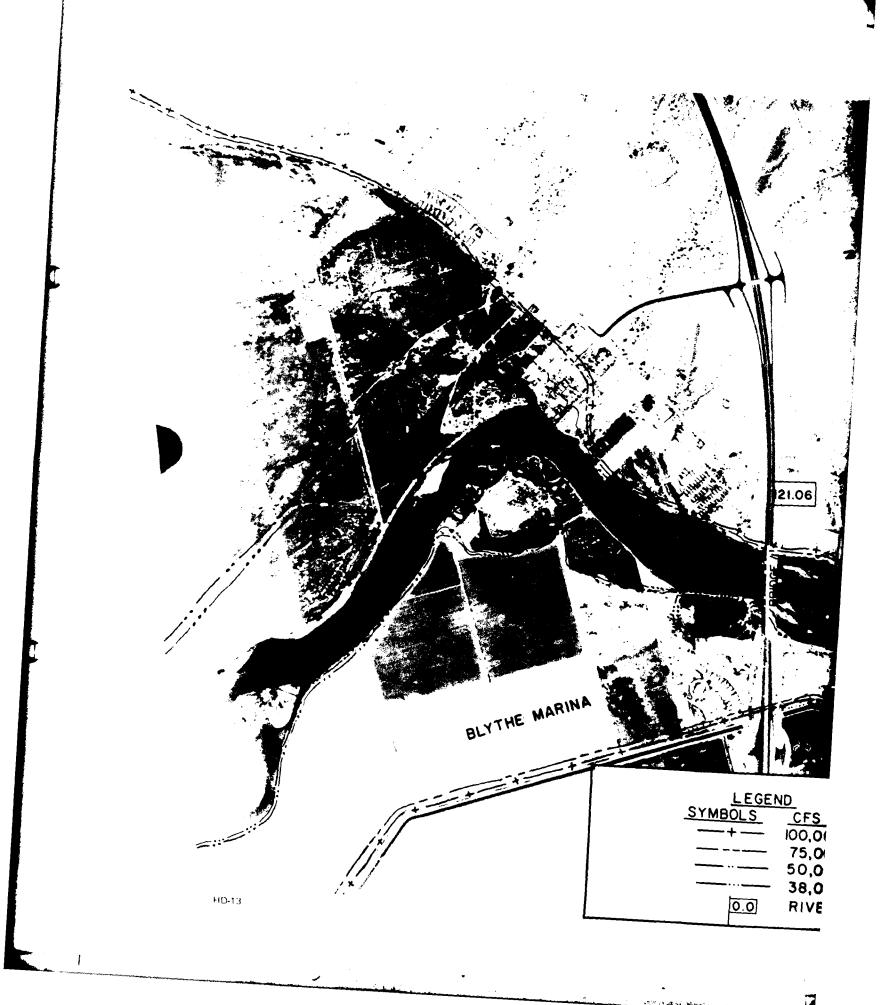

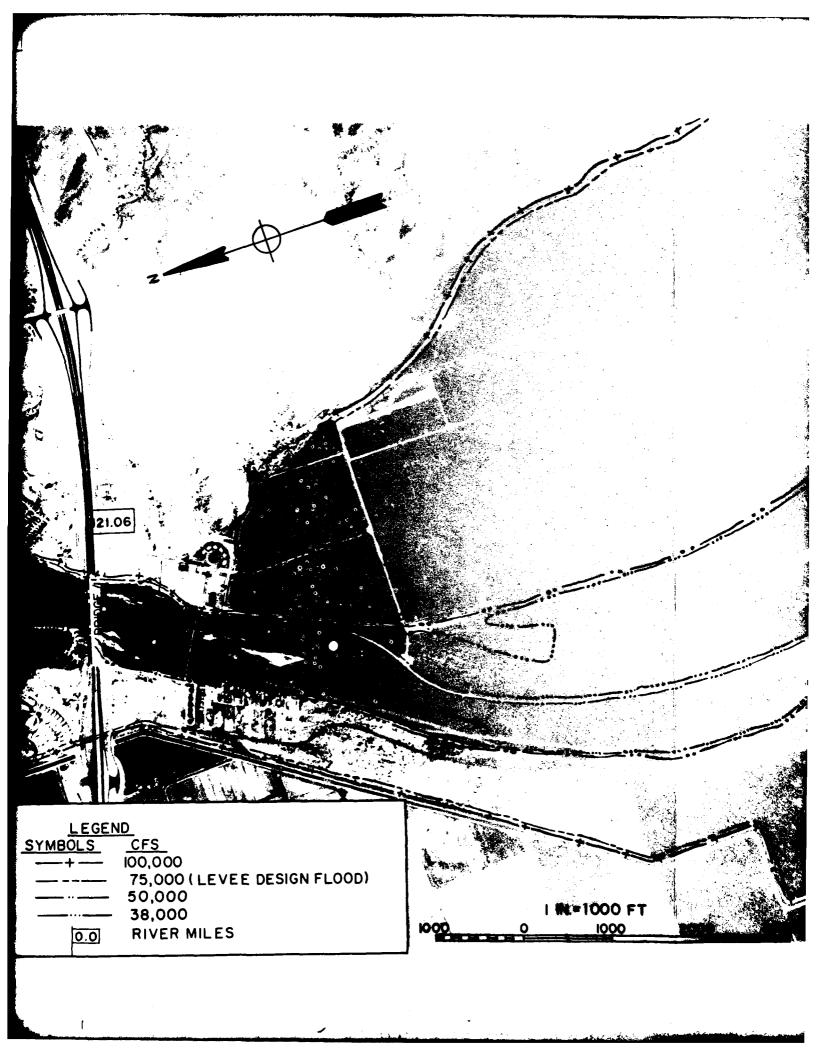



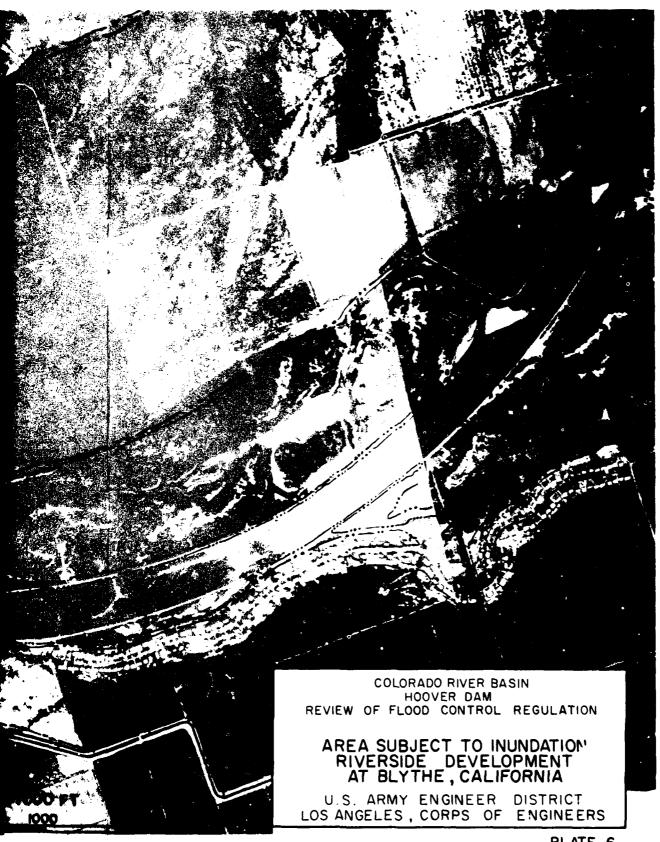


PLATE 6






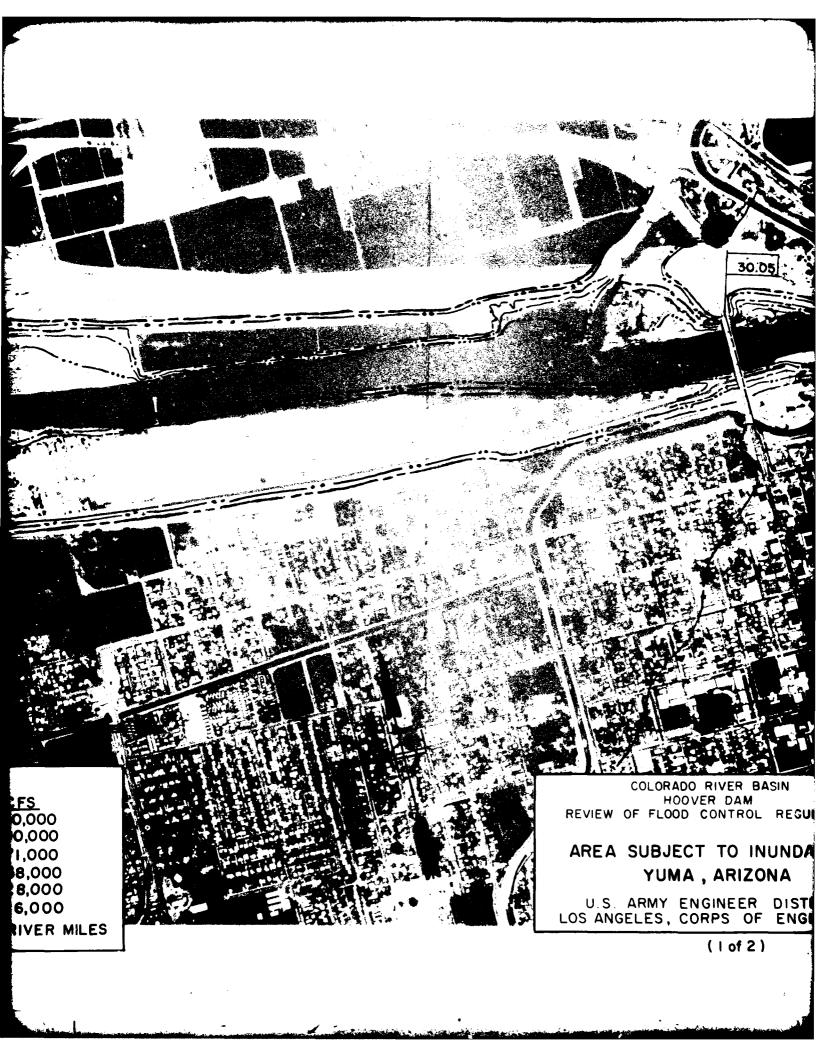

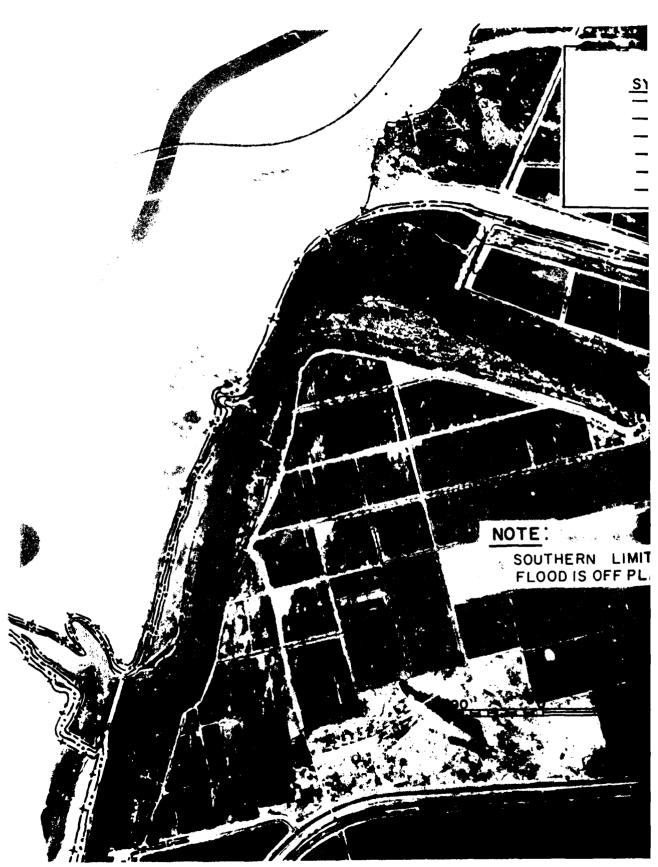

HD-15

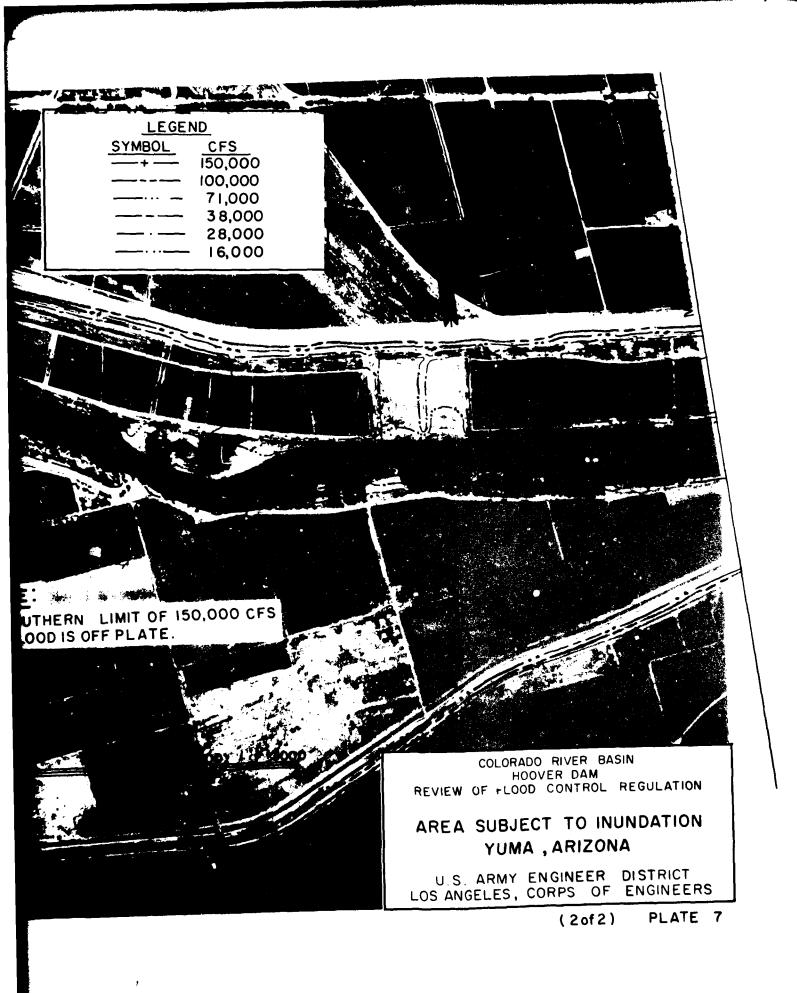

APPENDIXES

APPENDIXES

CONTENTS

- A. ENGINEERING
- B. EXISTING RIVERWORKS
- C. ECONOMIC EVALUATION OF ALTERNATIVE PLANS
- D. EVALUATING THE THREAT OF OVERFLOWS INTO THE UNITED STATES
- E. FINDING OF NO SIGNIFICANT IMPACT, AND ENVIRONMENTAL ASSESSMENT
- F. RECOMMENDED FIELD WORKING AGREEMENT BETWEEN DEPARTMENT OF THE INTERIOR, BUREAU OF RECLAMATION, AND DEPARTMENT OF THE ARMY, CORPS OF ENGINEERS
- G. AGENCIES' VIEWS AND RESPONSES

Appendix A ENGINEERING

Appendix A ENGINEERING

CONTENTS

		Page
Run	JENCY ANALYSIS	A-1 A-1 A-2
Inf Eva Ban Mir Max Min Max Rel Des App HYDRA Nee Par Bly	AADO RIVER STORAGE PROJECT SIMULATION MODEL Plow	A-20 A-21 A-21 A-21 A-21 A-22 A-22 A-22 A-23 A-23 A-26
	<u>Tables</u>	Page
A-1	Estimated natural flow for the Colorado River at Lees Ferry	A-3
A-2	Regulated monthly Lake Mead historical inflow adjusted to 1980 conditions for alternative 1	A-7
A-3	Monthly releases from Lake Mead based on the historical record adjusted to 1980 conditions for alternative 1	A-11
A-4	Net average monthly depletions and diversions from the Lower Colorado River	A- 15
A-5	Maximum 1-month discharge frequency values in ft ³ /s	A-17

Plates

- A-1 Volume-frequency curves, Colorado River downstream from Hoover Dam, alternative 1.
- A-2 Volume-frequency curves, Colorado River at Lees Ferry, natural flows.
- A-3 Discharge-frequency curves, maximum 1-month, average flow, alternative 1.
- A-4 Water-surface profiles, Needles, California, area.
- A-5 Water-surface profiles, Parker Dam to Headgate Rock Dam.
- A-6 Water-surface profiles near Blythe, California.
- A-7 Water-surface profiles at Yuma, Arizona.

Appendix A


ENGINEERING


FREQUENCY ANALYSIS

- 1. In support of damage frequency determinations described in appendix C and the main report, volume-frequency curves were developed at Lees Ferry and for five reaches of the Colorado River between Hoover Dam and the Gulf of California. Diversions from the river and flood control storage at Parker Dam dictated the selection of the reaches. The five reaches are (a) Hoover Dam to Parker Dam, (b) Parker Dam to Headgate Rock Dam, (c) Headgate Rock Dam to Imperial Dam, (d) Imperial Dam to Morelos Dam, and (e) Morelos Dam to the Gulf of California.
- 2. The frequency analysis utilized monthly flow values generated by the Bureau of Reclamation's Colorado River Storage Project (CRSP) Simulation Model at Hoover, Davis, and Parker Dams based on the historical streamflow records beginning in 1905. Subtraction of the appropriate net average monthly diversions from the releases at Parker Dam determined the downstream flow values in reaches from Parker Dam to the Gulf of California. The regulated frequency curves for durations of 1, 6, and 12 months were developed for the five reaches. Volume-frequency curves were also developed at Lees Ferry under natural (virgin) flow conditions.

Runoff Data

3. Gage height records on the Colorado River at Yuma are available from 1878, but discharge measurements date only from 1902 to the present. Additional main-stem Colorado and tributary gaging stations were established about 1905. Dependable records have been taken at Lees Ferry beginning in 1922. The Bureau of Reclamation developed natural flow tables at about a dozen locations in the upper basin, plus the Colorado River at Lees Ferry. Through correlation with recorded data, monthly flow values starting in October 1905 have been determined at all the stations. These monthly flow values, modified and routed through the system under present reservoir operation criteria, are the basis for the discharge-frequency analysis. The monthly natural flow values at Lees Ferry were also analyzed and unregulated frequency curves developed. These unregulated curves were used to estimate the magnitude of rare events beyond the period of record. Table A-1 lists the natural flow of values at Lees Ferry, which are 13 April 1977 data base values.

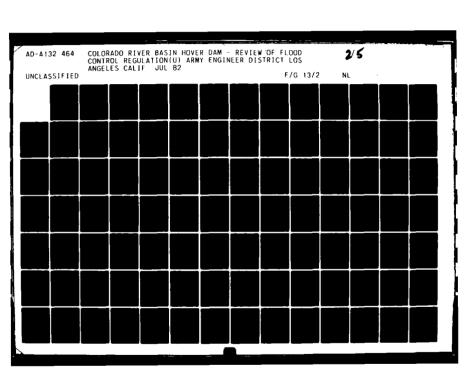



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1964 A

System Analysis

- 4. The modified monthly flow values for the period 1905-77 were routed through the Colorado River system by the Bureau of Reclamation using its CRSP Simulation Model. Basin development, diversions, and depletions were taken as average values estimated for 1980. Routing of the entire length of record using the same basin conditions provided flow values that would be expected to occur under 1980 conditions. The routings were performed for all nine alternatives studied. The reservoirs were assumed full to minimum flood control space (1.5 MAF) at the start of the period. The operating criteria and storage requirements for Hoover Dam and upper basin reservoirs for the nine alternatives are described The CRSP Simulation Model operates on a volume in the main report. basis with monthly flows adjusted for depletions, diversions, bank storage, and evaporation. These monthly outflow volumes were converted to monthly average flow rates in cubic feet per second. The outflow data was analyzed on the basis of annual maximum events. The operation for all alternatives was based on starting releases in August to obtain the required 1 January space. Table A-2 presents the regulated monthly Lake Mead historical inflow for 1980 conditions for alternative 1. The regulated inflow sequences vary with each alternative because of the different storage allocations, release steps, and the influence of these factors on upstream reservoir operation. Table A-3 presents the monthly Hoover Dam releases for the historical inflow record given in Table A-2 for alternative 1. Table A-4 summarizes the average monthly depletions and diversions applied to Hoover Dam releases in generating downstream flow data.
- 5. Analytical frequency analysis is not appropriate for watersheds altered by reservoirs. However, the natural flows at Lees Ferry were analyzed, and analytical frequency curves were developed.
- 6. The regulated monthly flows were ordered and plotted using median plotting positions according to the following equation:

$$P = \frac{(m - 0.3)}{(n + 0.4)} 100$$

where P is plotting position in percent or exceedance frequency in events per 100 years; m is the order number of the event; and n is the number of years of record.

- 7. A graphical best-fit curve was drawn through the plotted data. Plate A-1 shows the 1-, 6-, and 12-month curves for the Colorado River downstream from Hoover Dam for alternative 1.
- 8. Using median plotting positions and 72 years of record, the largest recorded event plots at about a 100-year exceedance interval. Since the graphical regulated curve does not have an established shape such as an analytical curve does, additional information is required to extend the curves. Balanced hydrographs developed from the natural unregulated curves at Lees Ferry were the basis for extending the regulated curves.

						F1	ow per mo	nth_	
Year	0ct	Nov	Dec	Jan	Feb	Mar	Apr	May	Ju
1906	458	382	245	227	245	618	1,263	3,9 60	5,
1907	730	477	351	289	387	788	1,621	3,155	6,
1908	678	364	267	319	357	669	1,142	1,750	3,
1909	558	375	308	375	309	720	1,192	3,716	7,
1910	737	492	371	361	423	1,391	1,863	3,582	3,
1911	620	427	368	378	438	917	1,002	3,016	4,
1912	1,133	442	353	346	327	538	909	3,749	6,
1913	628	533	305	354	314	524	1,851	3,310	3,
1914	657	538	330	370	401	876	1,605	4,737	6,
1915	955	525	334	304	397	527	1,502	2,493	3,
1916	535	411	343	394	424	1,395	1,813	3,817	4,
1917	1,396	496	369	260	352	507	1,544	3,804	7,
1918	483	447	403	356	374	656	900	2,806	5,
1919	551	496	410	287	317	653	1,427	3,293	2,
1920	368	405	394	407	602	685	981	5,961	6,
1921	528	596	405	414	457	948	935	4,241	8,
1922	463	416	453	351	439	907	1,185	4,757	5,
1923	311	401	400	375	340	449	1,318	3,895	5,
1924	737	646	424	313	507	509	1,669	3,347	3,
1925	370	392	275	262	403	609	1,402	2,562	2
1926	1,010	609	447	360	354	644	1,640	3,627	4,
1927	443	334	379	337	389	606	1,279	4,208	4,
1928	959	738	444	470	463	756	1,051	4,690	4,
1929	622	576	344	332	346	924	1,721	4,398	5
1930	9 50	568	437	299	485	576	1,838	2,291	3,
1931	571	428	289	264	367	431	627	1,509	2,
1932	531	359	253	273	557	675	1,703	4,411	4
1933	355	382	273	273	256	502	534	1,710	4
1934	417	303	334	308	303	365	610	1,555	
1935	188	183	229	255	274	341	708	1,676	4
1936	377	323	266	264	318	464	1,452	4,143	3
1937	369	448	317	200	414	702	1,588	3,965	3
1938	490	389	391	326	355	795	1,690	3,707	5
1939	605	485	411	348	300	811	1,289	3,005	1
1940	343	318	286	262	302	452	786	2,552	1

Notes: See footnotes at end of table.

Table A-1. Estimated natural flow for the Colorado River at Lees Ferry. (1,000 Acre-feet)

							ter
per mo						Year	Apr-July
Apr	May	June	July	Aug	Sep	total	total
1,263	3,960	5,083	2,758	1,410	1,430	18,077	13,064
1,621	3,155	6,119	4,747	1,883	903	21,450	15,642
1,142	1,750	3,132	1,851	1,171	583	12,287	7,880
1,192	3,716	7,375	3,843	1,775	1,451	21,997	16,127
1,863	3,582	3,055	1,307	679	574	14,835	9,808
1,002	3,016	4,097	2,244	911	564	14,982	10,358
909	3,749	6,159	3,155	1,275	639	19,025	13,972
1,851	3,310	3,150	1,931	791	699	14,389	10,241
1,605	4,737	6,293	3,051	1,308	779	20,944	15,685
1,502	2,493	3,663	2,049	748	546	14,044	9,707
	•	•					
1,813	3,817	4,756	2,558	1,826	799	19,072	12,944
1,544	3,804	7,791	4,882	1,525	811	23,737	18,021
900	2,806	5,373	2,244	882	700	15,622	11,323
1,427	3,293	2,593	1,448	843	535	12,854	8,761
981	5,961	6,980	3,086	1,293	619	21,782	17,007
935	4,241	8,477	2,779	1,888	938	22,607	16,433
1,185	4,757	5,733	2,096	1,054	641	18,516	13,790
1,318	3,895	5,104	2,969	1,672	1,013	18,249	13,287
1,669	3,347	3,776	1,589	631	397	14,544	10,381
1,402	2,562	2,845	1,954	1,005	1,186	13,267	8,763
1,640	3,627	4,065	1,891	864	460	15,970	11,223
1,279	4,208	4,054	3,029	1,202	2,124	18,385	12,570
1,051	4,690	4,316	2,191	955	560	17,593	12,249
1,721	4,398	5,481	2,710	2,276	1,778	21,509	14,311
1,838	2,291	3,772	1,595	1,804	707	15,322	9,495
627	1,509	2,059	1,009	613	444	8,611	5,205
1,703	4,411	4,248	2,638	1,255	691	17,594	13,000
534	1,710	4,723	1,825	735	577	12,145	8,792
610	1,555	973	626	479	301	6,573	3,763
708	1,676	4,760	2,145	907	613	12,278	9,289
	-	•	2,173	307	013		
1,452	4,143	3,407	1,579	1,220	731	14,547	10,582
1,588	3,965	3,004	1,844	773	617	14,241	10,401
1,690	3,707	5,366	2,412	882	1,082	17,882	13,175
1,289	3,005	2,304	960	532	698	11,749	7,558
786	2,552	2,212	893	482	551	9,438	6,443

						Fl	ow per mo		
.	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	
lear							~	E 204	
1941	720	415	366	356	430	676	1,147	5,394	,
1942	1,810	913	577	404	396	661	2,928	3,620	•
1943	346	378	369	345	345	539	1,673	2,580	
1944	380	451	379	285	344	515	1,073	3,714	
1945	356	383	308	33 0	359	430	811	3,257	
			200	348	314	516	1,175	2,117	
1946	528	435	320			667	884	3,685	
1947	430	479	424	265	353	625	1,753	4,129	
1948	820	582	441	377	432	695	1,408	3,583	
1949	347	404	350	328	351		1,312	2,390	
1950	535	482	364	348	395	641	1,312	2,390	
	200	358	424	308	357	423	601	2,152	
1951	390	451	340	491	386	436	2,344	5,655	
1952	421	431 376	374	402	365	466	572	1,381	
1953	348		343	318	342	394	735	1,850	
1954	304	426	2 9 0	255	253	591	716	2,053	
1955	562	361	290	233	233	372		-	
1956	197	275	335	380	280	524	1,036	2,935	
	162	304	258	295	331	510	876	2,858	
1957	756	838	503	392	537	689	1,614	4,686	
1958	306	359	368	306	314	351	492	1,489	
1959	545	517	351	290	315	755	1,785	2,095	
1960	343	317	32.					. 700	
1961	344	349	265	244	319	373	674	1,738	
1962	827	547	371	334	775	548	2,586	4,240	
1963	526	446	343	202	371	584	816	1,906	
1964	278	338	266	268	263	344	659	2,467	
1965	258	325	363	380	369	444	1,421	3,470	
1905						000	1 262	2,628	
1966	836	568	552	455	395	982	1,363		
1967	303	349	371	289	307	59 0	646	1,791	
1968	312	328	23 9	313	338	524	661	2,216	
1969	411	386	321	392	353	572	2,022	3,962	
1970	664	514	369	371	347	436	609	3,709	
		e	205	419	448	600	1,394	2,570	
1971	647	514	395	434	441	863	855	2,138	
1972	588	518	418	449	415	894	1,388	4,752	
1973	1,099	607	386	385	378	814	977	3,674	
1974	39 0	452	380	303	370	014		-,-	
	162	183	229	200	245	341	492	1,381	
MIN	1,810	913	577	491	775	1,395	2,928	5,961	
MAX	563	451	358	334	377	632	1,256	3,221	
MEAN	203	471	370	33 .			-		

Notes: Reference U.S. Geological Survey station number 938000. Table data as developed on

Table A-l (Continued)

						Water	
ow per						Year	Apr-July
Apr	May	June	July	Aug	Sep	Total	Total
1,147	5,394	4,620	2,375	1,133	711	18,343	13,536
2,928	3,620	4,891	2,003	812	432	19,448	13,442
1,673	2,580	3,361	2,020	1,143	625	13,723	9,633
1,073	3,714	4,819	2,490	. 783	361	15,594	12,095
811	3,257	3,433	2,424	1,395	516	14,004	9,925
1,175	2,117	2,802	1,270	79 0	474	11,086	7,362
884	3,685	3,834	2,614	1,522	79 0	15,948	11,018
1,753	4,129	3,951	1,587	828	387	15,912	11,420
1,408	3,583	5,157	2,720	895	437	16,673	12,868
1,312	2,390	3,818	1,929	709	428	13,352	9,450
601	2,152	3,724	2,070	1,085	520	12,410	8,547
2,344	5,655	6,222	2,261	1,170	699	20,875	16,482
572	1,381	3,923	1,598	956	398	11,160	7,474
735	1,850	1,385	1,143	594	508	8,342	5,113
716	2,053	2,367	1,115	851	354	9,766	6,250
1,036	2,935	3,533	1,058	634	301	11,488	8,562
876	2,858	6,724	4,834	1,951	1,018	20,124	15,293
1,614	4,686	4,577	1,219	620	452	16,882	12,095
492	1,489	2,804	1,323	695	332	9,138	6,107
1,785	2,095	3,230	1,235	522	328	11,968	8,345
674	1,738	2,519	853	670	888	9,235	5,784
2,586	4,240	3,886	2,411	792	412	17,729	13,123
816	1,906	1,822	835	629	749	9,227	5,378
659	2,467	3,006	1,591	873	365	10,716	7,723
1,421	3,470	5,635	3,719	1,528	898	18,810	14,245
1,363	2,628	1,933	951	515	357	11,537	6,876
646	1,791	3,659	2,072	827	507	11,712	8,168
661	2,216	5,064	1,625	1,429	417	13,464	9,566
2,022	3,962	3,044	1,942	799	616	14,819	10,970
609	3,709	4,182	1,944	845	1,142	15,132	10,445
1,394	2,570	4,592	2,101	811	531	15,020	10,657
855	2,138	3,835	1,108	538	469	12,206	7,936
1,388	4,752	4,992	2,675	924	597	19,179	13,807
977	3,674	3,422	1,420	604	285	13,182	9,494
492	1,381	973	626	479	285	6,573	3,763
2,928	5,961	8,477	4,882	2,276	2,124	23,737	18,021
1,256	3,221	4,161	2,093	1,021	667	15,135	10,731

le data as developed on 13 April 1977.

Water		Month								
year	0ct	Nov	Dec	Jan	Feb	Mar	Apr	May		
1906	1,581	1,546	1,619	1,643	625	582	751	966		
1907	1,787	1,550	1,623	1,646	696	998	1,203	1,472		
1908	1,687	1,550	1,624	1,623	527	510	518	551		
1909	568	560	944	1,647	527	768	967	1,212		
1 9 10	1,894	1,550	1,623	1,646	527	510	518	551		
1911	568	719	1,624	1,647	527	510	518	551		
1912	1,585	1,547	1,618	1,642	527	738	903	1,109		
1913	1,756	1,550	1,622	1,647	527	510	518	551		
1914	568	1,114	1,619	1,647	586	865	1,059	1,306		
1915	1,581	1,546	1,618	1,643	527	510	518	551		
1916	568	610	1,620	1,647	527	554	740	949		
1917	2,487	1,550	1,623	1,647	842	1,158	1,362	1,648		
1918	1,571	1,550	1,624	1,647	527	510	518	551		
1919	707	1,550	1,623	1,646	527	510	518	551		
192 0	568	560	856	1,649	609	923	1,124	1,376		
921	1,472	1,550	1,623	1,647	695	995	1,202	1,443		
1922	1,538	1,546	1,603	1,647	527	655	828	1,033		
1923	1,087	1,550	1,624	1,647	527	510	579	781		
1924	1,780	1,550	1,622	1,646	527	510	518	551		
1925	568	560	1,588	1,559	527	510	518	551		
1926	568	606	1,587	1,648	527	510	518	551		
1927	568	1,471	1,559	1,648	527	510	518	573		
1928	1,995	1,550	1,622	1,646	527	510	5 9 0	761		
1929	1,251	1,550	1,623	1,647	527	646	823	1,051		
1930	1,967	1,551	1,623	1,647	527	510	518	551		
1931	568	1,019	1,597	1,569	527	510	518	551		
1932	568	560	856	889	527	510	518	551		
1933	568	742	1,456	1,645	527	510	518	551		
1934	568	56 0	856	889	527	510	518	551		
1935	568	56 0	856	889	527	510	518	551		
1936	568	56 0	856	889	527	510	518	551		
1937	568	560	856	889	527	510	518	551		
1938	568	56 0	856	889	527	510	518	551		
1939	568	560	856	889	527	510	518	551		
194 0	568	560	856	889	527	510	518	551		
1941	568	560	856	889	527	510	518	551		
1942	568	560	1,625	1,647	527	510	518	583		
1943	593	1,527	1,534	1,648	527	510	518	551		
1944	568	560	856	1,497	527	510	518	551		
1945	568	1,332	1,509	1,648	527	510	518	551		
1946	568	560	1,460	1,648	527	510	518	551		

Table A-2. Regulated monthly Lake Mead historical inflow adjusted to 1980 conditions for alternative 1.

(1,000 Acre-feet)

i	Мот	nth						Water year
eb	Mar	Apr	May	June	July	Aug	Sep	total
2 5	582	751	966	1,270	1,707	1,058	1,005	14,353
P 6	998	1,203	1,472	1,572	2,501	1,987	767	17,802
27 27	510	518	551	585	1,045	1,012	350	11,582
<u> 7</u>	768	967	1,212	1,550	2,260	1,545	1,710	14,258
7	510	518	551	585	1,045	1,012	350	11,811
7	510	518	551	585	1,045	1,012	35 0	9,656
7	738	903	1,109	1,422	1,829	1,042	511	14,473
7	510	518	551	585	1,045	1,012	350	11,673
6	865	1,059	1,306	1,611	2,088	1,012	450	13,925
7	510	518	551	585	1,045	1,012	350	11,486
7	554	740	949	1,206	1,489	1,454	575	11,939
2	1,158	1,362	1,648	1,564	3,122	1,038	587	18,628
7 7	510	518	551	585	1,045	1,012	350	11,490
7	510	518	551	585	1,045	1,012	350	10,624
9	923	1,124	1,376	2,641	1,788	1,012	35 0	13,456
9 5 7 7 7	995	1,202	1,443	2,420	1,743	1,489	639	16,918
7	655	828	1,033	1 ,9 70	1,046	1,012	350	13,755
7	510	579	781	1,065	1,446	1,244	737	12,797
7	510	518	551	585	1,045	1,012	350	11,696
7	510	518	551	585	1,045	1,012	350	9,373
7	510	518	551	585	1,045	1,012	350	9,507
7	510	518	573	850	1,206	1,012	1,655	12,097
7	510	59 0	761	1,222	1,166	1,012	350	12,951
₽	646	823	1,051	1,702	1,548	1,706	1,504	15,578
7	510	518	551	585	1,045	1,012	350	11,886
7	510	518	551	585	1,045	1,012	350	9,851
P	510	518	551	585	1,045	1,012	609	8,230
7	510	518	551	585	1,045	1,012	350	9,509
7	510	518	551	585	1,045	1,012	609	8,230
	510	518	551	585	1,045	1,012	609	8,230
₽	510	518	551	585	1,045	1,012	609	8,230
	510	518	551	585	1,045	1,012	609	8,230
•	510	518	551	585	1,045	1,012	609	8,230
	510	518	551	585	1,045	1,012	60 9	8,230
	510	518	551	585	1,045	1,012	609	8,230
	510	518	551	585	1,045	1,012	609	8,230
	510	518	583	2,097	1,045	1,012	350	11,042
	510	518	551	585	1,045	1,012	350	10,400
	510	518	551	585	1,045	1,012	35 0	8,579
	510	518	551	585	1,045	1,012	35 0	10,155
	510	518	551	585	1,045	1,012	350	9,334
					•	-,		•

Water	Month										
year	0ct	Nov	Dec	Jan	Feb	Mar	Apr	May			
1947	568	560	856	889	527	510	518	551			
1948	568	560	1,625	1,648	527	510	518	551			
1949	568	1,262	1,525	1,648	527	510	518	551			
1950	1,074	1,551	1,583	1,648	527	510	518	551			
1951	568	560	856	1,348	527	510	518	551			
1 9 52	568	560	856	1,291	527	510	644	926			
1953	1,364	1,548	1,550	1,648	527	510	518	551			
1954	568	560	856	958	527	510	518	551			
1955	568	560	856	889	527	510	518	551			
1956	568	560	856	889	527	510	518	551			
1957	568	560	856	889	527	510	518	551			
1958	568	560	856	889	527	510	518	551			
1959	568	795	1,542	1,648	527	510	518	551			
1960	568	560	856	889	527	510	518	551			
1961	568	560	856	889	527	510	518	551			
1962	568	560	856	889	527	510	518	551			
1963	568	560	856	889	527	510	518	551			
1964	568	560	856	889	527	510	518	551			
1965	568	560	856	889	527	510	518	551			
1966	568	560	856	889	527	510	518	551			
1967	568	560	856	889	527	510	518	551			
1968	568	560	856	889	527	510	518	551			
1969	568	560	856	889	527	510	518	551			
1970	568	560	856	889	527	510	518	551			
1971	568	560	856	1,649	527	510	518	551			
1972	568	560	1,526	1,648	527	510	518	551			
1973	568	560	856	1,414	527 527	510	527	749			
1974	1,092	1,551	1,624	1,648	527	510	518	551			
1975	568	560	1,405	1,649	527 527	510	518	551			
1976	866	1,548	1,625	1,648	527	510	518	551			
1977	568	560	856	889	527	510	518	551			

Table A-2 (Continued)

						***************************************	Water
	nth					 	Year
Mar	Apr	May	June	July	Aug	Sep	total
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	350	9,499
510	518	551	659	1,597	1,012	350 350	10,727
510	518						
510	518	551 551	585 585	1,045 1,045	1,012 1,012	350 350	10,954 8,430
510	644	926					11,055
			2,680	1,131	1,012	35 0	
510	518	551	585	1,045	1,012	350 540	11,208
510	518	551	585	1,045	1,012	540	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	964	1,045	1,012	350	8,350
510	518	551	585	1,045	1,012	350	9,651
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	60 9	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	60 9	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	585	1,045	1,012	609	8,230
510	518	551	974	1,045	1,012	350	9,120
510	518	551	585	1,045	1,012	350	9,400
510	527	749	2,449	1,741	1,012	350	11,263
510	518	551	585	1,045	1,012	350	11,013
510	518	551	585	1,045	1,012	350	9,280
510	518	551	585	1,045	1,012	350	10,785
510	518	551	585	1,045	1,012	609	8,230

Water						Month		
year	0ct	Nov	Dec	Jan	Feb	Mar	Apr	May
1006	1 101			1 (0)				
1906	1,134	1,175	1,143	1,691	1,054	1,168	1,131	1,168
1907	1,366	1,338	1,244	2,152	1,554	1,722	1,347	1,199
1908	1,577	1,236	1,161	1,416	612	869	980	914
1909	489	489	561	1,722	1,554	1,722	1,347	1,199
1910	1,666	1,666	1,312	920	604	1,046	988	930
1911	482	481	623	1,434	887	988	988	930
1912	1,217	1,195	1,183	1,691	1,092	1,722	1,131	948
1913	1,292	1,376	1,142	1,039	945	1,046	986	927
1914	480	480	806	1,722	1,554	1,722	1,408	1,250
1915	1,711	1,405	1,255	1,164	648	867	985	928
1916	479	932	1,117	1,691	1,202	1,168	1,131	928
1917	1,666	1,532	1,135	2,152	1,943	1,722	1,666	1,168
1918	1,098	1,206	1,188	1,168	887	1,046	986	927
1919	480	479	923	1,158	601	868	986	927
1920	480	479	551	1,722	1,610	1,722	1,666	1,168
1921	1,094	1,301	1,129	2,152	1,221	1,722	1,347	1,168
1922	1,165	1,274	1,359	1,691	1,160	1,168	1,467	1,168
1923	995	1,205	1,268	1,275	1,054	1,168	1,131	1,168
1924	1,427	1,468	1,270	911	600	1,046	984	927
1925	479	478	695	1,276	600	867	985	927
1926	479	478	550	1,168	887	1,168	984	927
1927	478	478	550	1,168	1,054	1,168	1,049	927
1928	1,486	1,487	1,204	1,144	1,092	1,168	1,109	926
1929	478	762	1,066	1,691	1,160	1,722	1,131	926
1930	1,666	1,597	1,232	519	600	1,105	984	926
1931	478	478	781	1,163	600	866	984	926
1932	478	478	550	520	600	866	984	926
1933	478	478	549	573	600	866	984	926
1934	478	478	549	520	600	866	984	926
1935	478	478	549	520	600	866	984	926
1936	478	478	549	520	600	866	984	925
1937	475	476	547	519	600	864	982	923
1938	474	474	546	517	598	863	981	922
1939	474	474	476	517	598	863	917	865
1940	405	403	546	517	598	863	981	865
1941	405	403	476	517	598	863	981	921
1942	474	474	546	1,168	773	929	980	921
1943	474	474	546	1,087	598	863	981	921
1944	474	474	546	1,168	860	863	981	921
1945	474	474	546	597	597	863	981	921
1946	474	474	546	1 44	597	863	1,002	921

Table A-3. Monthly releases from Lake Mead based on the historical record adjusted to 1980 conditions for alternative 1.

(1,000 Acre-feet)

							Water
Month							year
Mar	Apr	May	June	July	Aug	Sep	total
1,168	1,131	1,168	794	848	874	1,560	13,740
1,722	1,347	1,199	1,131	867	1,722	1,666	17,308
869	980	914	773	830	719	627	11,714
1,722	1,347	1,199	1,131	867	1,722	1,666	14,469
1,046	988	930	811	864	746	685	12,238
988	988	930	811	864	746	685	9,919
1,722	1,131	948	811	864	918	1,151	13,923
1,046	986	927	810	862	744	655	11,823
1,722	1,408	1,250	1,131	862	1,722	1,422	14,559
867	985	928	809	861	787	667	12,087
1,168	1,131	928	810	862	1,722	1,302	13,344
1,722	1,666	1,168	1,131	862	1,123	1,167	17,247
1,046	986	927	810	862	744	657	11,579
868	986	927	810	863	744	656	9,495
1,722	1,666	1,168	1,666	863	1,115	1,180	14,222
1,722	1,347	1,168	1,131	863	1,265	1,224	15,615
1,168	1,467	1,168	809	862	1,263	1,169	14,555
1,168	1,131	1,168	809	862	744	656	12,335
1,046	984	927	810	862	744	656	11,705
867	985	927	809	862	744	656	9,378
1,168	984	927	80 9	862	743	655	9,710
1,168	1,049	927	809	861	743	1,666	10,951
1,168	1,109	926	809	861	743	654	12,683
1,722	1,131	926	809	861	1,012	1,666	13,284
1,105	984	926	809	861	743	654	11,096
866	984	926	809	861	743	654	9,343
866	984	926	809	861	742	654	8,468
866	984	926	809	861	742	654	8,520
866	984	926	809	861	742	654	8,467
866	984	926	808	860	742	654	8,465
866	984	925	808	860	742	654	8,464
864	9 82	923	804	856	738	65 9	8,434
863	981	922	745	799	737	649	8 ,3 05
863	917	865	744	799	681	591	7,999
863	981	865	744	799	681	59 0	7,992
863	981	921	802	855	737	648	8,206
929	98 0	921	802	855	737	648	9,307
863	981	921	802	855	737	648	8,986
863	981	921	802	855	737	648	8,855
863	981	921	802	855	737	648	8,495
863	1,002	921	802	855	737	648	8,963

Water							nth	
year	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May
1947	474	474	546	517	598	863	1,002	921
1948	474	474	546	855	919	988	981	921
1949	474	474	546	1,168	1,054	929	1,049	921
1950	474	474	546	1,198	598	863	981	921
1951	474	474	546	517	598	863	981	921
1952	474	474	546	1,168	1,092	1,168	98 0	921
1953	474	474	9 20	1,588	598	863	1,002	921
1954	474	474	546	517	598	863	981	921
1955	474	474	546	517	598	863	981	921
1956	405	403	546	517	598	863	981	921
1957	474	474	546	517	598	863	981	865
1958	405	403	546	517	598	863	981	865
1959	405	403	546	517	598	863	981	921
1960	474	474	546	517	598	863	981	921
1961	474	474	546	517	598	863	981	865
1962	405	403	476	517	598	863	981	865
1963	405	403	476	447	598	863	917	865
1964	405	403	476	447	598	794	917	865
1965	405	403	476	447	598	863	917	865
1966	405	403	476	447	598	863	917	865
1967	405	403	476	517	598	863	917	865
1968	405	403	476	517	598	863	981	865
1969	405	403	476	447	598	863	981	865
1970	405	403	476	517	598	863	981	865
1971	405	403	476	517	598	863	981	921
1972	405	403	546	517	598	863	981	921
1973	474	474	546	1,168	717	1,168	989	922
1974	474	474	893	1,663	945	863	981	921
1975	474	474	546	1,168	1,054	929	1,049	921
1976	474	474	546	1,244	598	863	981	921
1977	474	474	546	517	598	863	981	921

Table A-3 (Continued)

							Water
Month							year
	Apr	May	June	July	Aug	Sep	total
l	,002	921	802	855	737	648	8,437
	981	921	802	855	737	ь48	9,200
1	,049	921	802	855	737	648	9,865
	981	921	802	855	737	648	8,997
	981	921	802	855	737	648	8,416
	980	921	802	855	737	648	9,865
1	,002	921	802	855	737	648	9,882
	981	921	802	855	737	648	8,416
	981	921	802	855	737	648	8,416
	981	921	802	855	737	648	8,276
	981	865	744	799	681	5 9 0	8,132
	981	865	744	799	681	648	8,050
	981	921	802	855	737	648	8,276
	981	921	802	800	737	648	8,361
	981	865	744	799	720	5 9 0	8,171
	981	865	744	800	681	59 0	7,923
	917	865	743	799	681	59 0	7,787
	917	865	744	799	681	5 9 0	7,719
	917	865	744	799	681	59 0	7,788
	917	865	744	799	681	5 9 0	7,788
	917	865	744	799	681	590	7,858
	981	865	744	799	681	5 9 0	7,922
	981	865	744	799	681	59 0	7,852
	981	865	744	799	681	5 9 0	7,922
	981	921	744	799	681	590	7,978
	981	921	802	855	737	648	8,276
	989	922	802	855	737	648	9,500
	981	921	802	855	737	648	10,256
1,	,049	921	802	855	737	648	9,657
•	981	921	802	855	737	648	9,143
	981	921	802	855	737	648	8,416

Table A-4. Net average monthly depletions and diversions from the Lower Colorado River.

*

		Net diversions by reach (units of 1,000 acre-feet	reach (units of	1,000 acre-feet	
	Hoover Dam	Parker Dam	Palo Verde Dam	Yuma	[]]]
Month	ಭ	to	Ş	ಭ	Monthly
	Parker Dam	Palo Verde Dam	Yuma	Morelos Dam	total
Oct	17	38	225	96	373
Nov	10	29	174	25	265
Dec	21	30	180	116	347
Jan	28	38	225	88	379
Feb	χ <u>.</u>	11	544	154	744
Mar	26	92	450	205	787
Apr	53	81	614	56 ⁴	877
May	9	83	495	141	768
June	617	88	523	132	792
July	32	91	240	234	897
Aug	42	83	495	157	759
Sep	7₹	99	392	100	582
Total					
annua 1	392	744	4,422	1,742	7,300

Net average monthly depletions and diversions include evaporation, bank storage, diversions, and return flows for average 1980 conditions. Note:

- 9. The 69 years of natural flow data at Lees Ferry were analyzed based on a Pearson Type III distribution with log transformation of the data (log-Pearson Type III distribution). The mean, standard deviation and the skew coefficient of the station data were computed for durations of 1, 3, 5, 7, and 12 months. Generalized skew coefficients that provided the best fit of the data and resulted in a consistent set of curves were adopted. The analytical curves with data plotted by median plotting positions are shown on plate A-2. Also listed on the plate are the statistics of the natural flow data.
- 10. BALANCED HYDROGRAPHS. A "balanced hydrograph" is defined herein as a hydrograph that conforms to a specified set of volume-duration values. The volume-frequency curves from plate A-2 were used to provide the volume-frequency values to generate a set of balanced hydrographs. Annual hydrographs for exceedance intervals of 200, 250, 333, 500, and 1,000 years were generated using the mean calendar monthly flows as a pattern hydrograph. The annual hydrographs were depleted to average 1980 conditions and routed through Hoover, Davis, and Parker Dams for the nine alternatives. The routed outflow values were plotted at the same frequency as the inflow balanced hydrographs. This data, shown plotted on plate A-1 for alternative 1, was used to determine the upper end of the frequency curves.
- 11. The frequency curves developed are based only on main-stem flows from Hoover Dam and do not include any contribution from the tributary drainage area downstream from Hoover Dam. The differences in the curves for reaches are the result of storage in Lake Havasu and net diversion from the river. The maximum 1-month frequency curves for the five reaches of the river for alternative 1 are shown on plate A-3. The same type of relationship holds for the other alternatives. Discharge-frequency values for the maximum 1-month duration and for the five reaches covering the nine alternatives are listed in table A-5.

COLORADO RIVER STORAGE PROJECT SIMULATION MODEL

12. The Colorado River Storage Project (CRSP) Simulation Model is an outgrowth of the experience gained over the years since 1965 in an attempt to duplicate the hand operation studies that were the basis for both the planning and the operating of the Colorado River Storage Project.

Table A-5. Maximum 1-month discharge frequency values in ft^3/s .

Return				Flood c	Flood control alternative	ernative			
period in years		5	3	#	5	9	7	∞	6
			Ноо	Hoover Dam to Parker Dam	Parker Da	æ			
1,000 500 333 200 100 50	62,000 53,000 40,000 40,000 35,000	56,700 46,200 40,000 40,000 35,000	47,500 45,000 45,000 45,000 35,000	100,300 88,800 75,200 56,500 29,000	65,400 62,500 62,100 42,900 35,000	62,500 62,500 52,400 40,000 35,000	50,000 50,000 50,000 45,000 35,000	#0,000 #0,000 #0,000 #0,000	50,000 50,000 45,800 42,400 35,000
25 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	31,000 28,000 27,100 18,700	32,000 28,000 27,100 17,800	<u> </u>	28 28 28 28 18 18	,300 31,000 31,000 28,000 28,000 27,700 17,700 18,	31,500 28,000 27,000 18,000	31,300 28,000 27,300 17,700	28,000 28,000 19,000	31,000 28,300 28,000 18,500
1,000 500 333 200 100 50 10 5	61,800 52,300 39,000 37,700 32,100 29,000 26,300 15,700	56,700 46,200 39,000 37,700 32,000 29,000 26,000	47,500 44,000 42,700 42,200 32,300 32,000 28,500 24,300	99,400 87,800 74,200 56,500 28,000 27,800 26,100 26,100	64,400 62,500 62,100 42,900 32,100 32,000 30,000 26,300 24,300	62,500 62,500 52,400 39,000 32,300 32,000 29,000 25,700	47,700 47,700 47,700 42,000 32,300 32,100 28,500 25,700 24,300	39,000 39,000 37,700 37,100 28,000 28,000 27,000 26,000	47,700 47,700 43,000 41,400 32,000 32,000 28,000 26,300 24,000

Note: See footnote at end of table.

Table A-5 (Continued)

period in years 1,000 6 500 5	-								
		8	m	ন	S	9	7	ω	6
			Headgate	Headgate Rock Dam to Imperial	to Imperia	al Dam			
	60,300	55,200	000, 94	97,900	62,900	61,000	46,500	37,500	46,500
	50,800 37,500	37,800	42,500	86,300	61,000	50,000	#6,500 #6,500	36,500	30 000
	36,500	36,500	41,500	55,000	41,400	37.500	41,300	36,500	39,900
	31,500	31,600	31,600	26,700	31,400	31,500	31,500	26,700	31,400
20	31,400	31,400	31,500	26,500	31,300	31,300	31,500	26,600	31,400
	28,500	28,000	27,700	26,400	28,500	28,300	28,000	25,500	27,300
	25,000	24,700	24,400	25,000	25,000	24,500	24,900	25,000	25,300
	23,800	23,700	23,900	23,800	23,700	23,800	23,900	24,300	23,800
	14,500	14,500	14,400	14,700	14,700	14,700	14,700	15,100	14,700
			Imper	Imperial Dam to Morelos Dam	Morelos	Dam			
	51,500	46,400	37,800	89,100	54,100	52,200	42,800	32,800	42.800
	42,000	35,900	37,800	77,500	52,200	52,200	42,800	32,800	42,800
333	32,800	32,800	37,800	63,900	51,800	42,100	42,800	32,800	38,700
	32,800	32,800	37,800	46,200	32,600	32,800	36,900	32,800	31,100
	27,800	27,800	27,900	21,400	27,900	27,900	27,900	21,200	27,700
	27,700	27,700	27,900	21,400	27,800	27,700	27,800	21,000	27,700
	27,600	26,000	26,000	20,900	27,000	26,500	26,000	20,700	26,000
	20,500	20,600	20,600	20,700	20,700	20,700	20,700	20,700	20,600
	20,000	20,000	20,000	20,600	20,500	20,100	20,100	20,100	20,500
	11,000	11,000	11,000	11,000	10,700	11,300	11,300	11,600	11,300

Note: See footnote at end of table.

Table A-5-(Continued)

Return				Flood c	control alternative	ernative			
period in years	-	2	<u>۳</u>	য	5	9	7	ω	6
			Immediately	/ downstream	from	Morelos Dam			
1,000	47,800			86,900		004.84			
200	39,800	32,100	36,400	75,300		48,400			
333	31,400	-		61,700		38,400			
200	31,400	_		42,500		31,400			
9	26,500			20,600		29,000			
20	26,500	_		20,500		26,400			
25	26,500	•		20,000		26,400			
10	19,500	_		19,700		19,500			
5	18,500	_		19,700		18,700			
7	9,500			9,500	9,500	9,500	10,400	10,200	9,500

The discharge frequency values presented are based upon releases from Lake Meade and do not take into account tributary inflows to the river downstream from Lake Meade. Note:

- 13. The program performs a synthetic operation for all Colorado River reservoirs for all months in exactly the same way because only a certain number of factors influence the operation of a reservoir. These factors, as given below, are described in the following paragraphs.
 - Inflow
 - Evaporation
 - Bank storage loss
 - Minimum allowable content
 - Maximum allowable content
 - Minimum allowable release (includes flood control, fish and wildlife, etc.)
 - Maximum allowable release
 - Releases other than those going downstream
 - Desired operation

These factors come into the computational procedure directly from values recorded on cards or magnetic tape, constants and equations that are an integral part of the program, or data on cards or tape reworked by the program.

Inflow

14. For Fontenelle, Flaming Gorge, Blue Mesa, Navajo, and Glen Canyon Dams, 1968-modified (virgin flows adjusted to the 1968 level of use in the basin) unregulated monthly flows at site are input and adjusted by the program to the present level of use in the year in the future they are to represent; that is, 1906 = 1978, 1907 = 1979, 1908 = 1980* * *. Morrow Point, Crystal, and Hoover historical side inflows are also input and adjusted by the program for additional depletion, depending on the year in the future they are to represent. Davis average net side inflows are input and used directly in the program without adjustment. Parker average net side inflows are input and adjusted by the program for additional depletions and salvage, depending on the year in the future they are to represent.

Evaporation Losses

15. Net evaporation, computed by the program generally using polynomial equations, is used for all upper basin reservoirs. Lake Mead estimated evaporation is based on an annual rate of 6.5 acre-feet of loss per

exposed acre of water surface. (The net figure used for side inflow, which is based on historical gains and losses below Hoover Dam, takes into account Parker and Davis evaporation losses.)

Bank Storage Losses

16. For all upper basin reservoirs, 10-percent surface storage change is used for bank storage change, with the exception of Glen Canyon where 15-percent is used. For Lake Mead, the net figure used for side inflow takes into account 6-1/2-percent surface storage losses.

Minimum Allowable Content

17. Minimum allowable content, as used in the program, is the minimum powerpool content.

Maximum Allowable Content

18. Maximum allowable content is the maximum allowable excluding surcharge.

Minimum Allowable Release

19. All upper basin reservoirs have a pattern of minimum allowable releases that are input data. These releases are based on demands for fish and wildlife, recreation, irrigaton, power, and other requirements. Under certain conditions, the program revises this input pattern to allow for minimum flood control and conservation requirements that are functions of reservoir stages, time of year, and expected inflows. In accordance with regulations published by the U.S. Army Corps of Engineers, Los Angeles District, as revised November 1968 (report) and June 1977 (field agreement), the program computes minimum Lake Mead releases for Hoover Dam flood control during flood control operations. Also, the program can adjust the minimum monthly Glen Canyon releases to enhance fish propagation at Lake Mead.

Maximum Allowable Release

20. Maximum allowable release is computed as the amount of water that can pass through the power plant at 90-percent plant factor. When the power plant is not available for use or when other conditions prevail (that is, flood control operations), the outlet works and spillway can be used to bypass additional water.

Releases Other Than Those Going Downstream

21. Releases from within the reservoirs (Navajo, Mead, and Havasu) are an input item not adjusted by the program.

Desired Operation

- 22. Input data may impose an operation procedure on the reservoirs of the system. Releases from Parker Dam are always input. If the input data does not specify an operating criteria, the program determines a mode of operation that tends to optimize power production on the reservoirs of the upper basin. The demand for water at Parker Dam, which is adjusted by the program as a function of Lake Mead elevation, governs the operation of the lower basin reservoirs.
- 23. In actual operation, the program operates up to 14 reservoirs of the system in downstream order. The limitation of machine size allows only 24 sequential months to be stored within the machine; however, by stacking the data, the program is able to process studies of almost unlimited length.
- 24. Monthly reservoir data is output for each reservoir in the system. An annual summary of reservoir data and power output is printed out at the end of each water supply period.

Application of CRSP Model

- 25. The CRSP model was applied in two different ways to generate a regulated flow record downstream from Hoover Dam. For discharge-frequency and flood damage determinations, a single sequence consisting of the historical flow record 1906 to 1977 was run under 1980 depletion levels assuming that the reservoir system was full-to-minimum flood control storage requirements at the beginning of the record.
- 26. For determinations of end-of-period reservoir system storage, hydropower generation, and salinity levels, the CRSP model was run using thirteen 10-year sequences with depletion levels varying as projected from 1977 to 1987. The benefits and costs accruing to water conservation, hydropower, and salinity were then taken as the average results of the 13 sequences. At the start of each sequence run, the reservoir system was assumed to be at the actual 1977 storage levels.
- 27. An additional important consideration in the application of the CRSP model relates to how the model operates Hoover Dam utilizing a forecasted inflow. The flood control regulations specify that releases will be based on the maximum of the forecast, which is defined as the estimated inflow volume in acre-feet that, on the average, will not be

exceeded 19 times out of 20. The CRSP model computed the maximum forecasted inflow volume for each monthly forecast as the sum of the actual observed inflow volume plus the appropriate error component. The following tabulation summarizes the monthly error components as derived from the Bureau of Reclamation Lake Mead inflow forecast procedure.

Month	Lake Mead inflow (In. of acre-feet)
January	4.0
February	3-4
March	3.2
April	2.5
May	1.5
June	1.0
July	0.3

It should be recognized that the resulting inflow record upon which Hoover flood control releases are based tends to force releases early in the runoff season (say January through March) because the highest error components are in those months. This approach, however, was retained because the alternative of determining maximum, mean, and minimum forecasts for upper Colorado River reservoirs plus Hoover Dam for the entire period of record (1906 to 1977), based on current runoff forecasting techniques, was simply not feasible. Hence, actual operation of Hoover Dam should show that the distribution by month of high flood control releases is more uniform than study simulations indicate.

HYDRAULICS

28. The Hydraulics Section, Los Angeles District, between April 1977 and March 1978, conducted detailed overflow studies for four reaches of the Colorado River in the vicinity of Needles, Parker, Blythe, and Yuma. The hydraulic computer models generally covered the areas between the existing river levees, so that, when the discharge remained between these limits, the results are reliable. For the large flood discharges where flow breaks out of the existing river system, however, the results are approximate and should be used only for economic analysis. Overflow limits were plotted on topographical mapping (where 1 in. = 100 ft.), based on aerial photos taken in July 1977 for the Corps of Engineers. The following paragraphs describe the hydraulic analyses for the four study reaches.

Needles

29. Water-surface profiles and overflow maps for discharges ranging between 20,000 and 100,000 $\rm ft^3/s$ were developed for a 6-mile reach of the Colorado River in the vicinity of Needles, California. (See pl. A-4.) The HEC-2 backwater program was used to develop water-surface

- profiles between the existing river levees. The 1977 topographic mapping supplemented the cross sections surveyed by the Bureau of Reclamation in June 1975. To estimate overbank elevations for the very large floods, U.S. Geological Survey (USGS) quadrangle maps were used.
- 30. The Manning's roughness coefficients were based on field investigations and aerial photos. A channel "n" value of 0.030 was used. Overbank "n" values varied from 0.05 to 0.10. Very high "n" values of 0.20 and 0.25 were used in areas that were heavily obstructed by trailers and other structures.
- 31. For flood levels below the top of the levee, the starting-water-surface elevations were taken from a Bureau of Reclamation profile developed for this reach of the Colorado River. Elevations from this profile at river mile 243.0 agreed within 0.1 foot with the backwater run from Lake Havasu to the downstream limit of this study reach done by the Bureau's Hydrology Section. It was determined that floodflows would overtop the Arizona levee near river mile 243.9 for discharges of 73,000 and $100,000 \, \mathrm{ft}^3/\mathrm{s}$. The maximum starting-water-surface elevation was set at 1 foot above the existing levee on the Arizona side of the river.
- 32. Within the study reach there is one existing bridge at river mile 244.4 and another bridge under construction at river mile 246.1. Because the existing bridge was scheduled to be removed upon completion of the new bridge in July 1978, only the new bridge was considered in the backwater run. Two feet of debris were assumed on each side of the bridge piers.
- 33. Flood profiles were developed based on the assumption that the water would be contained within the levees. However, the $100,000~\rm{ft}^3/\rm{s}$ discharge overtops the Arizona levee at river mile 248 by about 1 foot. At several other locations the freeboard is less than 0.5 foot. The $100,000~\rm{ft}^3/\rm{s}$ discharge could also probably overtop the levee upstream from the study limit. Once a break occurs, most likely the entire historical flood plain would be inundated because the ground slopes away from the river. The water depths in this wide overflow area were determined by using HEC-2 backwater runs upstream from Topock Gorge. The Arizona levee upstream from river mile 244.9 contains the 73,000-ft³/s discharge. Studies by the Bureau of Reclamation indicate that flow would not overtop the Arizona levees upstream from the study reach for this discharge.
- 34. It was determined, however, that a discharge of $73,000 \text{ ft}^3/\text{s}$ would overtop the California levee at river mile 247.0 and flow into the City of Needles. Therefore, a weir analysis was done to determine the quantity of this flow. Since field investigations showed that the levee had been raised about 1 foot above the elevations shown on the topography, this increase in levee height was included in the breakout analysis. Downstream from the new bridge at river mile 246.1, it was also determined that a discharge of $73,000 \text{ ft}^3/\text{s}$ would overtop the levee

on the California side. These two breakout flows combined would cause floodwaters to pond in Needles to the same elevation as the water surface in the Colorado River.

- 35. Between Needles and Topock Gorge, the Colorado River has significant sediment deposition. Although the Bureau of Reclamation carries on a dredging program in this reach, the river channel cannot convey the 73,000- or 100,000-ft 3 /s discharges. The study showed that the levee system, under existing channel conditions, would carry 50,000 ft 3 /s. The Bureau of Reclamation, however, is not confident that it can maintain a channel capacity greater than 40,000 ft 3 /s in this reach during flood stages. The assumption was made, therefore, that discharges greater than 40,000 ft 3 /s would break out of the levee causing extensive ponding on the Arizona side of the river. The watersurface elevations were determined by using the result of an HEC-2 backwater run upstream from Topock Gorge.
- 36. Overflow delineations were made on USGS orthophoto maps, Corps of Engineers topographic maps, and San Bernardino County topographic maps made from 1963 aerial photos. Overflow limits for all floods were plotted on the Corps of Engineers (1-in. = 100-ft-scale) mapping. Overflow limits in the City of Needles plotted on the San Bernardino County (1-in. = 200-ft-scale) topographic maps show that Needles would be flooded by the 73,000- and 100,000-ft³/s events. The USGS orthophoto maps were used to show delineations for the 50,000-ft³/s-and-greater discharge events. Overflow limits for selected floods near Needles are shown on plate 2 of the main report.

Parker Strip

- 37. Water-surface profiles for several flood discharges ranging from 18,000 to 100,000 ft 3 /s were developed for a 14.5-mile reach of the Colorado River between Parker and Headgate Rock Dams. (See pl. A-5.) The HEC-2 backwater program was used to do the hydraulic calculations. Cross sections surveyed by the Bureau of Reclamation in January 1971 were supplemented by the 1977 topographic mapping.
- 38. The channel roughness coefficient was based on the rating table for the gaging station below Parker Dam. HEC-2 backwater model runs for discharges ranging from 10,000 to $24,000~\rm{ft}^3/\rm{s}$ were made using various channel "n" values. Comparison of results of these runs with rating curves permitted selection of an "n" value of 0.034. It was assumed that the "n" value would vary to a minimum value of 0.030 as the stage increased. A constant value of 0.070 was assigned to overbank areas.
- 39. The Bureau of Reclamation and the Bureau of Indian Affairs have determined that the Headgate Rock spillway gates are capable of maintaining a constant water-surface elevation of 364.4 feet upstream from the dam for all discharges below 100,000 ft³/s. This elevation was used as the starting-water surface for all the HEC-2 runs.

40. Computed overflow limits for selected flows through Parker Strip are delineated on plate 3 of the main report. Overflow limits for these and other floods are also delineated on 1-in. = 100-ft topographic maps on file in the Los Angeles District.

Blythe

- 41. An overflow study, conducted for several discharges ranging from 10,000 to 150,000 ft³/s, covered about 14.4 miles of the Colorado River in the vicinity of Blythe, California. The study reach extended from river mile 116.5 near 22nd Avenue to river mile 130.9 near 2nd Avenue. The HEC-2 backwater program was used to do the hydraulic computations east of the F-canal, whereas overflows from the very large floods were analyzed independently. Field surveys by Corps of Engineers surveyors in overbank areas supplemented the cross sections surveyed by the Bureau of Reclamation in July 1977 and the topographic mapping by the Corps of Engineers in 1977.
- 42. USGS quadrangle maps were used to extend cross sections in some overbank areas, and also to determine overflow limits of the very large floods.
- 43. Existing improvements that affect flooding in the Blythe area include extensive river-training structures, bank protection, and levees that are part of an extensive irrigation network in the Palo Verde Valley. In this reach, the Bureau of Reclamation has done the major channel improvement work, which consists primarily of earthfill training structures and bank protection riprap designed to prevent future meandering of the river. These improvements are not flood protection measures, and will be overtopped by large floods. Crisscrossing the overbank area are irrigation canals and drainage ditches. The canals, which are typically 5 feet above the ground, will serve as effective barriers to shallow overbank flooding. Drainage ditches typically have minimal capacity at road crossings, and therefore, have little ability to convey floodflows.
- 44. The Manning's roughness coefficients were based on field investigations. A channel "n" value of 0.030 was used. Overbank "n" values range from 0.05 in cultivated areas to 0.10 in heavy brush areas.
- 45. Starting-water-surface elevations were determined using the normal-depth (slope-area) method. The backwater run was started at river mile 113.7, which is about 3 miles downstream from the downstream study limit. This procedure was intended to account for any unknown backwater conditions downstream from the study's starting point. (See pl. A-6.)
- 46. The cross sections for the HEC-2 model extend from the Arizona bluff line on the left side of the flood plain to the F-canal level on the right overbank. The Bureau of Reclamation, in its flood plain information report, states that the F-canal would effectively contain

the levee design flood of 75,000 $\rm ft^3/s$. The Corps of Engineers followed this same limit for flows below the levee design flood. For larger floods, the criteria used was that canal levees would fail when the depth of the floodwaters against them exceeded 3 feet.

Overflow delineations were made on USGS orthophoto maps and on the Corps topographic maps. These overflow areas accounted for flooding from the Colorado River only, and do not include flooding from the tributaries and local runoff. The backwater run determined that the river channel would contain discharges of 28,000 ft³/s and below. A discharge of 38,000 ft³/s would overtop the river training structures in some places, but would not damage any agricultural land or structures. For discharges of 48,000 and 71,000 ft³/s, flow would leave the channel but would be contained by the F-canal; however, for discharges of 100,000 and 150,000 ft 3 /s, the F-canal would fail. The location of where the inital break point would occur is unpredictable, but the levee would probably break at several locations. After breaking, the F-canal floodwaters would travel in a southwesterly direction until they hit another canal. The water would then pond behind the levee until it too was breached. The breakout would continue in this manner across the entire Palo Verde Valley. Depths were assigned based on distance from the river channel, heights of levees, topography, and probability of ponding, which is based on the configuration of levee alinements. The analysis used for overflows that breach the F-canal is deemed adequate for economic studies, but would not be appropriate for flood protection works or flood insurance studies. Delineations of overflow limits for selected floods in the vicinity of Blythe are shown on plate 5 of the main report.

Yuma


- 48. Water-surface profiles and overflow maps for flows ranging between 5,000 and 150,000 ft³/s were developed for a 9-mile reach of the Colorado River in the vicinity of Yuma, Arizona. (See pl. A-7.) The HEC-2 backwater program was used to develop water-surface profiles between the existing river levees. Cross sections, provided by the International Boundary and Water Commission and taken in late 1976 and early 1977, were extended using the 1977 Corps of Engineers' topographic mapping. USGS quadrangle maps were used to estimate depths outside the river levees.
- 49. Extensive stands of well-established vegetation currently exist along the banks of the Colorado River in this reach. Upstream flood control and diversion works have prevented large flows from cleaning out the river channel for many years. Because of the lack of historical gage data for significant flood discharges, judgment is needed in choosing appropriate Manning's roughness coefficients. In this study the channel "n" value was varied with the water depth. The low-flow channel was assigned an "n" value of 0.030. Most of the vegetation is located on a natural bench between the low-flow channel and the natural river bank. For flow depths less than 5 feet on this

- bench, the average channel "n" value was varied between 0.035 and 0.050, depending on the thickness of the vegetation. A sensitivity study to test the effect of lowering the average channel "n" value to 0.025 disclosed that the average difference in water-surface elevation was 1.4 feet for discharges of 38,000 and 140,000 ft³/s. Overbank "n" values were 0.050.
- 50. The starting-water-surface elevations were taken from a rating curve developed from Bureau of Reclamation water-surface profiles at river mile 18.4. A normal-depth rating curve was also developed at river mile 18.4 and compared with the starting-water-surface elevations. Background runs showed that the difference in starting-water-surface elevations would cause insignificant differences in calculated water-surface elevations at river mile 22.0, the downstream limit of study.
- 51. Four bridges and a diversion dam influence water-surface computations in the study reach. Bridge pier losses at the Fourth Street and Interstate 8 bridges were modeled from plans supplied by the California Department of Transportation. Plans from the Office of Indian Affairs established elevations and dimensions for the First Street bridge. Field investigation determined the low chord elevation for the clear-span railroad bridge; and the International Boundary and Water Commission supplied data for Morelos Dam. The spillway elevation for this dam was modified in the backwater model to reflect extensive fill that exists downstream from the dam. The downstream fill can cause backwater over the Morelos Dam spillway.
- Historically there has been significant scour at Yuma narrows for large flood events. Previous studies by the Bureau of Reclamation concluded that there would be significant scour at the narrows and downstream from Morelos Dam for large flood discharges. To estimate an appropriate degree of scour, an HEC-6 sediment transport model was set up for this reach of the Colorado River. Equilibrium conditions were assumed at the upstream study limit at mile 32.9 and at the downstream study limit at mile 18.4 so that there was no scour or deposition at these sections. Morelos Dam served as a channel bed control at river mile 22.09. Three different transport functions--unit stream power, Duboy, and Toffaleti -- were compared; and as would be expected, different results were obtained with different sediment transport equations. The general scour trend, however, was the same with each method. hydrograph used in the computations was based on an average monthly flow of 35.000 ft³/s with a 3-day-storm hydrograph superimposed. Bed-material gradations were taken from gradations at river miles 32.9 and 21.0, published by the Bureau of Reclamation in "River Control Work and Investigations," December 1976.
- 53. The amount of scour or deposition in the HEC-6 model varied with discharge and time. In order to estimate an average channel cross section to use for peak-flow backwater computations, bed-profile elevations for $40,000 \text{ ft}^3/\text{s}$ just prior to the start of the 3-day-storm hydrograph were compared with channel-bed conditions at the peak


discharge of 140,000 ft³/s. Results obtained from using the three different transport functions for these two points on the hydrograph were then used to determine a smooth-bed profile representing the condition of the bed at the peak of various flood events. Cross sections in the HEC-2 model were redefined to reflect the scoured-bed conditions for discharges above 40,000 ft³/s.


- 54. Sensitivity studies were conducted on the HEC-6 model to determine the effect of the grain size and sediment input on the water-surface elevations. An increase in D50 from 0.25 to 0.35 mm caused an average increase in the water-surface elevation of 0.5 foot. The computations indicate that, if there is no sediment input into the HEC-6 model, sufficient material would be supplied upstream from station 29.1 from the existing river-bed material so that no significant change in water surface would occur downstream from this station. The maximum change in depth was 1.9 feet at the uppermost section. When the sediment inflow was tripled, this excess sediment would drop out upstream from section Water surfaces upstream from the narrows are significantly greater under this condition because of the limitation of scour through the constriction. However, this large sediment inflow is improbable; and if the HEC-6 model were extended upstream, it is expected that the extra sediment load would drop out before reaching the constriction. The sensitivity studies were set up to look at the effects of extreme variations in input parameters. These studies indicate that variations within the expected range of grain diameter and sediment input would have an insignificant effect on water-surface elevations within the study reach.
- An approximate overflow analysis was made for a discharge of 150,000 ft³/s, which would breach the existing river levees on both the California and Arizona sides of the river. This analysis is approximate and is intended only for economic purposes. It is reasonable to assume that the levees, once they are overtopped, would fail. water-surface elevations in the overbank were assumed to be equal to the water-surface elevation between the levees. By use of a graphical technique, it was determined how much the water-surface elevation would be reduced because of the overbank conveyance. Normal-depth rating curves were developed for various cross sections in the overbank. rating curve for the area between the levees, taken from the HEC-2 runs, was plotted with the overbank rating curve. The discharges for different water-surface elevations were added graphically to determine a rating curve for the composite cross section. A water-surface elevation for 150,000 ft $\frac{3}{3}$ was taken from this curve.
- 56. The West Main Canal acts as a secondary levee after the Yuma levee fails. Since this canal is not designed as a flood control levee, it would be overtopped during the 150,000 ft³/s event. However, before overtopping, the canal would limit the width of the overbank causing greater depths between itself and the Yuma levee. Composite rating curves were developed for this overbank area; however, it was determined that the elevation of the top of the canal would be the maximum water-surface elevation.


- The $150,000-\text{ft}^3/\text{s}$ event would also cause the lower reservation levee on the California side of the river to be overtopped. addition, overflow would reach this area from the upstream breakout across the Yuma Main Canal. This area is essentially a backwater or Flow must pass back over the levee and return to the ponding area. channel in order to continue downstream. Backing up the levee is Interstate 8, which would limit the northern extent of flooding. The low point in the lower reservation levee, therefore, would control the minimum water-surface elevation in this area. A minimum water-surface elevation of 134 feet was established; and the maximum water-surface elevation was set equal to the water-surface elevation adjusted for failure of the Yuma levee. The major constriction of the Colorado River at the narrows causes a ponding condition to occur upstream from Yuma. For the 150,000-ft³/s event, the high water would overtop the levees on both sides of the river and inundate an extensive area. The Yuma Main Canal controls the water-surface elevation in this area. Water would rise to an elevation of 138 feet, which is the low point on this canal.
- 58. Overflow delineations were made on USGS orthophoto maps and Corps of Engineers topographic maps. Overflow limits were plotted for all flows on the Corps of Engineers (1-in. = 100-ft scale) maps. Overflow limits and average water depths for 150,000 ft 3 /s are indicated on the USGS orthophoto maps. Water-surface profiles for the area between the Yuma and lower reservation levees were plotted. Depths at cross-section locations are shown on cross-section plots. The detailed data for Yuma hydraulic studies are on file in the Hydraulics Section of the Los Angeles District. Inundation limits for selected floods are shown on plate 7 of the main report.

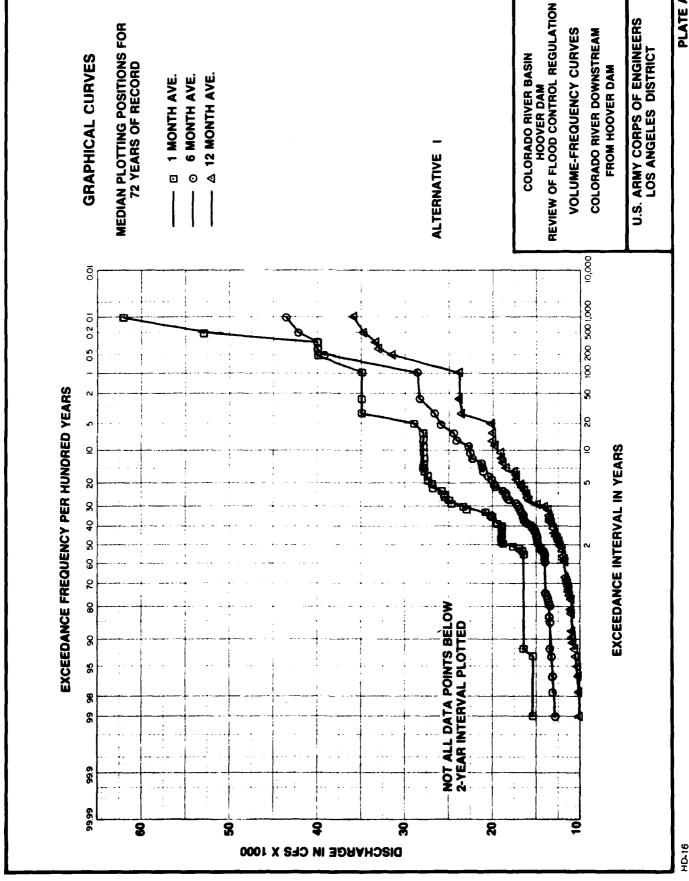



Ŗ

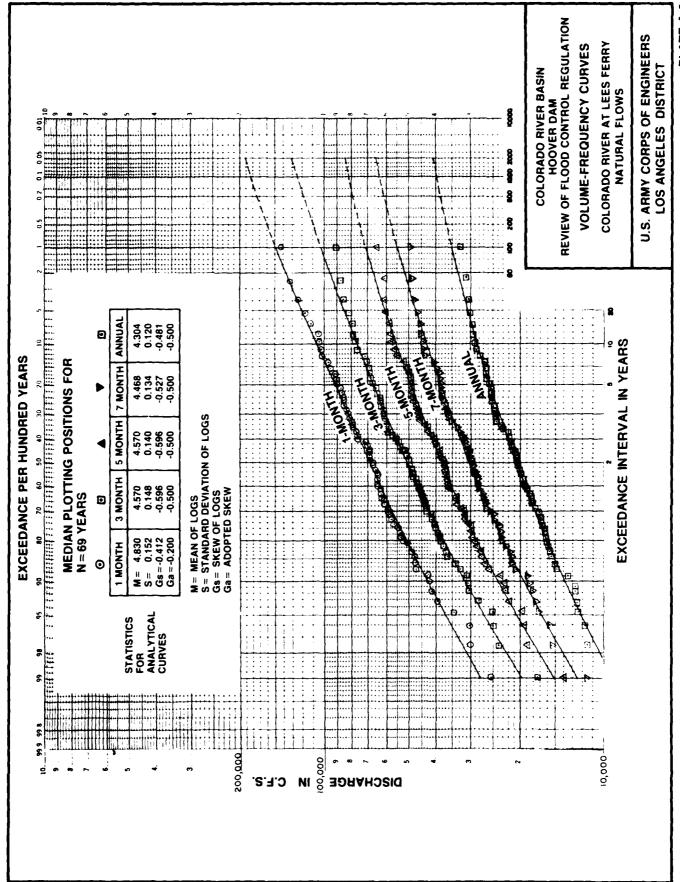


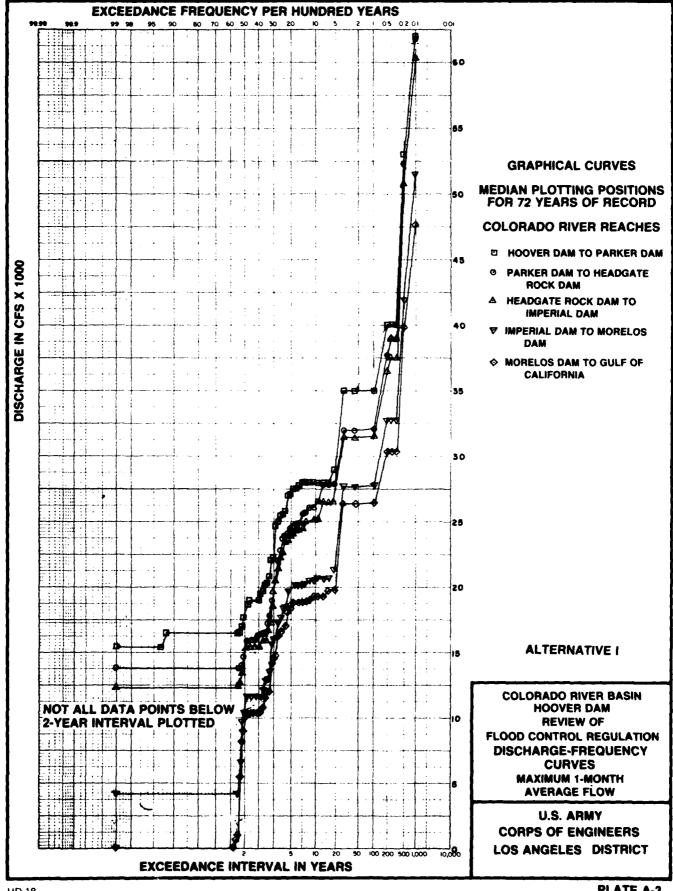


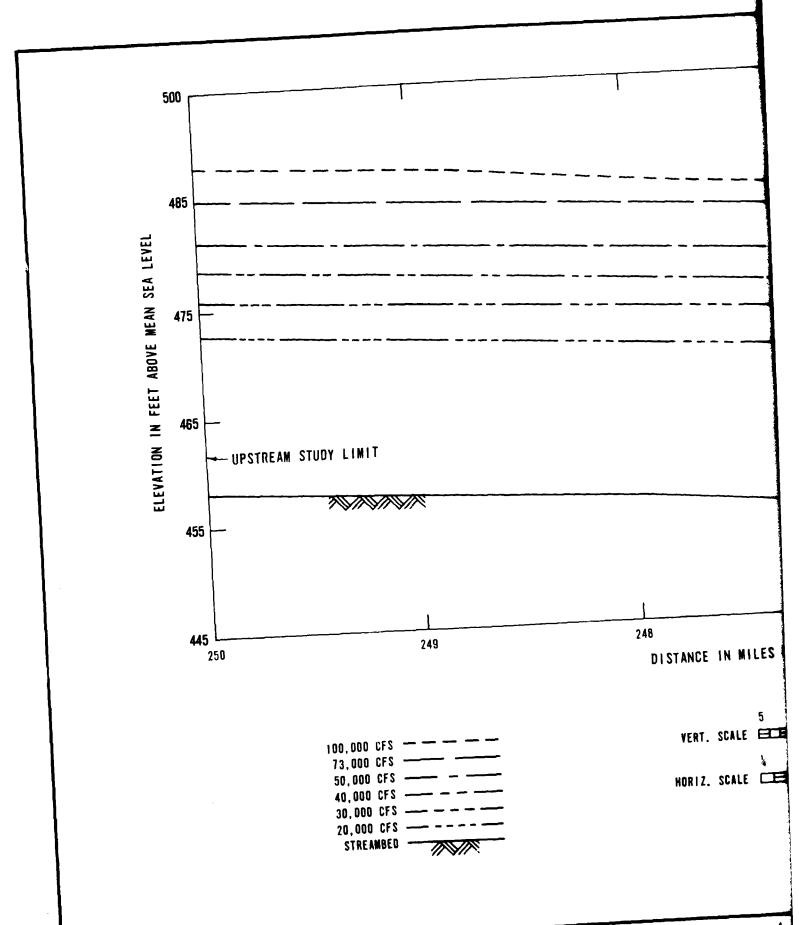


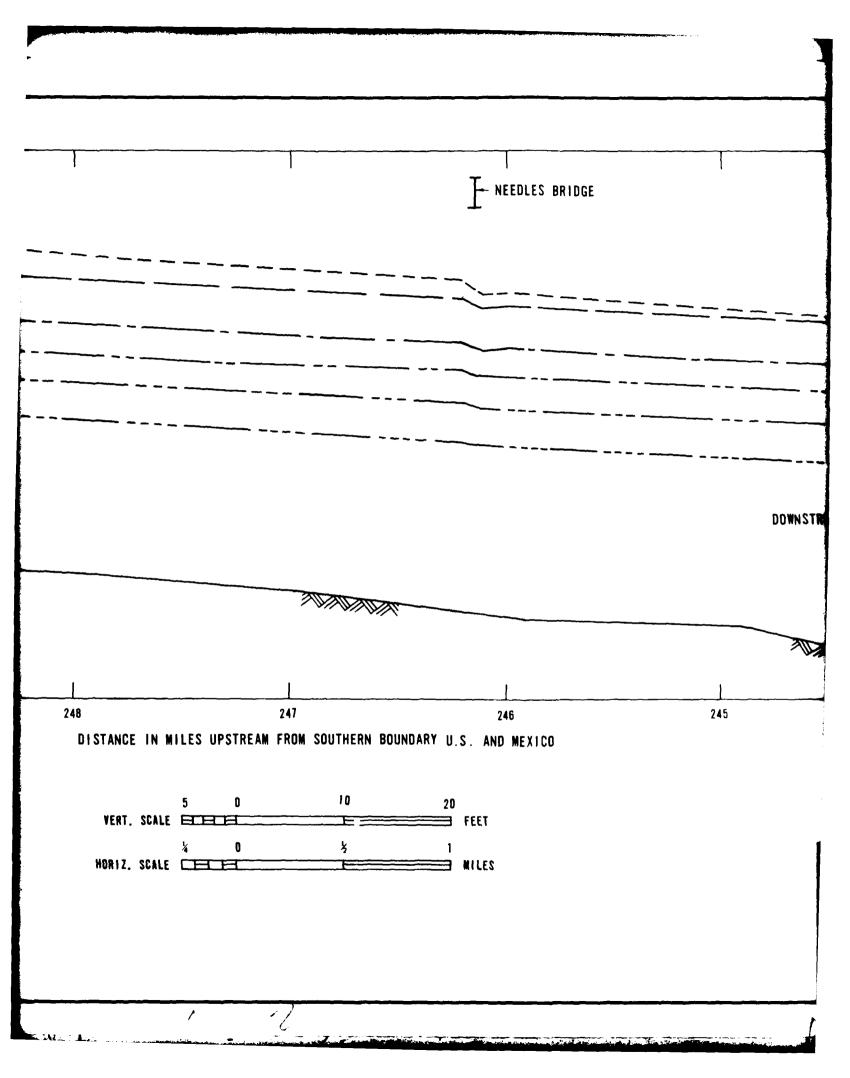


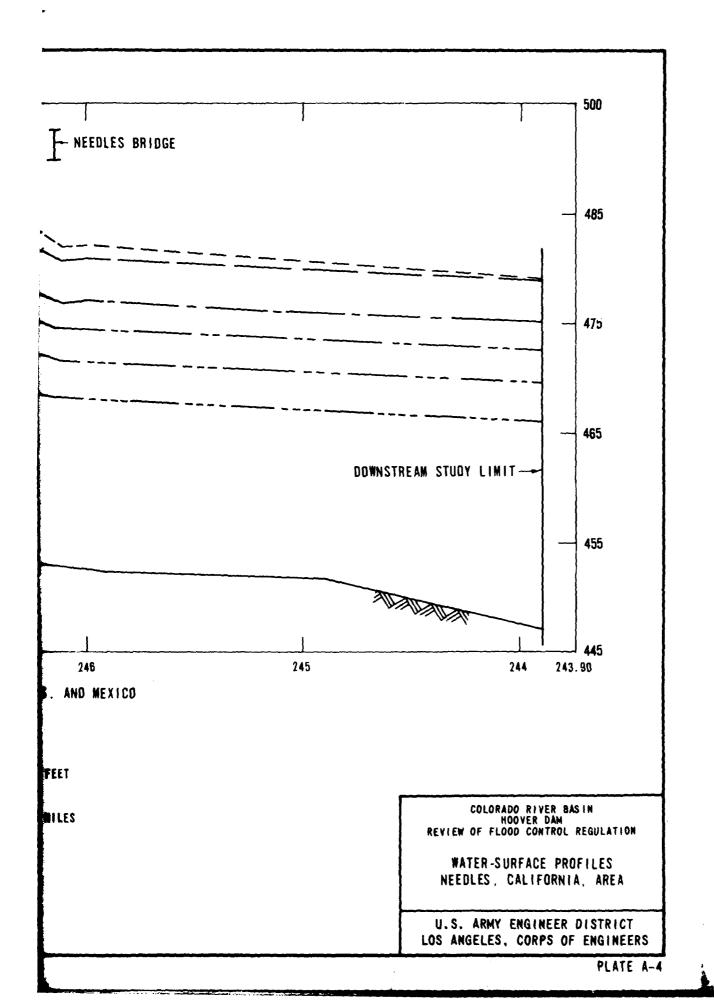


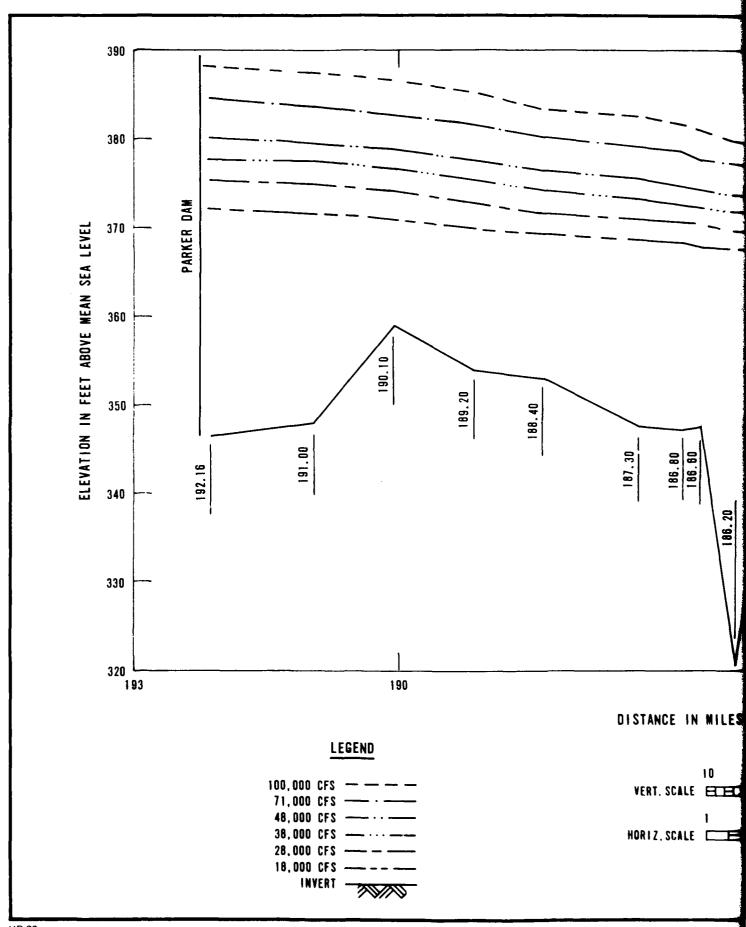

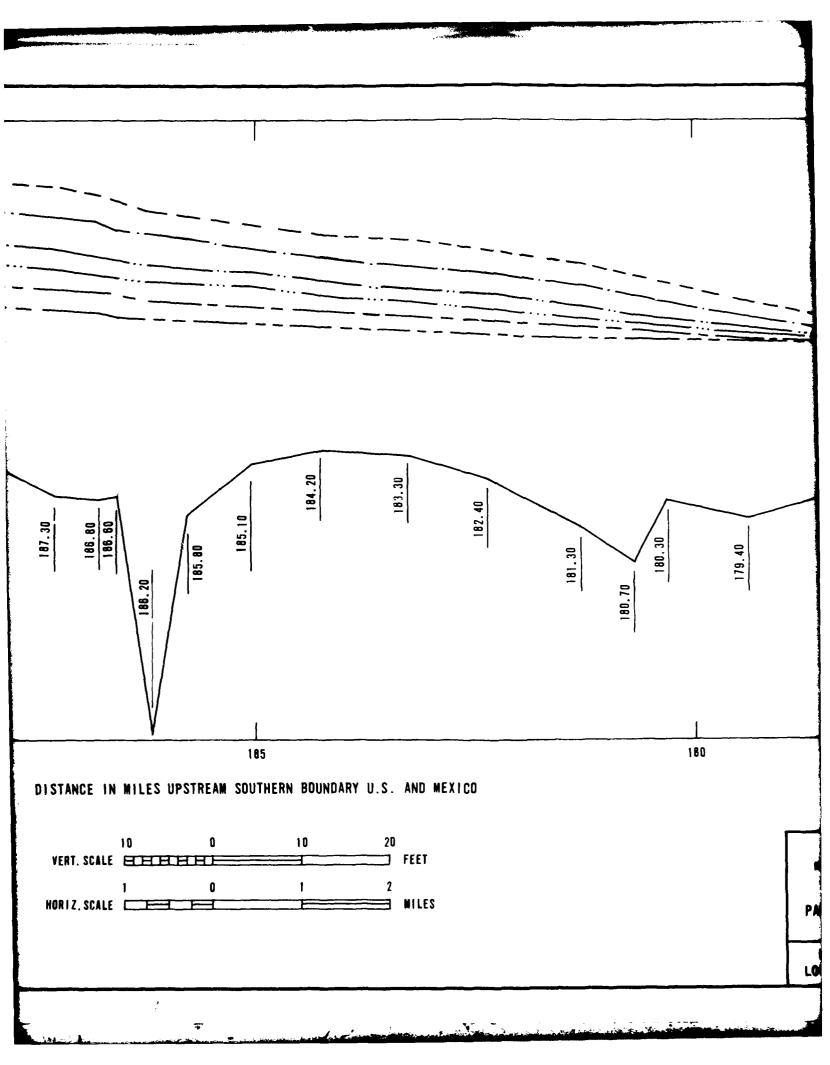

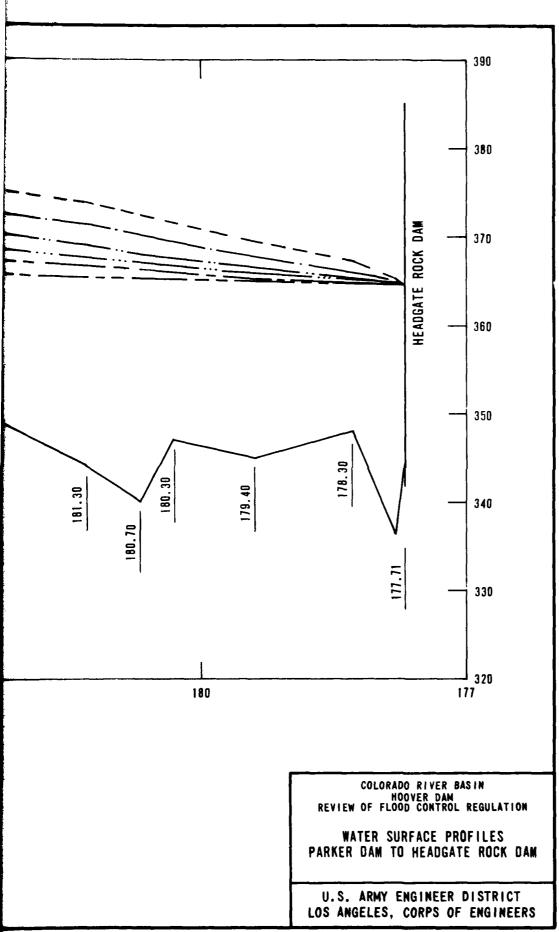

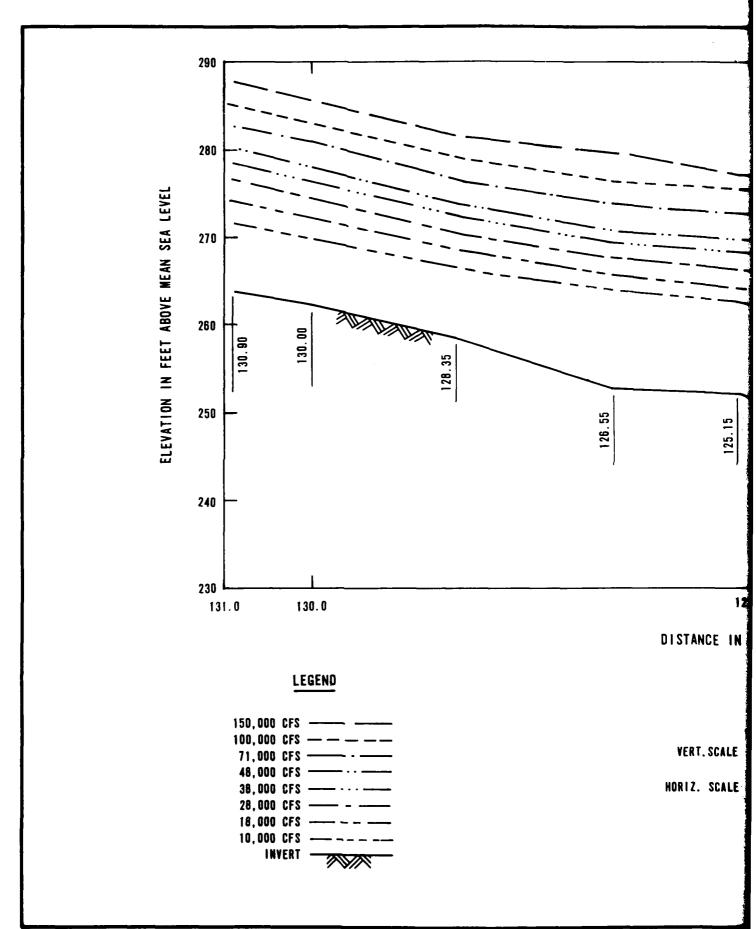

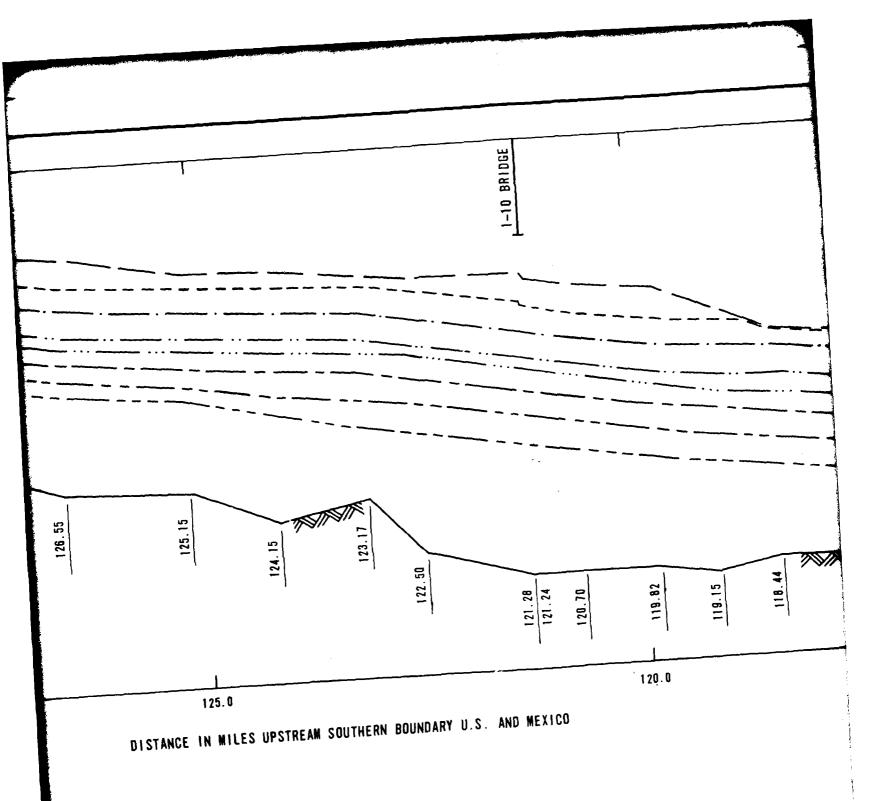

20


∃ FEET

3 MILES

10

VERT. SCALE HHHHH


HORIZ. SCALE

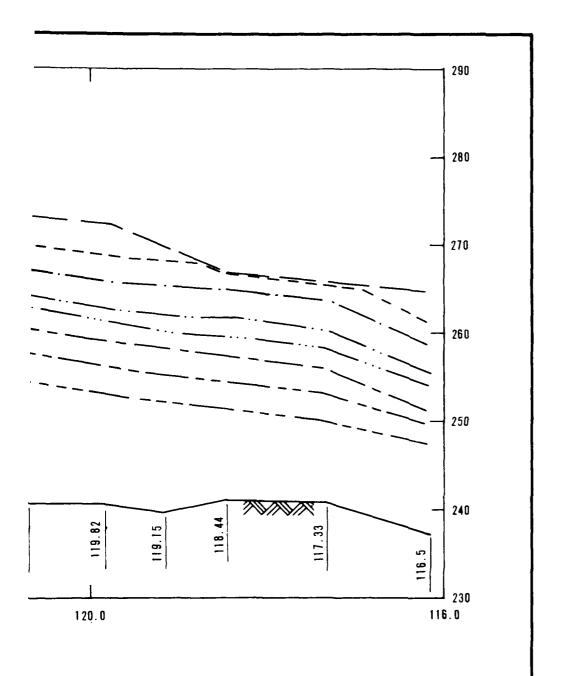


COLORADO RIVER BASIN HOOVER DAM REVIEW OF FLOOD CONTROL REGULATION

WATER-SURFACE PROFILES NEAR BLYTHE, CALIFORNIA

U.S. ARMY ENGINEER DISTRICT LOS ANGELES, CORPS OF ENGINEERS

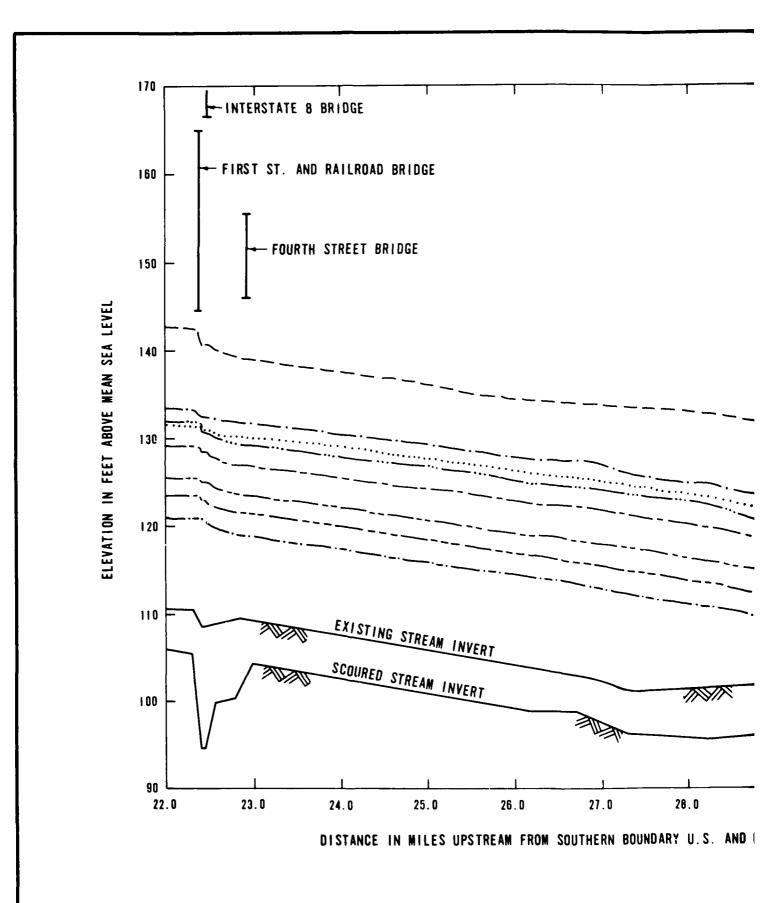

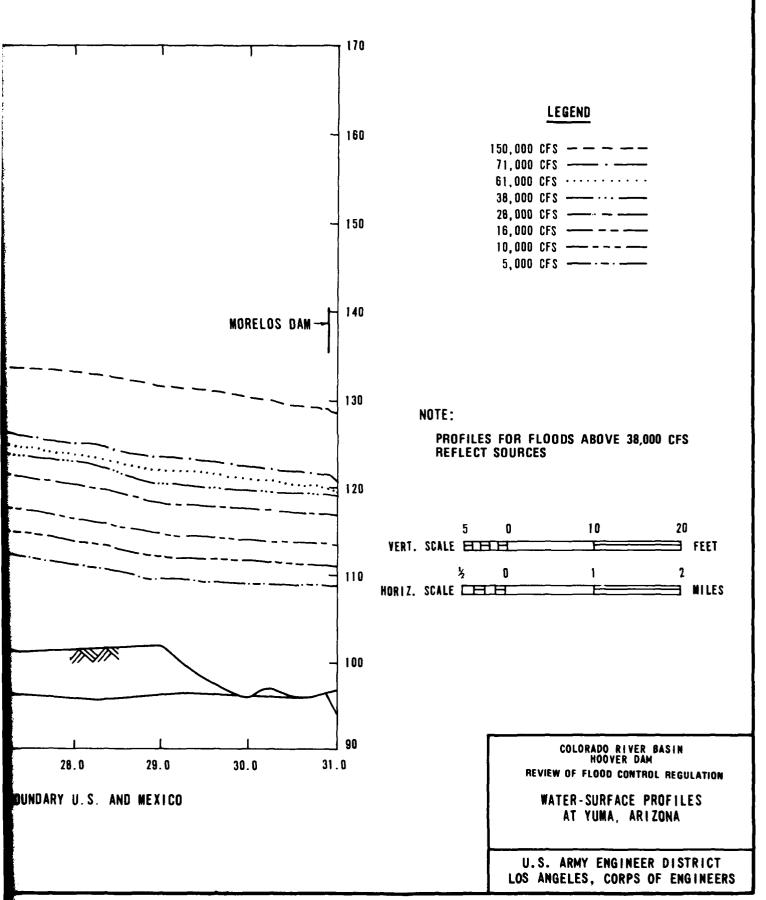

Appendix B EXISTING RIVERWORKS

Appendix B EXISTING RIVERWORKS

Contents

	Page
MOHAVE VALLEY DIVISION (DAVIS DAM TO TOPOCK)	B-1
TOPOCK GORGE DIVISION (TOPOCK TO LAKE HAVASU)	B - 2
HAVASU DIVISION (UPPER LAKE HAVASU TO HEADGATE ROCK DAM)	B-2
PARKER DIVISION (HEADGATE ROCK DAM TO PALO VERDE DIVERSION DAM)	B-2
PALO VERDE DIVISION (PALO VERDE DIVERSION DAM TO TAYLOR FERRY)	B-3
CIBOLA DIVISON (TAYLOR FERRY TO ADOBE RUINS)	B-3
IMPERIAL DIVISION (ADOBE RUINS TO IMPERIAL DAM)	B-3
LAGUNA DIVISION (IMPERIAL DAM TO LAGUNA DAM)	B-4
YUMA DIVISION (LAGUNA DAM TO MORELOS DAM)	B-4
LIMITROPHE DIVISION (MORELOS DAM TO SOUTHERN ARIZONA BORDER)	B-4

APPENDIX B

EXISTING RIVERWORKS

- 1. This appendix describes the riverworks along the Lower Colorado River established by the Bureau of Reclamation to prevent flooding, control stream meandering and sediment deposition, salvage water, stabilize and enhance fish and wildlife habitats, and improve recreation opportunities.
- 2. For administrative purposes, the Colorado River below Davis Dam has been divided into these 10 divisions:
 - Mohave Valley Division (Davis Dam to Topock)
 - Topock Gorge Division (Topock to Lake Havasu)
 - Havasu Division (Upper Lake Havasu to Headgate Rock Dam)
 - Parker Division (Headgate Rock Dam to Palo Verde Diversion Dam)
 - Palo Verde Division (Palo Verde Diversion Dam to Taylor Ferry)
 - Cibola Division (Taylor Ferry to Imperial Ruins)
 - Imperial Division (Adobe Ruins to Adobe Dam)
 - Laguna Division (Imperial Dam to Laguna Dam)
 - Yuma Division (Laguna Dam to Morelos Dam)
 - Limitrophe Division (Morelos Dam to Southern Arizona Border)

The Colorado River Front Work and Levee System in each division is discussed below.

MOHAVE VALLEY DIVISION (DAVIS DAM TO TOPOCK)

Scouring of the river channel below Hoover Dam by the clear water released from the reservoir, along with subsequent deposition of the eroded sediment in the backwater zone above Parker Dam, created severe aggradation in the lower Mohave Valley. Prior to 1946, aggradation of the channel in the lower valley caused a rise in average water levels until serious flooding occurred near Needles and there was a threat that conditions would worsen. Channel stabilization was begun in 1949 with initial work consisting of dredging an improved channel between Needles and Topock. This work and associated levee construction eliminated the immediate threat to Needles, but did not in itself provide the river stability between Davis Dam and Topock needed to assure that the problem would not recur. Subsequently, channel dredging, levee construction, and associated work were accomplished upstream from Needles to a point 10 miles below Davis Dam to reduce the pickup and transport of sediment. A settling basin was also built in the river above Topock to trap the sediment arriving from upstream sources and prevent its deposition in Topock Gorge. A hydraulic suction dredge, which is used periodically in the basin to remove this sediment, achieved the needed stability of the channel, and water levels at Needles were brought under control.

- 4. The levee system in the Mohave Valley Division, constructed of dredge material without riprap as an adjunct to the channel dredging, contributed somewhat to the protection of the adjacent lands. This was an economically responsible position for the development of the lands at that time.
- 5. More recently, the adjacent lands have undergone accelerated development that may warrant further work on the levee. Related work to improve fish and wildlife habitats and recreational features has also been provided. Topock marsh, which owes its existence to the closure of Parker Dam and the filling of Lake Havasu in 1938, has been encompassed with a dike to maintain water levels at elevation 455 feet above mean sea level. At this level, approximately 4000 acres of open water are available for fisheries and wildlife management. Inlet and outlet structures were constructed to control water apportioned to the Havasu National Wildlife Refuge. The Bureau of Reclamation helped develop the Needles marina and the Park Moabi marina near Topock. These marinas have become more popular each year since their construction.

TOPOCK GORGE DIVISION (TOPOCK TO LAKE HAVASU)

6. Before river stabilization work was begun in the Mohave Valley Division, heavy deposits of sediment were laid down in Topock Gorge and in the upper end of Lake Havasu. While the high-water conditions that existed in Needles prior to 1951 were being corrected, it was recognized that sediment deposits in the Topock Gorge Division were an important factor leading to high-water levels that existed from Topock, Arizona, north beyond Needles. It was also recognized that channel dredging in the river in the Topock Gorge Division would eventually be required. In October 1967, a plan was approved, and work was begun. In June 1968, however, the work was suspended after about 1.7 miles of the upper gorge had been dredged.

HAVASU DIVISION (UPPER LAKE HAVASU TO HEADGATE ROCK DAM)

7. This division covers all of Lake Havasu and the river between Parker and Headgate Rock Dams. Because of the lakes formed behind the dams, and aside from minor protective work at the dams, little need has existed for work under the Colorado River Front Work and Levee System in the division. Although the river does flow in the natural channel for several miles below Parker Dam, no significant work has been required because of the natural channel configuration and rock formation.

PARKER DIVISION (HEADGATE ROCK DAM TO PALO VERDE DIVERSION DAM)

8. Many reaches of the river in the Parker Division are subject to bank erosion, meandering, braiding, and (particularly in the lower part of the division) sediment deposition that makes the river shallow, unstable, and generally of marginal value to water-oriented

developments. The movements of the river have caused large quantities of sediment to be transported to downstream reaches. riverfront lands have also been lost by bank erosion. Until a sediment trap was built below Imperial Dam, the eroded materials were deposited in Imperial Reservoir, or handled through the All-American Canal Desilting Works and transported downstream to Mexico. Sediment sampling records indicate that the Imperial Reservoir now traps an approximate average of 50 percent of the sediment load, and the Desilting Works and the Laguna Settling Basin are removing the remainder. improvement work, about 14 miles downstream (made urgent by growing land development between Headgate Rock Dam and Alligator Bend) was completed in 1967. The river was stabilized by confining overwide reaches of the river between training structures on stabilized banklines. The river, however, has not been stabilized below Alligator Bend, although a levee was constructed for several miles above Palo Verde Dam on the Arizona side. This levee, designed to protect the adjacent Indian lands up to riverflows of 80,000 ft³/s, is in good condition.

PALO VERDE DIVISION (PALO VERDE DIVERSION DAM TO TAYLOR FERRY)

9. Except for routine maintenance and repair of constructed features, the channel stabilization in the Palo Verde Division is essentially complete. The work consisted primarily of earthfill training structures and bank riprap designed to prevent future meandering of the river in this division.

CIBOLA DIVISION (TAYLOR FERRY TO ADOBE RUINS)

10. Through much of the Cibola Division, the shallowness of the natural channel was due to sediment deposition. A program to correct channel deficiencies by dredging and by constructing levees was begun in 1964 and completed in 1970. The channel is well-defined, on good alinement, and stabilized. The levee, constructed of the dredge material, is not riprapped.

IMPERIAL DIVISION (ADOBE RUINS TO IMPERIAL DAM)

11. The Imperial Division constitutes the diversion pool and associated backwater areas above Imperial Dam. It is the recipient of the sediment generated in the Parker, Palo Verde, and Cibola Divisions. The sediment load arriving in the Imperial Division is deposited in areas outside the main channel. About 50 percent is deposited on sandbars or in backwater lakes, with the remainder diverted at Imperial Dam. Most of the diverted sediment is removed from the water by the desilting works in the All-American Canal, returned to the river below Imperial Dam, and dredged to permanent dry-land storage areas near the Laguna settling basin just above Laguna Dam.

12. Since Imperial Dam was closed, sedimentation has filled a number of the backwater areas, particularly in the upper end of the division. Other areas have been isolated from the river by natural river-formed dikes. Generally, the remaining deeper backwater areas are in the lower one-third of the division where the water was initially deeper and sediment deposition is less advanced. However, a short reach of the diversion pool immediately upstream from the dam is full of sediment; and occasionally in recent years, it has been difficult to divert water into the headworks of the Gila Gravity Main Canal. Some maintenance dredging immediately upstream from Imperial Dam has temporarily improved these diversions.

LAGUNA DIVISION (IMPERIAL DAM TO LAGUNA DAM)

13. The Laguna Division, which is the empty pool behind Laguna Dam, receives sediment passed by the Imperial sluice gates; and in recent years, has received large quantities of sediment returned from the All-American Canal Desilting Works. Because this created problems associated with Mexican diversions at Morelos Dam, the Bureau of Reclamation constructed a settling basin in the Laguna Division where sediment from upstream sources is trapped and pumped out with a dredge for disposal on dry land.

YUMA DIVISION (LAGUNA DAM TO MORELOS DAM)

Ĭ

14. The river channel extending from Laguna Dam to the upper end of the diversion pool above Morelos Dam was formed by the undiminished natural flow of the river before the dams were constructed. This flow averaged about 20,000 ft³/s. Substantially larger flows were required to overflow the channel and cause flooding. At the present time, normal flows in this division range from 100 to 1000 ft³/s, depending on the time of year and location within the division. While the historic riverbed averages 600 feet in width, riverflow currently occupies only about 120 feet. The remaining portions of the riverbed, being at or near the elevation of groundwater, support vigorous growths of vegetation (cattails, cane, arrowweed, salt cedar, mesquite, cottonwood, Above Yuma, these growths are controlled by complete channel reconstruction and continuing programs of vegetative control (mowing or cultivating). A 1969 plan for the Yuma Division anticipated the renovation of the low-flow channel by dredging, reshaping, and lowering the water table under the remainder of the riverbed, and instituting a program of vegetative control. After completion of the work in the upper 6 of the 20 miles of river channel in the division, the work was suspended.

LIMITROPHE DIVISION (MORELOS DAM TO SOUTHERN ARIZONA BORDER)

15. The river in the Limitrophe Division is no longer important as a channel for irrigation water; however, inadequacies have developed in its capacity to convey floodflows. These inadequacies, are being

corrected by work currently under way—primarily the routine clearing of selected portions of the floodway. In this division, the river is an international boundary; therefore, all work, whether planning or construction, is coordinated with the International Boundary and Water Commission.

Appendix C ECONOMIC EVALUATION OF ALTERNATIVE PLANS

Appendix C ECONOMIC EVALUATION OF ALTERNATIVE PLANS

CONTENTS

	Page
METHODOLOGY	C-1
PRESENT LAND USE	C-2
PRESENT DAMAGEABLE PROPERTY VALUES	C-3
FUTURE DAMAGEABLE PROPERTY VALUES	C-6
FLOOD DAMAGES BY ALTERNATIVE	C-9
HYDROPOWER VALUATION	C-9
SALINITY VALUATION	C-9
WATER SUPPLY	C-10
OPERATION AND MAINTENANCE COSTS	C-10
SUMMARY OF BENEFITS AND DAMAGES	C-11
IMPACT ANALYSIS	C-11
SOCIAL IMPACTS	C-11
Tables	
C- 1 Land use in flood plains of various-size floods	C-2
C- 2 Present and future damageable values of structures in flood plain	C-4
C- 3 Percentage relationship of flood depth versus flood damage	C-6
C- 4 Estimated damages per unit from floods of various magnitude from 1979 and 1989	C-7
C- 5 Estimated 1979 flood damage potential	C-8

CONTENTS (Continued)

		Page
C-6	Average- and equivalent-annual damages by alternative	C-13
C-7	Comparison of conserved water, power generation, and salinity rates for alternatives	C-17
C-8	Economic comparison of alternative plans with alternative 1	C-19
C - 9	Summary of comparison of final alternative plans	C-21
C-10	Number of structures subject to flooding in Parker Strip	C-25
C-11	Number of times in 100 years that floods would be equaled or exceeded through Parker Strip	C-25

Appendix C

ECONOMIC EVALUATION OF ALTERNATIVE PLANS

1. This appendix presents the economic evaluation of the various alternative regulation schedules for Hoover Dam. One estimate of a plan's performance is economic efficiency. In a project with no real first cost,* the one measure of economic efficiency that has logical validity is net benefits, analyzed at the discount rate established by the Water Resources Council (7-1/8 percent in fiscal year 1980). Maximum net benefits indicate the plan with greatest excess of positive effects (benefits) over negative effects (damages) or the least excess of damages over benefits.

METHODOLOGY

- Estimates of plan benefits and damages were based upon July 1978 price levels. Each plan was assumed to be operative for 10 years, or until the Central Arizona Project (CAP) is completed and fully operational. Each alternative was evaluated on its annual return with respect to hydropower generation, water diversions, Lake Mead ending storage, average annual flood damages, channel maintenance costs, and salinity (water quality). Recreational impacts were not evaluated because a wide range of release volumes could be made with little or no effect upon the recreational opportunities along the river, and any releases that would preclude water-based recreation of the river itself probably would shift the recreationists onto the lakes (Mead, Mohave, Havasu), with only slight degradation of the recreational experience. Since no "without project" conditions exist, all other alternatives were compared with alternative 1 (the plan that most closely resembles the 1968 operation schedule).
- 3. Flood damages were estimated by evaluating damages that would occur to 1980 and projected future development under each alternative plan. Damages are a function of type and value of damageable property as well as hydrologic and topographic conditions. Because no recent history of flooding exists for the study area, flood damage estimates were mathematically simulated.

^{*}Benefit-to-cost ratio and internal rate of return are meaningless with a one-sided equation.

PRESENT LAND USE

4. The area subject to flooding by the lower Colorado River is characterized by long stretches of vacant, nearly inaccessible areas, interrupted by stretches of agricultural areas with urbanization at Needles, Parker, Blythe, and Yuma. Most of the urban lands are in residential uses. The four reaches were selected to encompass the urbanized areas and the agricultural areas immediately adjacent to them. Table C-1 shows the number of units of various types of development within the flood plains that would occur from sustained discharges of various magnitudes.

Table C-1. Land use in flood plains of various-size floods.

	N	lumber of	structur	es inunda	ted
		At			Total
	At	Parker	At	At	for all
Land use	Needles	Strip	Blythe	Yuma	areas
Ву	flood of 10	00,000 ft	³ /s		
Mobile homes	10	1,588		11	1,609
Residential	776	347	211	123	1,457
Commercial/industrial	7	67			74
Public/semipublic	2	68			70
Agriculture (in acres)	24,393	4,776	20,164	5,756	55,089
Recreation facilities#		278			278
Total (excluding Ag)	795	2,348	211	134	3,488
Flood	of 71,000	ft ³ /s (7	8,000 ft ³	/s at Nee	edles)
Mobile homes	10	737		11	758
Residential	243	284	194	65	786
Commercial/industrial	7	47			54
Public/semipublic	2	64			66
Agriculture (in acres)	4,124	585	9.065	2,087	15,861
Recreation facilities*		277			277
Total (excluding Ag)	262	1,409	194	76	1,941
By floo	of 48,000	ft ³ /s (50,000 ft	3/s at Ne	edles)
Mobile homes	0	153	0	11	164
Residential	45	108	88	7	198
Commercial/industrial		13			13
Public/semipublic		10			10
Agriculture (in acres)	1,910	585		176	2,671
Recreation facilities*		277			277
Total (excluding Ag)	45	561	88	18	712
Note: See footnote a	t end of ta	ble.			

Table C-1 (Continued)

	Numbe	er of stru	ctures in	undated	
		At	<u> </u>		Total
	At	Parker	At	At	for all
Land use	Needles	Strip	Blythe	Yuma	areas
By	flood of 38	,000 ft ³ /s	(40,000f	t ³ /s at N	eedles)
Mobile homes	0	90		11	101
Residential	22	40		7	138
Commercial/industrial		4			130
Public/semipublic		6			6
Agriculture (in acres)				176	176
Recreation facilities*		232			232
meer cauton ractificies					
Total (excluding Ag)	22	372		18	401
	Ву	flood of 2	8,000 ft ³	/s	
Mobile homes		17			17
Residential		34		7	44
Commercial/industrial		1			1
Public/semipublic					
Agriculture (in acres)				90	90
Recreation facilities*		201			201
					
Total (excluding Ag)		253		7	260

^{*}Recreation facilities are primarily boat docks that would sustain significant damage with high flows.

PRESENT DAMAGEABLE PROPERTY VALUES

5. Present (1978) values of development in the overflow area were obtained from many sources. Estimates of improvement values for private property were made by (a) sampling development carried on the appropriate county tax assessor's books and adjusting the assessed valuation to market value, (b) consulting knowledgeable real estate brokers for valuation data, and (c) performing field inspections and developing appraisals using such references as the Marshall valuation service. Values were not determined for contents because any damaging release could be preceded by 2 to 4 weeks' warning, which would be ample time for residents to move their belongings to a safe location. It was also assumed that a significant portion of the mobile homes could be relocated with sufficient warning. Damages for the smaller (single width; 45-foot long or less) mobile homes, therefore, were limited to the costs of moving them. Table C-2 lists the values of damageable property within the overflow areas.

Table C-2. Present and future damageable values of structures in flood plain.

Ş

		Va	Value in thousands		of dollars	100				
			At Parker	er			:		Total for all	all
Land Use	1979 198	dles 1989	Strip 1979	1989	At Blythe 1979	the 1989	At Yuma 1979 19	89	location a	areas 1989
				Flow of	Flow of 100,000 ft3/s	£3/s				
Residential Commercial Public/semipublic Total	\$15,975 325 140 \$16,440	\$18,475 625 140 \$19,240	\$28,951 1,601 1,770 \$32,322	\$31,351 1,751 1,770 \$34,872	\$5,415 \$5,415	\$5,415 \$5,415	\$3,980 \$3,980	\$5,930 \$5,930	\$54,321 1,926 1,910 \$58,157	\$61,171 2,376 1,910 \$65,457
			F1	ow of 78	Flow of 78,000 or 71,000 ft3/s*	1,000 ft ³	*s/			
Residential Commercial Public/semipublic Total	\$5,315 325 140 \$5,780	\$7,815 625 140 \$8,580	\$16,243 1,207 1,575 \$19,025	\$18,643 1,357 1,575 \$21,575	\$4,800 \$4,800	\$4,800 \$4,800	\$2,000	\$3,950 \$3,950	\$28,358 1,532 1,715 \$31,605	\$35,208 1,982 1,715 \$38,905
			F1	OW Of 50	Flow of 50,000 or 48,000 ft ³ /s##	3,000 ft3	/s**			
Residential Commercial Public/semipublic Total	\$925 \$925	\$2,225 	\$4,400 306 795 \$5,501	\$6,800 456 795 \$8,051	\$2,200 \$2,200	\$2,200 \$2,200	\$430	\$630 059\$	\$7,955 306 795 \$9,056	\$11,855 456 795 \$13,106
Note: See footnotes	tnotes at	end of table	ble.							

Table C-2 (Continued)

## At Needles Str 1979 1989 1979 Str 1979 Str 1979 Str 1979 Str 1979 Str 1979 Str 1969 Str 1969 Str 1969 Str 1969 Str 1969 Str 1969 Str 1979				Val	Value in thousands of dollars	usands o	f dollars				
At Needles Str 1979 1989 1979 1979 1989 1979 Ial \$718 \$2,018 \$2,654 al \$718 \$2,018 \$3,235 al \$718 \$2,018 \$3,235	I			At Par	ker					Total for all	r all
tal \$718 \$2,018 \$2,654 al 186 al 1879 al 186		At Ne	edles	Strip	,	At Blythe	ythe	At Yuma	uma	location areas	areas
\$718 \$2,018 \$2,65 ⁴ 186 395 \$718 \$2,018 \$3,235	Use	1979	1989	1979	1989	1979	1989	1979	1989	1979	1989
\$718 \$2,018 \$2,65 ¹ 186 39 ² \$718 \$2,018 \$3,23 ²				F1	OW OF 40,	000 or 3	Flow of 40,000 or 38,000 ft ³ /s***	***S/			
\$718 \$2,018 \$3,235	dential	\$718	\$2,018	\$2,654	\$5,054	1 1	; ;	00ħ \$	\$600	\$3,772	\$7,672
\$718 \$2,018 \$3,235	ic/semipublic			395	395	ł	;	1	ł	395	395
	Total -	\$718	\$2,018	\$3,235	\$5,785	<u> </u>		\$400	009\$	\$4,353	\$8,403
				F1	Flood of 30,000 ft ³ /s	,000 ft3	/8				
	Residential Commercial			\$771 10	\$771 10			\$ 130	\$130	\$901 10	\$901 10
Public/semipublic 5781	lic/semipublic Total			\$781	\$781			\$130	\$130	\$911	\$911

*Needles, 78,000 ft $^3/s$; other areas 71,000 ft $^3/s$. **Needles, 50,000 ft $^3/s$; other areas, 48,000 ft $^3/s$. ***Needles, 40,000 ft $^3/s$; other areas, 38,000 ft $^3/s$.

The state of the s

FUTURE DAMAGEABLE PROPERTY VALUES

- 6. Future development in the flood plains was assumed limited to areas that are currently being developed and to areas that are free from flooding by the 100-year release under alternative 1.
- 7. Depth-damage relationships were used to evaluate the impact of the anticipated flows on development in the flood plain. These relationships, which were developed for each land-use category from historical flood-damage reports, have been verified and adjusted for different hydrologic conditions after each flood in the Los Angeles District. Table C-3 lists the percentage relationships of flood depth versus flood damage for selected points; these relationships, when applied to damageable property, were used to develop unit flood damages.

Table C-3. Percentage relationship of flood depth versus flood damage.

	Damage	in percent of	of value of struc	tures
Inside flood depth (ft)	Residential structures	Mobile homes	Public & commercial structures	Boat docks#
0.5	5	3.5	7	0
1	10	5	0	0
2	16.5	25	13	0
3	25	59	17	4.5
4	26.8	90	22	15
5	28.5	100	20	30
6	40	100	31	55
7	45	100	36	70
8	50	100	42	90

Note: In addition to the above, agricultural damage is assumed to be \$900/acre for 1 foot or more of inundation. Mobile home damage (for those that are 12 feet wide x 45 feet long or smaller) is \$400 in relocation costs.

^{*}Depth above normal high water.

^{8.} Table C-4 shows unit damages from floods of various magnitudes. Unit damages for the appropriate flood magnitude and land use were then multiplied by the number of units to calculate estimated damage (table C-5). These estimated damages are representative of the period 1979 to 1989.

Table C-4. Estimated damages per unit from floods of various magnitude from 1979 and 1989.

			Dam	Damage in thousands of dollars	sands of	dollars				
Land Use	At 100,0	At 100,000 ft ³ /s	At 78,000	00 ft ³ /s	At 50,0	At 50,000 ft ³ /s	At 40,000	•	At 30,000) ft ³ /s
	1979	1989	1979	1989	1979	1989	1979		1979	1989
				Needles						
Residential	\$13.2	\$12.1	\$4.1	0° h\$	\$0.1	\$0.1	9.0\$	9.0\$	ŀ	ļ
Mobile homes	7.2	7.2	4.7	T. 4	,	ı	ı	•	!	:
Commercial	0.6	12.5	6.9	9.6	•	ı	ı	ł	;	;
Public	17.5	17.5	14.5	14.5	ı	ı	ı	ı	1	!
Agriculture										
(1 acre)	1.0	1.0	0.9	6.0	0.9	0.9	-	1	1	;
			d	Parker Strip						
Residential	\$7.1	\$7.8	7.78	\$5.4	\$3°t	\$3.9	\$3.4	\$3.1	\$ 3.3	\$3.3
Mobile homes	5.9	5.9	3.9	3.9	2.0	2.0	o,	6.	٥.	6.
Commercial	7. 7	6.4	3.5	3.9	7.2	3.1	3.0	3.3	1.0	1.0
Public	0.6	0.6	5.6	5.6	12.0	12.0	6.8	6.8	0	0
Agriculture									,	1
(1 acre)	6.0	6.0	6.0	0.0	6.0	0.0	0	0	0	0
facilities	6.0	6.0	0.7	0.7	₩.0	η•0	0.2	0.2	-	0.1
				Blythe						
Residential	\$7.9	\$7.9	\$4.3	\$4.3	\$1.3	\$1.3		!	1	
Mobile homes	12.5	12.5	12.5	12.5	12.5	12.5	ł	;	ł	!
Commercial	0	0	0	0	0	0	:	ł	ł	ł
Public	0	0	0	0	0	0	ł	;	ł	;
Agriculture	(((ć	((
(acre)	6.0	0.9	6.0	6.0	0		·			
				Yuma		ļ				
Residential	\$12.8	\$15.2	\$8.	\$ 0.	\$7.8	\$6.6	9.18	\$ 3.8	0.5	\$0. 5
Mobile homes	11.8	11.8	11.8	11.8	⊅• M	₹°€	0.3	0.3	•	ċ
Commercial	1	:	1	1	1	1	;	1	:	;
Public	1	;	1	!	:	;	!	:	;	:
Agriculture (1 acre)	6.0	6.0	6.0	0.9	6.0	0.9	0.9	0.9	9.0	9.0

Table C-5. Estimated 1979 flood damage potential.

	Da	mage in thou	usands of dol	lars	
	At	At	At	At	At
	100,000	78,000	50,000	40,000	30,000
Use	(ft^3/s)	(ft^3/s)	(ft ³ /s)	(ft^3/s)	(ft ³ /s)
		Need	iles		
Commercial	\$ 50	\$38	\$ 0	\$ 0	\$ 0
Public	35	29	0	0	0
Residential	10,612	1,009	41	10	0
Mobile homes	72	47	0	0	0
Agriculture	23,696 \$34,465	3,712	1,719	0	0
Total	\$34,465	\$4,835	\$1,760	\$ 10	\$0
		Parke	r Strip		
Commercial	\$280	\$154	\$26	\$11	\$1
Public	614	360	120	41	0
Residential	2,374	1,156	343	208	111
Mobile homes	9,414	2,876	311	77	28
Agriculture	4,299	526	526	0	0
Recreation	025	404	40=		
facilities	\$17,216	191 \$5,263	105 \$1,431	<u>55</u>	22
Total	\$17,216	\$5,263	\$1,431	\$392	\$162
		B1:	ythe		
Commercial	\$0	\$ 0	\$ 0	\$ 0	
Public	0	0	0	0	
Residential	1,664	840	110	0	
Mobile homes	75	44	19	0	
Agriculture	18,148	8,159	0	0	
Total	\$19,887	\$9,043	\$ 129	\$0	
		Yı	uma		
Commercial	\$0	\$ 0	\$ 0	\$ 0	\$0
Residential	1,462	522	68	41	18
Mobile homes	130	130	37	3	1
Agriculture	5,180	1,878	158	158	<u>57</u>
Total	\$6,772	\$2,530	\$263	\$202	\$ 76
	Tota	al for above	e four reache	8	
Commercial	\$330	\$192	\$26	\$11	\$ 0
Public	649	389	120	41	0
Residential	16,112	3,527	562	259	129
Mobile homes	9,691	3,097	367	80	29
Agriculture	51,323	14,275	2,403	158	57
Recreational	00-	404			
facilities	235 \$78,340	191 \$21,671	105	<u>55</u>	22
Total	₹/O,34U	₹ <1,0/1	\$3.583	\$604	\$238

- 9. Damages for each type of land use were summed for each flood in order to determine the damage-discharge relationship for 1979 and 1989 conditions.
- 10. The damages expected to result from each size flood were weighted by the probability of occurrence of that flood by combining the damage-discharge and discharge-frequency curves. Standard damage-frequency integration techniques were then used to calculate average annual damages.
- 11. Equivalent annual damages were computed next by summing the present worths of the expected annual damages and applying the capital recovery factor (partial payment series) for a 7-1/8-percent discount rate.

FLOOD DAMAGES BY ALTERNATIVE

- 12. The impact of each alternative plan was evaluated by using the frequency curve associated with the alternative. The curve was applied to the basic damage-discharge curves. Average annual damages with each alternative were calculated by integrating the frequency curves and the damage-discharge curve. Equivalent annual damages were calculated at a 7-1/8-percent discount rate for a 10-year project life. Average annual and equivalent annual (7-1/8 percent, 10-year) damages with each alternative are shown in table C-6.
- 13. Flood-damage-reduction benefits attributable to each plan were taken as the difference between the damages with plan 1 and the damages with each of the other alternative plans.

HYDROPOWER VALUATION

14. The Bureau of Reclamation used its Colorado River Storage Project Simulation Model to determine the average annual production of hydropower for each alternative. (See discussion in appendix A, titled "Engineering.") A value of 30 mils (\$0.03) per kilowatt hour was assigned to the electrical energy because this price represents the cost of producing the power by alternate means. Table C-7 compares the power generation for the various alternatives.

SALINITY VALUATION

15. Salinity concentrations of Parker Dam releases for each alternative were also determined during historic flow runs of the Bureau of Reclamation's Colorado River Storage Project simulation model. Studies estimating salinity damages have used the salinity rate at Imperial Dam as the point of reference. It was assumed that differences between the salinity rates of average annual Parker Dam releases would be the same at Imperial Dam. The basis for this assumption is that the range of salinity concentrations of Parker releases is quite small (less than 2

mg/l) and the physical processes causing an increase in salinity levels between Parker Dam and Imperial Dam would occur in an identical manner for all the alternatives. The value of direct damages caused by salinity was determined to be \$293,400 per part per million per year (1978 dollars). The basis for this valuation is provided in the report "Colorado River Salinity - Economic Impacts on Agricultural, Municipal and Industrial Users," dated December 1980, by the Bureau of Reclamation. Tables C-7, C-8, and C-9 present in part, comparisons by alternative of the estimated salinity projections, salinity differences, and associated costs.

WATER SUPPLY

- Water supply benefits are of two types: water available for 16. diversion by the Metropolitan Water District (MWD) and the net differential between starting and ending storage in Lake Mead for the 72-year study period. The two components are complementary, in that one can only be increased at the expense of the other. Although it is likely that numerous entities will use more than the scheduled water demand in flood control releases, the MWD diversion of water is the only diversion that can be reliably counted on because its reservoir facilities in southern California are capable of storing water in excess of scheduled demand. Water valuation methodology varies widely from user to user; and because of the complex water entitlement laws, no definite economic conclusion can be drawn from the methodology used by any of the Water values given by the sellers varied from various water users. about \$2 to nearly \$200 per acre foot, with most values ranging from \$20 to \$50 per acre foot. For the purpose of this report, a value of \$30 per acre foot was assigned to both the ending storage and the diversions. Table C-7 compares the quantities of water conserved for each of the alternative plans.
- 17. The method used for determining water quantities available for diversion and also ending reservoir system storage was that of simulating the various alternative operating schemes using the Bureau of Reclamation's Colorado River Storage Project Simulation Model for the historical flow record 1905 to 1977.

OPERATION AND MAINTENANCE COSTS

18. A determination was made of operation and maintenance (O&M) costs of the Colorado River Front Work and Levee System associated with each alternative flood control operating plan. The methodology used to quantify the O&M costs associated with each alternative was to establish a relationship between the average monthly flow rate and the corresponding O&M costs. The Bureau of Reclamation's experience in managing the Lower Colorado River showed that O&M activities associated with channel scour, sediment transport, and bank erosion are proportional to the square of the discharge. O&M cost in 1978 amounted to \$1.3 million or \$107,000 per month for a normal Davis release of 12,000 ft³/s. The following tabulation shows the projected relationship of O&M costs to steady monthly releases from Davis Dam.

Flow (ft ³ /s)	O&M/Month (Thousands of dollars)
10,000	74
12,000	107
15,000	167
20,000	297
25,000	464
30,000	669
35,000	910
40,000	1,189

O&M costs for each alternative were then determined by multiplying each monthly O&M cost from the tabulation above by each average monthly discharge generated by the Colorado River Storage Project Simulation Model for the 72-year historical record simulation. Average annual O&M cost, as given in table C-7, varied only slightly because the similarity in the pattern of releases caused by the sequence of stepped releases adapted in all plans.

SUMMARY OF BENEFITS AND DAMAGES

19. Table C-7 compares water conserved, power generation, salinity rates, and operation and maintenance costs associated with each alternative plan of operation. Table C-8 compares the net benefits and damages of alternative 1 with those of each of the other alternatives.

IMPACT ANALYSIS

20. This section describes the socioeconomic impacts of the alternative plans. Many of the impacts usually evaluated are not applicable to this study, because all alternatives involve only the operating schedule of current reservoirs. Some of the impacts of the alternatives could be felt long after the estimated 10-year project life. Table C-9 summarizes the economic and social well-being accounts.

SOCIAL IMPACTS

21. Differences in social impacts among the nine alternatives are difficult to discern. Social impacts to be considered might include injury, death, displacement from one's home, and the emotional trauma of heavy individual financial losses. Social impacts normally correlate well with the number of inhabited structures and public use structures flooded. Along the lower Colorado River, the Parker Strip reach contains the most inhabited and public use structures with the greatest vulnerability to flooding and, therefore, would endure most of the social impacts from flooding. Table C-10 lists the number of structures in the Parker Strip reach subject to flooding by flows of 30,000 and 40,000 ft³/s. Flooding depths would range up to 4 and 6 feet, respectively.

- 22. One measure for comparing the social impacts of the alternative plans is the frequency with which structures would be flooded. Table C-11 lists by alternative the frequency of 30,000- and 40,000-ft $^3/$ s flows resulting solely from Hoover Dam releases.
- 23. Based on the frequency of flooding of structures, alternative 4 would have an advantage at $30,000~\rm{ft}^3/\rm{s}$, but would carry a greater risk of larger floods than all the other alternatives. Alternative 8 has a definite frequency of occurrence advantage at $30,000~\rm{ft}^3/\rm{s}$ and maintains the advantage for larger flows. One disadvantage of alternative 8 not disclosed by the frequency analysis would be greater duration of high flows and larger nonpeak flows. These characteristics would have some negative social impacts, particularly in displacement from homes. Many of the Parker Strip homes are secondary or vacation residences, which would soften the impact of displacement to some extent. The social impacts through the Parker Strip would be indicative of the impacts through all developed reaches, and the analysis can be considered representative of all reaches.
- 24. Sufficient warning time would be available with all alternatives to prevent injury or death from unexpected flood waves. However, any time larger and faster than normal flows occur, the possibility of a "freak" accident exists. Injury and death can result from careless or reckless behavior or from floodfight operations. All nine alternatives pose this threat, and none of the plans has any apparent safety advantage.
- 25. Social impacts also could result from shortages of water and hydropower. The impacts, however, would be mostly inconveniences caused by conservation measures requiring reduced uses of these resources for luxury purposes.

Use	Alı	ternative	1	A1+		<u> </u>	41:	
Use			<u> </u>	ALL	ernative :		Alter	native 3
Use			Equiv.			Equiv.		
Use			average			average		
		1979	1989	annual*	1979	1989	annual*	1979
Residential								
Needles	\$13	\$15	\$14.0	\$12	\$15	\$13.5	\$11	\$13
Parker Strip		36	40	37.5	31	35	32.1	29
Blythe	8	8	8.5	8	8	7.8	7	7
Yuma	4	5	4.7	3	5	4.2	4	6
Total all	reaches	\$61	\$68	\$64.7	\$54	\$63	\$57.6	\$31
Commercial								
Needles	\$ 0	\$0	\$0.2	\$ 0	\$0	\$0.1	\$ 0	\$ 0
Parker Strip		1	1	1.0	1	1	0.9	1
Blythe	1	1	1.4	1	1	1.4	1	1
Yuma	0	0	0.	0	0	0.	0	0
Total all	reaches	\$2	\$2	\$2.6	\$2	\$2	\$2.4	\$2
Public/semipub	lic							
Needles	 \$0	\$ 0	\$0.1	\$ 0	\$0	\$0.	\$ 0	\$ 0
Parker Strip		2	2	1.9	2	2	1.8	2
Blythe	1	1	1.1	1	1	1.0	1	1
Yuma	-	_	_	-	_	-	-	-
Total all	reaches	\$3	\$3	\$3.1	\$3	\$3	\$2.8	\$3
Recreational fa	acilities	S						
Parker Strip		\$ 3	\$3	\$3.5	\$3	\$3	\$2.8	\$3
Agriculture								
Needles	\$28	\$28	\$28.0	\$27	\$27	\$26.7	\$26	\$26
Parker Strip		6	6	5.9	6	6	5.6	6
Blythe	32	32	31.5	28	28	27.9	25	25
Yuma	12	12	11.0	11_	11	10.8	11	11
Total all	reaches	\$78	\$78	\$76.4	\$72	\$72	\$71.0	\$68
Total all dama								
Needles	\$41	\$44	\$42.3	\$39	\$42	\$40.3	\$37	\$40
Parker Strip		48	52	49.8	41	46	43.2	40
Blythe	42	42	42.5	38	38	38.1	34	34
Yuma	15	17	15.7	15	16	15.2	<u>15</u>	<u>16</u>
Grand tota	1	\$146	\$155	\$150.3	\$133	\$142	\$136.8	\$126

^{*} For 10-year span (1979-1989), computed using interest rate of 7-1/8 percent.

Table C-6. Average- and equivalent-annual damages by alternative.

ve 3		Alte	rnative 4		F	Uternativ	e 5	
1979	Equiv. average 1989	annual*	1979	Equiv. average 1989	annual*	1979	Equiv. average 1989	annual;
\$13 29	\$12.2 33	\$32 30.7	\$35 58	\$33.4 62	\$15 59.3	\$18 43	\$16.8 47	44.5
7 6 § 3 I	7.4 4.6 \$59	16 7 \$54.9	$ \begin{array}{r} 16 \\ \underline{12} \\ 5113 \end{array} $	$ \begin{array}{r} 16.5 \\ 9.5 \\ \hline \$125 \end{array} $	10 5 \$118.7	10 - 7 - \$73	$\frac{9.9}{\frac{6.1}{\$82}}$	\$77 . 9
					·	·		Ų.,, . ,
\$0 1 1	\$0.1 1 1.3	\$0 0.9 2	\$1 1 2	\$0.5 2 2.2	\$0 1.5 1	\$0 1 1	\$0.2 1 1.4	1.3
\$2	\$2	$\frac{0}{\$2.3}$	<u> </u>	0. \$3	0 \$4.2	<u>0</u> \$2	\$2	\$2.9
\$0 2	\$0. 2	\$0 1.8	\$0 3	\$0.2 3	\$0 2.8	\$0 2	\$0.1 2	2.5
1 -	1.0	2 -	2	1.6	1	1 _	1.1	
\$3	\$3	\$2.8	\$5	\$5	\$4.6	\$3	\$3	\$3.7
\$3	\$3	\$2.8	\$3	3	\$3	\$4	\$4	\$3.7
\$26 6 25	\$26.1 6 25.3	\$75 5.8 81	\$75 14 81	\$75. 14 81.8	\$37 14.3 44	\$37 8 44	\$36.9 8 44.1	7.3
<u>11</u> \$68	\$68	\$68.2	\$190	19.3 \$190	14 \$190.4	14 \$103	13.5 \$103	\$101.8
\$40 40	\$38.4 44	\$107 42.0	\$111 79	\$109.1 84	\$52 80 . 9	\$55 94	\$54 . 62	59.3
34 16 26	$\begin{array}{r} 35.0 \\ \underline{15.6} \\ \hline \$134 \end{array}$	$ \begin{array}{r} 101 \\ 27 \\ \hline \$131.0 \end{array} $	$\frac{101}{32}$	102.1 28.8 \$328	56 19 \$320.9	$ \begin{array}{r} 26 \\ 21 \\ \hline $221 \end{array} $	$\frac{56.5}{19.6}$	\$189.4

							Dama
	Alterna	ative 6			Alternat	ive 7	
		Equiv.			Equiv.		
		average			average		
Use	1979	1989	annual*	1979	1989	annual*	
Kesidential							
Needles \$14	\$17	\$15.6	\$12	\$14	\$13.	\$11	
Parker Strip	34	38	37.1	29	34	32.3	
Blythe 9	9	9.2	7	7	7.6	7	
Yuma 4	6	5.2	4	6	5.5	3	
Total all reaches	\$61	\$70	\$67.1	\$52	\$61	\$58.4	
Commercial							
Needles 0	0	0.2	0	0	0.1	0	
Parker Strip	1	1	1.1	1	1	1.	
Blythe l	1	1.4	1	1	1.3	1	
Yuma 0	0	0.	0	0	0.	0	
Total all reaches	2	2	2.7	2	2	2.4	
Public/semipublic							
Needles 0	0	1.0	U	0	0.	0	
Parker Strip	2	2	2.2	2	2	2.1	
Blythe l	1	1.1	1	1	.9	1	
Yuma						<u>-</u>	
Total all reaches	3	3	3.4	3	3	3.0	
Recreational facilities							
Parker Strip	3	3	2.9	3	3	3	
Agriculture							
Needles 33	33	34.	29	29	30.4	22	
Parker Strip	7	7	6.9	7	7	6.4	
Blythe 37	37	37.4	25	25	25.3	23	
Yuma 12	12	11.9	12	12	12.6	8	
Total all reaches	89	89	90.2	73	73	74.7	
Total all damages	5.0	40.0				•	
Needles 47	50	49.9	41	43	43.5	33	
Parker Strip	47	51	50.2	42	47	44.8	
Blythe 48	48	48.0	34	34	35.1	32	
Yuma 16	18	17.1	16	18	18.1	$\frac{11}{21(1)}$ 5	
Grand total	\$158	\$167	\$165.2	\$133	\$142	\$141.5	

^{*} For 10-year span (1979-1989), computed using interest rate of 7-1/8 percent.

Table C-6 (Continued)

		amage in thous	ands of dol	lars			
nati	ve 7	Alter	native 8			Alternative 9	
ge			Equiv.			Equiv.	
ge			average			average	
	annual*	1979	1989	annual*	1979	1989	annual*
6							
	\$11	\$12	\$11.2	\$12	\$14	\$12.9	
	32.3	24	26	24.5	31	35	32.8
Ð	7	7	6.6	7	7	7.6	
2	3 \$58.4	- 675	3.8	4	6	3.	05/ 0
	\$58.4	\$45	\$49	\$46.1	\$54	\$62	\$56.3
1	0	0	0.1	0	0	0.1	
*	1.	0	1.0 I	0.5	1	1	0.9
3	1.	1	1.2	1	1	1.3	0.9
۲	Ô	Ô	0.	Ö	0		
-	2.4	$\frac{-\overset{\circ}{1}}{1}$	2	1.8	$\frac{\frac{\sigma}{2}}{2}$	2	2.3
		-	_	2.00	-	-	2.0
	0	0	0.	0	0	0.	
	2.1	1	1	0.9	2	2	1.8
9	1	1	0 .9	1	1	1.	
		***		<u>-</u>		-	
	3.0	2	2	1.8	3	3	2.8
	_	_	_				
	3	2	2	2.2	3	3	3.3
	22	22	22.7	27	27	20.1	
"	6.4	5	5	4.2	27 6	28.1 6	5.9
3	23	23	23.5	25	25	25.4	J• 9
K			8.9		12	11.8	
-	$\frac{8}{74.7}$	8	58	$\frac{12}{59.3}$	$\frac{-12}{70}$	$\frac{11.0}{70}$	71.2
	,	30	30	37.3	, ,	. •	, 112
5	33	34	34.	39	41	41.1	
	44.8	32	35	32.3	43	47	44.7
•	32	32	32.2	34	34	35.3	
L	11_	12	12.7	16	18	14.8	
	\$141.5	\$108	\$113	\$111.2	\$132	\$140	\$135.9
			_				

			Conserved wate	r			
		Average		Average		Power generation	n, mkW
Alternative		annual Hoover release (1,000 a-f)	Lake Mead ending storage (1,000 a-f)	annual MWD diversions (1,000 a-f)	Average annual Hoover	Average annual Lower Basin ⁽ a)	Aver ann sys tot
		(1,000 4 1)	(1,000 4 1)	(1,000 4 1)	1100761	DESTI	
,	0.747	20.012	001	4.500	(100		
1	9,767		921	4,560	6,193	12,252	7,9
2	9,772	20,170	923	4,561	6,195	12,254	7,9
3	9,767	20,218	917	4,561	6,191	12,250	7,9
4	9,766	20,213	920	4,556	6,189	12,248	7,8
5	9,767	20,187	921	4,560	6,193	12,252	7,9
6	9,766	-	917	4,562	6,191	12,250	7,9
7	9,766	_	917	4,564	6,195	12,250	7,9
8	9,831	19,702	921	4,564	6,195	12,254	7,9
9	9,767	•	921	4,560	6,193	12,252	7,9

Note: a-f = acre-foot, mkWh = million kilowatt hours, and p/m = parts per million.

a. Includes Hoover, Davis, and Parker Dams.

b. Includes Upper and Lower Colorado River Dams.

Table C-7. Comparison of conserved water, power generation, and salinity rates for alternatives.

r generati verage	Average	av:	linity rates, erage annual	,	Operation and maintenance costs,
annual	annual		rker release		average annual
Lower (a)	system (b)	1,000	1,000		
Basin (a)	total(b)	a-f	Tons	p/m	(\$1,000)
12,252	7,902	7,675	715	2,194	
12,254	7 ,9 03	7,677	715	2,201	
12,250	7,903	7,677	715	2,201	
12,248	7,891	7,676	716	2,206	
12,252	7,902	7,675	715	2,210	
12,250	7,903	7,677	715	2,208	
12,250	7,903	7,677	715	2,208	
12,254	7,971	7,736	714	2,211	
12,252	7,902	7,675	715	2,210	

million.

Economic comparison of alternative plans with alternative 1. Table C-8.

£

	•			•	Alternative	ive			
Item	-	5	٣	7	2	9	7	8	6
			Plan description	cription					
l. January 1 storage									
(MAF)	5.35	2.67	4.50	5.35	5.32	4.50	4.50	7.50	5.35
2. Max. controlled release (1,000 ft ³ /s)	73	73	73	28	35	0#	20	73	73
Release steps $(1,000 \text{ ft}^3/s)$	19,28,35	19,28,35	19,28,35	19,28	19,28	19,28	19,28,35	19,28,35	19,28,35
	40,73	45,73		35	35,40	40,50	40,73	50,73	•
Relative	Relative economic i	impacts (eq	mpacts (equivalent annual values in thousands	nnual va	lues in	thousands	of dollars)		
Hydropower	1	\$60	09-\$	\$-120	0	\$- 60	09-\$	09\$	9
Lake Mead ending storage	ı	-93	12	0	-56	12	12	-1115	0
MWD diversions	ı	9	-120	-30	0	-120	-120	0	0
Flood damages	1	13	19	-171	-39	-15	80	39	14
Salinity	1	0	0	-293	0	0	0	293	0
Operation and maintenance	ı	2-	-7	-12	-16	-14	±1−	-17	-16
Relative net benefits	ı	33	-156	-626	-111	-197	-174	-740	7-

Minus indicates The values displayed in this table represent the relative difference from alternative 1. a decrease in relative benefits afforded by the plan. Note:

Item	1	2	3	
Plan description	(See ta	ible C-8 for January	, l storage red	quireme
Impact assessment*				
Water quality*				
Salinity (in ppm) average annual	-	-0.09	0.09	
Salinity cost (\$1,000)	-	0	0	
Hydropower				
Average annual total				
mkWh	2	-2	-4	
<u>Value</u> (\$1,000)	-	60	-60	-
Water quantity				
Lake Mead ending storage			_	
(1,000 a-f) 1979-88 water year	-	-43	5	
Value (\$1,000) @ \$30/a-f	-	-93	12	
Value of diversions 1979-88 water	year			
MWD (1,000 a-f)	-	2	-4	
Value (\$1,000) @ \$30/a-f	-	60	-120	
Social impacts				
Noise**	No impact		No impact	No i
Displacement**		as may be effected		
Aesthetic values**	No impact	No impact 1	No impact	No 1
Community cohesion**		"		
Community growth**	••			
Economic impact	••	••	**	
Property values**	••			1
			value of	
			property of	ieai
Tax revenues**	••		water.	ı
Tay feachines			property (
			because of	
Public facilities**	**	**	••	1
Public services**	•1	11	••	
Regional growth**	**	**	**	
Employment & industry activity**	**	**	••	
Displacement of farms**	tt	••		
Note: See footnotes at end of table.				

Table C-9. Summary of comparison of final alternative plans.

		Alternative				
3	4	5	6	7	8	9
storage redu	irements and s	rannad ralassa	nattern)			
rotage requ	aremenes and s	cpped release	pacterney			
0.09 0	1.0 -293	0	0.09	0.09 0	-0.56 293	0
Ü	273	Ü	Ü	Ü	293	Ū
-4	0	-2	-2	2	0	
-60	-120	0	-60	-60	60	0
5	0	-26	5	5	-511	0
12	0	-56	12	12	-1,115	0
-4 -120	-1 -30	0 0	-4 -120	-4 -120	0	0
120	30	V	-120	-120	O	U
npact	No impact the inability No impact	No impact of the system No impact	No impact to provide suf No impact	No impact ficient water No impact	(applies to all p	o impact lans). o impact
	"		"	"	"	**
" value of so property ne water.		**	"		н	"
property ta because of		:t	10	"	"	••
**	No impact	**	"	"	**	11
••	••	••	•	••	**	41
44	**	••	**	••	••	••

	Item	1	2	3	
Manma	ental impacts le resources**	No impact	No impact	No impact	. No im
	nal resources** nality**	**	**	••	••
Plan eva					
	ributions to planning Objectives	Yes	Yes	Yes	Yes
	peneficial and adverse effects (difference from A	lt. 1)*			
a. 1	NED				
	(1) Beneficial (\$1,000's equivalent annual 7-1/ 10-year life)	8%			
	(a) Hydropower (b) M&I water diversi	ons	60	-60	-120
	(\$30/AF) MWD (c) Ending storage in	_	60	-120	-30
	Lake Mead (\$30/		-93	12	(
	(2) Adverse (\$1,000 equiv 7-1/8%, 10-year life)	alent annual			
	(a) Salinity (\$293,40	0/ppm) -	0	0	-293
	(b) Flood damages(c) Operation and	-	13	19	-171
	maintenance		- 7	- 7	-13
	(3) Net (beneficial minus adverse)	-	33	-156	-62
	Environmental quality				
	Regional development Social well being				(Insignificate (Insignificate)

^{*}All figures reflect average annual difference between given alternative and alternative 1.4**Required by Section 122 of Public Law 91-611 (1970 Rivers and Harbors Act).

Table C-9 (Continued)

		Alternative				
	4	5	6	77	8	9
:t	No impact	No impact	No impact	No impact	No impact	No impact
	**	•	**	10	••	. **
	Yes	Yes	Yes	Yes	Yes	Yes
	-120	0	-60	- 60	60	0
	-30	0	-120	-120	0	0
	0	~ 56	12	12	-1,115	0
	-293	0	0	0	293	0
	- 171	-39	-15	8	39	14
	-12	-16	-14	-14	-17	-16
	-626	-111	-197	-174	-740	-2

(Insignificant for all plans)
(Insignificant difference among all plans)

d alternative l.

Table C-10. Number of structures subject to flooding in Parker Strip.

	Number of	structures
Type of structures	At 30,000 ft ³ /s	At 40,000 ft ³ /s
Residential	34	46
Mobile homes	17	90
Commercial	1	5
Semipublic	_ 0	6
Total	52	147

Table C-11. Number of times in 100 years that floods would be equaled or exceeded through Parker Strip.

(Flows resulting solely from Hoover Dam releases.)

Flow				Alt	ernativ	e plan			
(ft^3/s)	1	2	3	4	5	6	7	8	9
30,000	4.0	4.0	4.0	0.90	4.0	4.0	4.0	0.8	4.0
								Less than	
40,000	0.32	0.30	0.60	0.71	0.59	0.49	0.56	0.1	0.58

Appendix D EVALUATING THE THREAT OF OVERFLOWS INTO THE UNITED STATES

Appendix D

EVALUATING THE THREAT OF OVERFLOWS

INTO THE UNITED STATES

CONTENTS

	P	age
DESC	RIPTION	D-1
	Background	D-1
	River Channel changes	
	River discharges	
DISC	CUSSION	D-4
	Channel capacities and improvements	
	Tidal sandbar	
SUMM	IARY	D-6
	<u>Table</u>	
D-1	Colorado River momentary maximum discharges	D-3
	Plates	
D-1	Colorado River delta	
D-2	Colorado River delta profile	
D-3	Colorado River delta; Mexicali Valley-San Luis Valley major	
_	canals, drains, levees	
D-4		

Appendix D

EVALUATING THE THREAT OF OVERFLOWS TO THE UNITED STATES

DESCRIPTION

1. This appendix evaluates the possibility of the Colorado River overflowing to the west in Mexico and flowing back into the United States. The information was compiled from a series of meetings among representatives of the U.S. and Mexico Sections of the International Boundary and Water Commission (IBWC), the Corps of Engineers, the Bureau of Reclamation, and Mexico's Ministry of Agriculture and Hydraulic Resources.

Background

- 2. The Colorado River delta region is about 4700 square miles, 55 percent of which is in Mexico. (See pl. D-1.) In prehistoric times, the Colorado River, from its fixed point near Yuma, gradually swung like a pendulum from a northerly course into the Salton Sink to a southerly course into the Gulf of California. Thus, the river distributed fertile soils, and formed the lands that now comprise the delta. The most dramatic recent change in the river course took place in 1905 when a series of floods from the Gila Basin enlarged the river and it adopted the just-completed Alamo Canal as its main channel. The entire river flowed in this new channel until 1907, discharging into the Salton Sink and forming what is known today as the Salton Sea.
- 3. The Imperial Irrigation District subsequently built numerous levees and channel dams to redirect the river course southward into the Gulf. Since construction of Hoover Dam in 1935, and other reservoirs later, Colorado River floods have been controlled, and the natural river channel changes have been minimized.

River Channel Changes

- 4. Major changes have occurred in the course of the Colorado River channel in the delta since 1900. Although some of these changes were influenced to some degree by manmade works, they were brought about primarily as a result of the natural delta-building processes of the river itself. Plate D-2 is a profile of the Colorado River Delta.
- 5. The Colorado River in its delta is a shallow meandering stream with low banks. It has never developed a channel that would contain the floodflows. Historically, overflows spread extensively over lands densely covered with vegetation, causing the water to rapidly drop its sediment, thus building up the lands along each course adopted by the river to form secondary deltaic cones.

- 6. Since 1905, the river has not developed a single continuous channel to the Gulf. Instead, it has divided into a multitude of small distributary channels that spread over extensive areas where much of the river sediment was deposited. This deposition caused relatively rapid raising of the riverbed upstream, which (together with overbank depositions) caused the river to become perched on the crest of a secondary cone of sands and silts along each of its courses.
- 7. Thus, it has been characteristic of the river (a) to develop overflow channels along the side slopes of each course, one of which was in time adopted by the river as its main channel, and (b) to repeat the natural cyclic process of delta building. This process accounts for the major changes in the river's course, as well as for the frequent minor changes that have marked the past history of the river in the delta. It also accounts for the difficulty in maintaining levees of sufficient height and strength to guard against overflow and against changes in the river's course. Extensive levee construction and repairs have been going on ever since 1905 in efforts to protect the lands and confine the river.

River Discharges

- 8. Stream gaging records, begun at Yuma in 1902, indicate that, before construction of Hoover Dam 322 miles above Yuma, the river's average annual discharge was about 15,100,000 acre-feet. Upstream records indicate that more than 90 percent of the discharge at Yuma came from above Hoover Dam. Before Hoover Dam was constructed, the river at Yuma had long-duration floods with peaks as high as 190,000 ft 3 /s caused by late-spring snowmelt. The record flood at Yuma, 250,000 ft 3 /s in January 1916, originated largely in the watershed of the tributary Gila River, which enters the Colorado River just above Yuma.
- 9. Since completion of Hoover Dam in 1935, flows at Yuma have been held to less than 35,000 ft³/s. Floodflows in the Gila River watershed are controlled by Painted Rock Dam, built by the Corps of Engineers in 1959. Table D-1 shows the peak discharges of the Colorado River at Yuma since the record began in 1902. The marked reduction in annual peak discharge since 1935 caused by the collective regulating effect of all reservoirs in the Colorado River system is clearly evident. (See table 1 of main report.)

Table D-1. Colorado River Momentary Maximum Discharges. (In ft^3/s)

Place	Year	Discharge	Place	Year	Discharge		
Yuma	1902	59,200		1941	30,400		
2 01.00	03	73,000		42	31,800		
	04	51,500		43	19,000		
	05	112,000		44	21,200		
	06	109,000		45	22,900		
	07	116,000		46	16,800		
	08	62,700		47	14,200		
	09	150,000		48	21,300		
	1910	73,500		49	24,000		
	11	79,400		1950	22,900		
	12	146,000		51	16,100		
	13	63,600		52	23,600		
	14	141,000		53	24,300		
	15	102,000		54	18,200		
	16	250,000		55	18, 100		
	17	144,000		56	3,970		
	18	94,900		57	3,390		
	19	58,100		58	15,800		
	1920	190,000		59	13,700		
	21	188,000		1960	10,300		
	22	117,000		61	8,900		
	23	101,000		62	2,170	Glen Canyon	Dam
	24	69,800		63	5,050	completed	
	25	53,200	Colorado	64	3,060		
	26	73,200	River at	65	8,040		
	27	92,400	Northerly	66	5,650		
	28	99,400	International	67	7,020		
	29	91,000	Boundary	68	4,910		
	1930	54,500		69	4,040		
	31	29,000		1970	6,560		
	32	90,800		71	3,430		
	33	70,700		72	5,290		
	34	22,900		73	3,930		
	35	15,600	Hoover Dam	74	3,590		
	36	9,520	completed	75	5,760		
	37	23,200		76	8,930		
	38	21,700		77	11,960		
	39	34,900		78	5,190		
	1940	13,800		79	9,680		
				80	13,800		

Notes: Discharge from IBWC Water Bulletins and U.S. Geological Survey Water Supply Papers: 1902-64, Colorado River at Yuma (record discontinued in 1964); 1965-79, Colorado River at Northerly International Boundary.

DISCUSSION

10. The following material discusses channel capacities and improvements, and well as a tidal sandbar.

Channel Capacities and Improvements

- 11. The topographic divide in the Colorado River Delta is about on a line between Yuma and Cerro Prieto Mountain. (See pl. D-1.) The natural drainage of lands north of this line runs into the United States; the natural drainage of those south of the line runs south into the Gulf. (See pl. D-2.)
- 12. The significance of this fact, in evaluating the threat of overflow to the United States, is that river overflows that might occur south of this line would not pose a threat to the United States. Conversely, the greatest threat to the United States could be created if river overflows were to occur north of this line. It was in this northern portion of the Mexicali Valley that levees were built, repaired, and rebuilt by predecessors to the Imperial Irrigation District between 1907 and 1937 to protect against overflows from the Colorado River in Mexico back into the United States.

- 13. The first line of levees on the west bank of the river (Ockerson levee) is still intact and has been strengthened and a paved road built along its crown. Most of the secondary levees built have been obliterated. But Mexico's leveed irrigation canals would serve as effective secondary barriers to any westward flows (pl. D-3).
- 14. The fact that there have been no Colorado River overflows from Mexico into the United States since 1907—even though extremely high floodflows have occurred, ranging from 150,000 ft 3 /s to the maximum recorded flow of 250,000 ft 3 /s in 1916 at Yuma (table D-1)—demonstrates the effectiveness of the levee and levee canal system from a flood control standpoint.
- 15. The Ockerson Levee forms the first line of defense. It is a 25-mile-long project that was first built in 1911, and later reconstructed and repaired numerous times. A 9-mile section of this levee extending from Southerly International Boundary northward stands today as the primary barrier against overflow of the Colorado River to the west. In the unlikely event that the river would break through the Ockerson Levee, Mexico's leveed canal and drain system stand as secondary lines of defense, guarding against possible overflow into the United States.
- 16. The Ockerson Levee is well constructed. Its top provides the base of a 2-lane paved highway; and in many areas, its slopes are heavily protected by rock. A November 1979 joint inspection by engineers from the U.S. Corps of Engineers, the Bureau of Reclamation, and the International Boundary and Water Commission (IBWC), U.S. Section, confirmed the structural integrity of the Ockerson Levee.

- 17. In October 1979, the Mexican Ministry of Agriculture and Hydraulic Resources furnished updated river profiles, cross sections, and other hydraulic data. Using these data, the IBWC, U.S. Section, evaluated levee heights in relation to expected flows. Mexico considered flows up to $28,000 \, \text{ft}^3/\text{s}$. For purpose of analysis, the U.S. Section added to the Mexican profiles a preliminary water surface profile for a flow of about $70,000 \, \text{ft}^3/\text{s}$.
- 18. The engineering analysis performed by the U.S. Section shows the following: From Morelos Dam south to San Luis, Mexico, the river is flanked on the United States side (east side) by the Yuma Levee, and on the Mexican side (west side) by the Ockerson Levee. Based on the Mexican water surface profiles (verified by the U.S. Section), the system in this reach can carry a flow of 28,000 ft³/s with a levee freeboard of more than 3 feet on the United States side and more than 6 feet on the Mexican side. The U.S. Section's analysis using the Mexican profile shows the system in this reach can carry a flow of 70,000 ft³/s with a levee freeboard of more than 4 feet on the Mexican side and more than 1 foot on the United States side.
- 19. From San Luis south to river kilometre 50 (31 miles below Morelos Dam), the system can contain a flow of 28,000 ft³/s with a levee freeboard of more than 9 feet on the west side (Rodriquez Levee) and more than 3 feet on the east side (De Piedra Levee). (See pl. D-3.) A flow of 70,000 ft³/s in this reach would encroach to within 6 feet of the top of the levee on the west side. On the east side up to river kilometre 48 (mile 30), there is at least 1.5 feet of freeboard above 70,000 ft³/s.
- 20. Thus, it can be concluded that the levee system on the west bank of the Colorado River from the Northerly International Boundary to a point 35 river miles below Morelos Dam can contain a flow of $70,000 \text{ ft}^3/\text{s}$. The probability of a flow of this magnitude is very remote, less than once in a 1000 years; a flow of 28,000 ft $^3/\text{s}$ can be expected about once in 140 years.
- 21. In the last 30 years, the high degree of reservoir control on the river has permitted few large flows to flush the river channel. As a result, sediment has built up and vegetation has encroached, reducing the main channel capacity. To offset this, however, overbank areas beyond the low flow channel, but within the levees, have been cleared for agricultural purposes, thereby removing obstructions to the passage of floodflows. The net effect probably is an increased capacity to carry large floodflows.

Tidal Sandbar


22. A tidal sandbar has developed in the main channel of the Colorado River near its mouth, where it empties into the Gulf of California. The sandbar is about 14 miles upstream from Montague Island, about 78 river miles south of the Southerly International Boundary (pl. D-1).

- 23. According to a 1979 river profile prepared by the Ministry of Agriculture and Hydraulic Resources of Mexico, the tidal sandbar is about 18 miles long, with about 5 miles of its top above the water surface. At its highest point, the sandbar is about 6 feet above the normal river channel bottom. Plate D-4 shows a profile of the tidal bar. The sandbar has been there at least since 1972, when its presence was noted on a satellite photo.
- 24. The tidal sandbar blocks the mouth of the river, restricting free flow of water into the Gulf. The sandbar has acted as a dam, raising stages in the Colorado River a few miles upstream. As a result, flooding has been aggravated along the lowermost reach of the river. The river, unable to follow its normal course, seeks paths to the Gulf on either side of the sandbar. Left to its own means, the river could, if high flows continue, reestablish a channel through the sandbar or claim as its main course one or both of the side routes. Mexico reports some flow through the sandbar but no evidence that the flow is cutting a new channel through the bar.
- 25. The tidal sandbar in no way can affect the movement of water northward to create a threat of overflow to United States. The main reason is that the elevations on the side of the sandbar range from sea level to 10 feet above sea level and that is significantly lower than the topographic divide to the north, which is about 35 feet above sea level. Also the leveed canals would block northward flow in any case.
- 26. It is understandable that Mexico has done nothing about removing the bar or cut a channel through it because the bar is so large and the initial and continuing cost of removing the sand would be enormous.

SUMMARY


- 27. In summary, there is virtually no possibility of Colorado River overflow to the west and into the United States because of the following factors:
 - The levees and leveed canals along the west bank of the Colorado River, which run about 35 miles below Morelos Dam, can safely contain a flow of $70,000 \text{ ft}^3/\text{s}$. A flow this size or larger is unlikely to occur.
 - The Ockerson Levee, the primary line of defense agains overflow to the west and into the United States, is structurally sound. It probably is the strongest levee along the Colorado River in Mexico.
 - The natural slope of the land and the leveed-canal and drain systems would direct overflows southward in the unlikely failure of Ockerson Levee.

- Mexico is raising levees and making other improvements in the flood protection system along the Colorado River to protect valuable agricultural developments in the Mexicali Valley; and plans additional improvements.
- In the extremely unlikely failure of all the above protective measures that would make overflow to the west in the critical reach of the river imminent, Hoover Dam releases could be cut back allowing time for emergency repairs. Good quality rock is available in the nearby Andrade Quarry in the United States for emergency repairs.

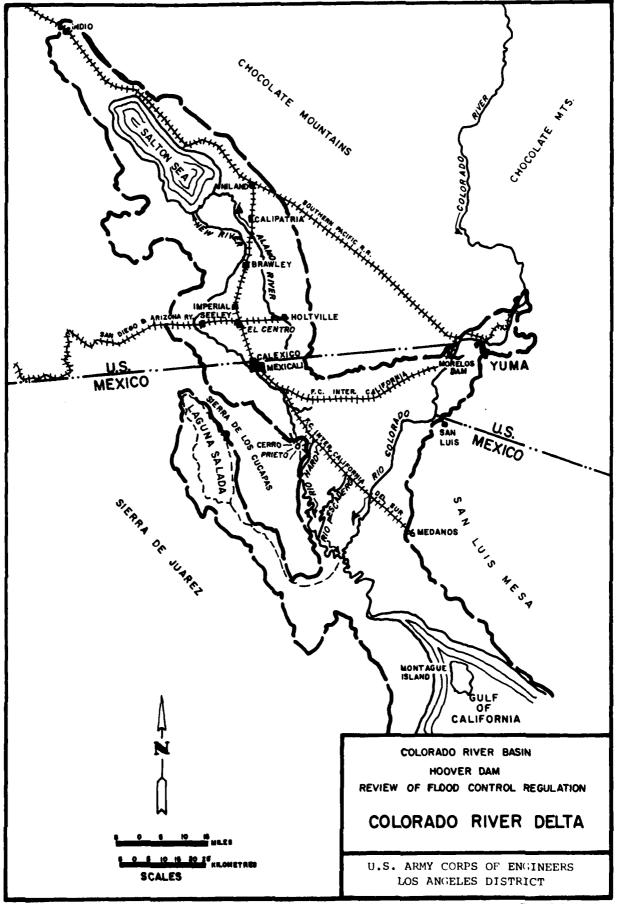



HD-23

PLATE D-I

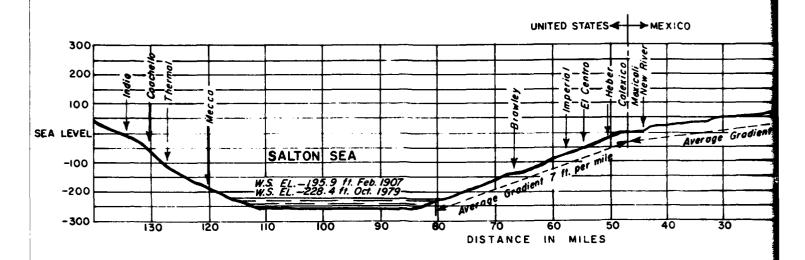


YUMA TO SALTON SEA

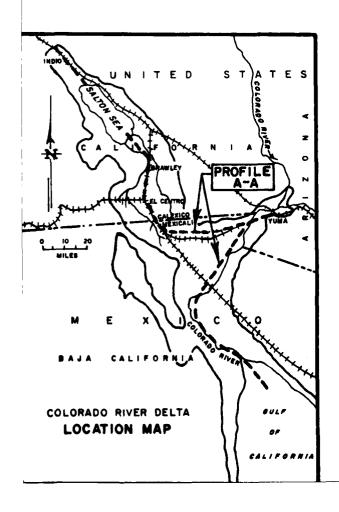

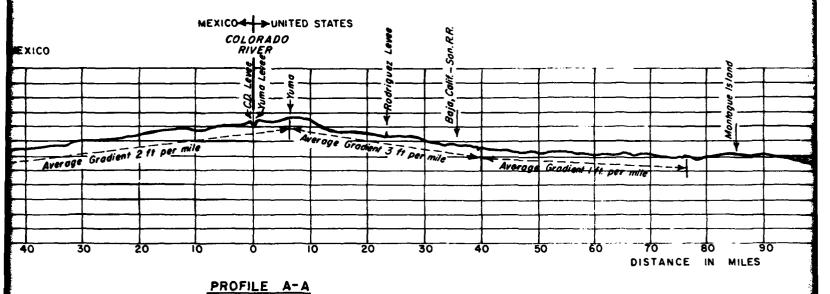


YUMA TO GULF OF CALIFOR

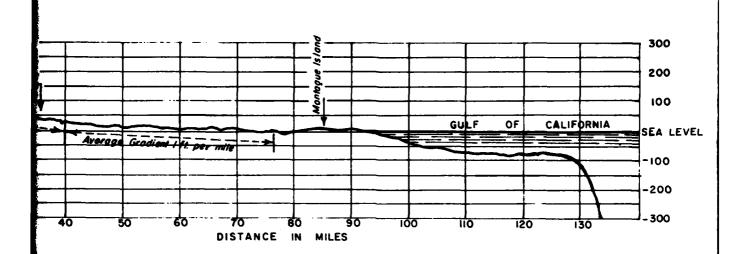


YUMA TO GULF OF CALIFORNIA


COLORADO RIVER BASIN
HOOVER DAM
REVIEW OF FLOOD CONTROL REGULATION
COLORADO RIVER DELTA
PROFILE


U.S. ARMY CORPS OF ENGINEERS
LOS ANGELES DISTRICT

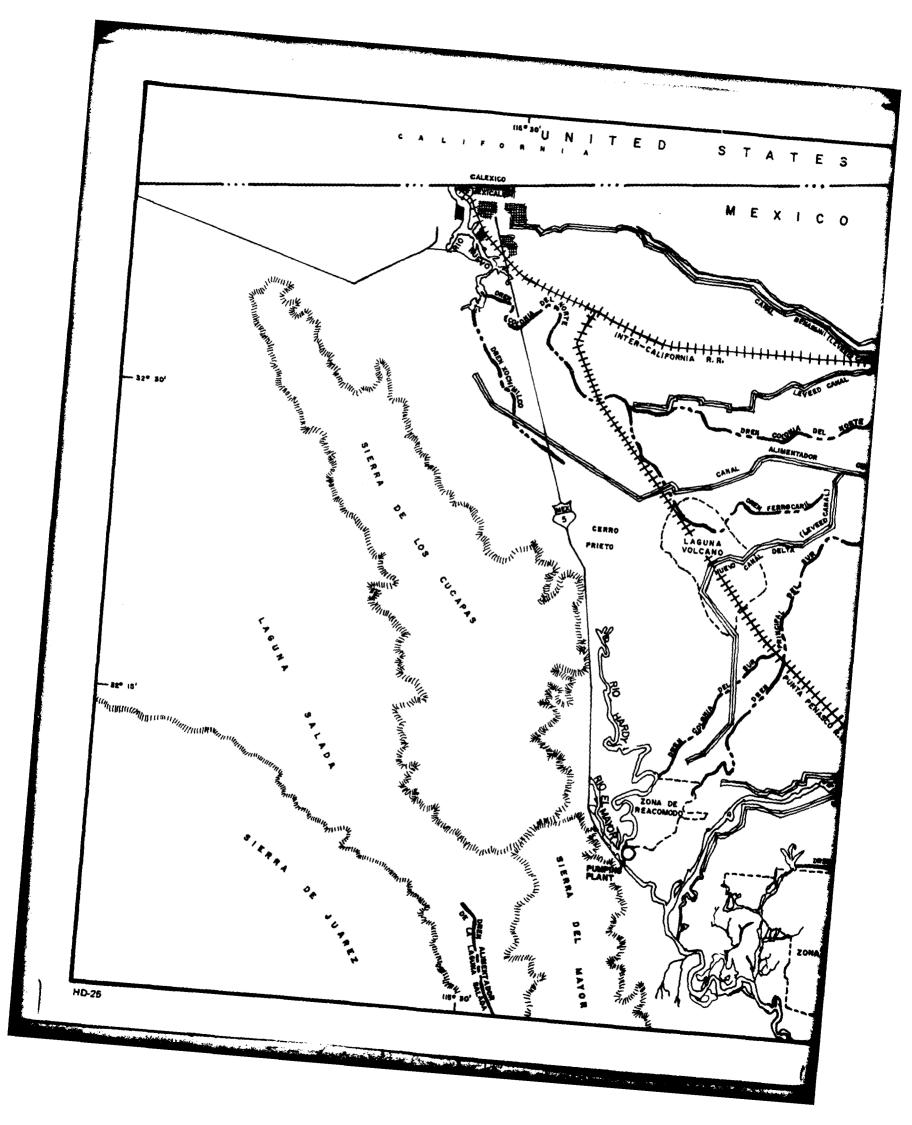


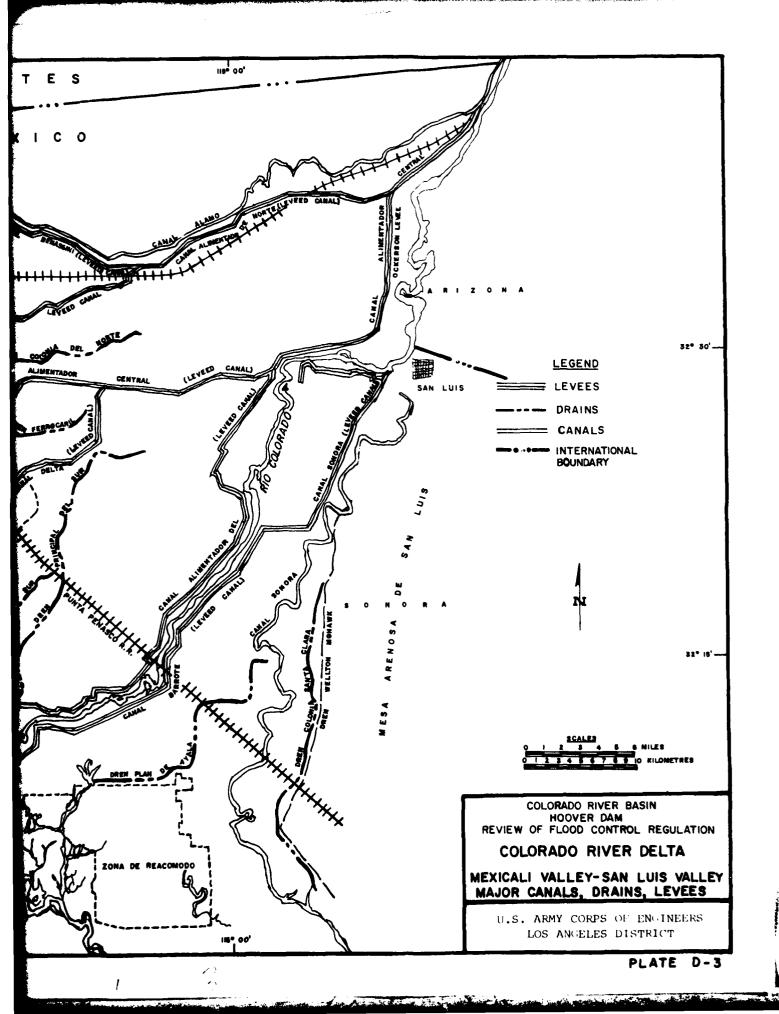

COLORADO TIDAL SAND

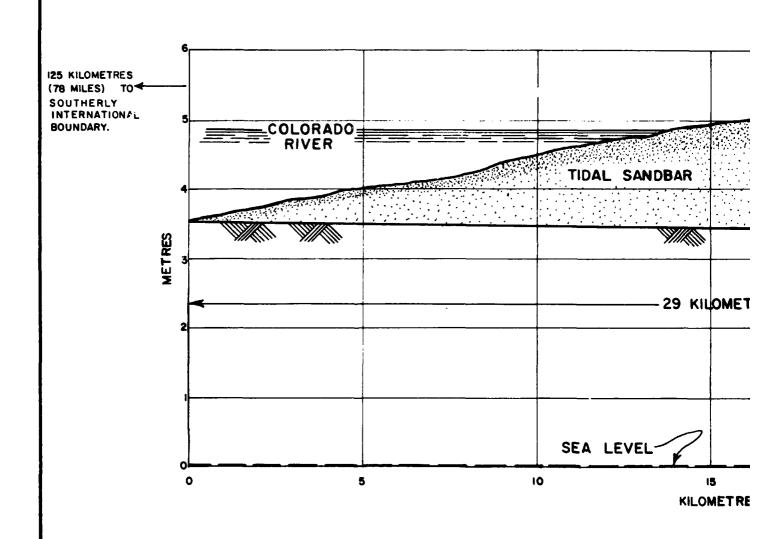


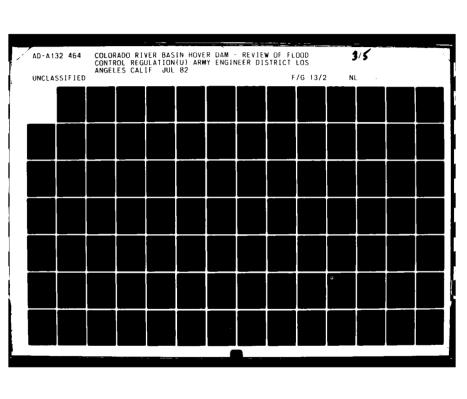



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS-1963 α

LORADO RIVER Idal Sandbar

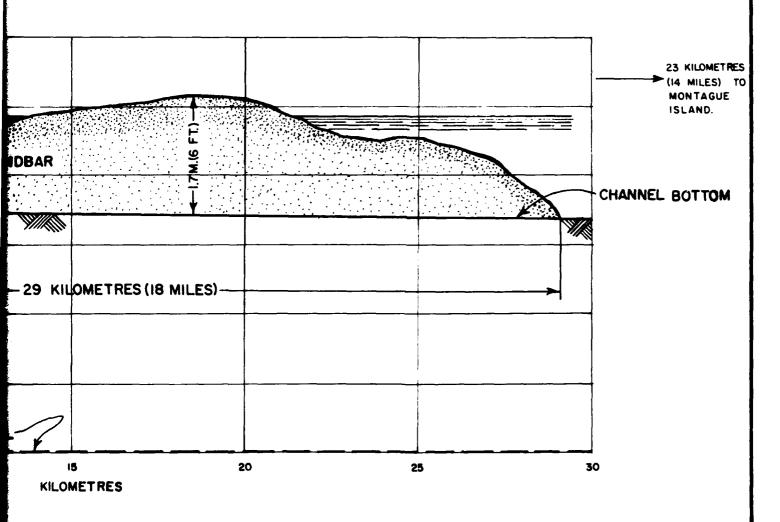

COLORADO RIVER BASIN
HOOVER DAM
REVIEW OF FLOOD CONTROL REGULATION
COLORADO RIVER
TIDAL SANDBAR

U.S. ARMY CORPS OF ENGINEERS
LOS ANGELES DISTRICT

Appendix E FINDING OF NO SIGNIFICANT IMPACT AND ENVIRONMENTAL ASSESSMENT

APPENDIX E

Table of Contents

																					Pag	e
Finding of No	Significant	Impact	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	E-1	•
Environmental	Assessment .		_	_		_	_		_	_	_		_	_	_	_	_				5-3	ı.

United States Department of the Interior Bureau of Reclamation Lower Colorado Region, Boulder City, Nevada

Finding of No Significant Impact Hoover Dam Flood Control Operating Criteria

FONSI NO.

LC-82-7

Finding of No Significant Impact Number (Region)

Recommend:

Regional Environmental Officer

Approved:

Regional Director

Finding of No Significant Impact Hoover Dam Flood Control Operating Criteria

The Los Angeles District of the Corps of Engineers and the Lower Colorato Region of the Bureau of Reclamation have jointly conducted a water control study (entitled Colorado River Basin, Hoover Dam, Review of Flood Control Regulation, December 1981) culminating in a recommendation for a new flood control operation plan for Hoover Dam. The previous flood control operation plan established in 1968 was predicated on the condition that the non-damaging channel capacity below Hoover Dam was 40,000 ft/s. Investigations carried out as part of the water control study determined that the current non-damaging channel capacity is 28,000 ft/s. The recommended flood control plan seeks to maintain Hoover Dam releases at or below 28,000 ft/s to the extent practical to do so. The reduction in available non-damaging channel capacity resulted from the lack of high discharge flood control releases from Hoover Dam during the filling of Lake Powell from 1962 to 1980 in conjunction with developmental pressures along the river. Now that Lake Powell has filled, higher flows resulting from Hoover Dam flood control releases could be necessary. A return to a flow regime below Hoover Dam similar to the period prior to the construction of Lake Powell is anticipated.

In the water control study conducted by the Corps of Engineers and Bureau of Reclamation during 1977-1981, nine alternative flood control operation plans were formulated to test the significance of various flood control storage space allocations and patterns of flood control releases. Each of the plans was evaluated by considering its impact on flood control protection, water conservation, hydropower production, recreation, wildlife enhancement, water quality, and operation and maintenance costs. The 1968 flood control operation plan was not retained as an alternative because it was not a viable implementable operation plan. The 1968 plan called for releases of up to 40,000 ft /s, which would be damaging, during the preparatory spacebuilding period (October through December) when no clearly demonstrable flood threat exists. However, alternative 1 in the water control study closely resembles the 1968 plan in that it retains the same January 1 and August 1 flood control storage allocation as the 1968 plan.

The environmental impacts of implementing any of the nine alternative flood control operation plans have been analyzed and described in the attached environmental assessment. A Finding of No Significant Impact (FONSI) is recommended for the proposed flood control operation plan based on the following reasons discussed in greater detail in the Environmental Assessment.

l. The recommended flood control operation plan is very similar to the 1968 plan and hence produces the same general environmental impact as the 1968 plan. Because the water regulating effect of the reservoir system on the Colorado River is so great, the operation of these reservoirs in effect establishes the riparian environment, which is significantly different from the natural (unregulated) riparian environment. The recommended plan is similar to the 1968 plan in three

- basic ways: (a) the same flood control storage allocations are retained, (b) the flood control releases are based on forecasted inflow, (c) a release in excess of 40,000 ft³/s is not made unless absolutely necessary.
- 2. The most significant changes called for the recommended plan, namely the extended space building period (August through December) and the stepped release pattern, tend to reduce the magnitude of maximum flood control releases as compared with the 1968 plan. The lower magnitude of required flood control releases and the more gradual shift from normal releases to flood control releases would result in less severe water level fluctuations, but longer inundation of shoreline areas. Although the lower flood control discharges of the recommended plan result in longer duration flows to achieve the same overall level of flood protection, the environmental impacts are less detrimental than higher flows.
- 3. Both positive and negative impacts will occur to terrestrial and aquatic resources under the proposed plan. These impacts will occur under all alternatives, including the no action plan, but are viewed as temporary and not significant because of the low probability of occurrence and short duration of the flooding expected. The impacts which can be expected include increased quality of backwater habitats in riverine areas, increased turbidity and scouring in mainstream habitats, and inundation of vegetation and therefore wildlife habitat during temporary flooding. Less severe water level fluctuations under the proposed plan will lessen impacts on established riparian communities. Impacts to aquatic habitat in reservoirs because of decreased water levels occur under the existing conditions and should not differ under the proposed plan.
- 4. The recommended plan would not adversely impact on any endangered species.
- 5. An archaeological analysis of the recommended plan revealed that no cultural resources proposed or eligible for inclusion on the National Register of Historic Places would be affected by the plan. A copy of this FONSI and the environmental assessment will be sent to the State Historic Preservation Officers of Arizona, California, and Nevada.
- 6. The recommended plan would not significantly affect the socioeconomic conditions of the region, except to provide a somewhat increased margin of protection to development in the flood plain.

After assessing the impacts associated with the recommended flood control operation plan, it is concluded that a FONSI meets the criteria established in the National Environmental Policy Act and an Environmental Impact Statement (EIS) is not required.

United States Department of the Interior Bureau of Reclamation

Environmental Assessment Hoover Dam Flood Control Operating Criteria

> Lower Colorado Region Boulder City, Nevada

TABLE OF CONTENTS

1.	Introduction	Page E-7
	1.1 Purpose	E-7 E-7
2.	Description of Alternatives	E-7
	2.1 Nonviable Alternatives	E-7 E-8
3.	Description of Existing Environment	E-8
	3.1 General	E-8 E-8 E-10 E-13 E-18
4.	General Effect of High Flows on Fish and Wildlife Resources	E-19
	4.1 Vegetation	E-19 E-20 E-20
5.	Assessment of Higher Flows and Comparison of Alternatives	E-21
	5.1 Hoover Dam to Davis Dam	E-22 E-24 E-26 E-29
	Boundary	E-33 E-37
6.	Summary	E-37
7.	Consultation and Coordination	E-39
	Literature Cited	F-40

LIST OF FIGURES

		Page
	Average Monthly Flows Along the Lower Colorado River rom 1967 to 1976	E-11
	LIST OF TABLES	
		Page
Table 1 Table 2	Alternative Plans	E-9
Table 3	International Boundary	E-12
Table 4	Dam to the Southerly International Boundary Vegetative Communities and Criteria used	E-14
Table 5 Table 6	in Classification	E-15 E-16
Table 7	Colorado River From Hoover Dam to the Southerly International Boundary Projected Sustained 1 Month Flows (in ft /s)	E-17
iable / ·	in the Riverine Reaches From Hoover Dam to Lake Havasu for 9 Alternative Hoover Dam Flood Control Operating Criteria	E-23
Table 8	Number of Acres of Each Yegetation Type Inundated by 50,000 ft /s Sustained Flow From Davis Dam to Lake Havasu	E-25
Table 9	Number of Acres of Each Vegetation Type Inundated by a 50,000 ft /s Sustained Flow	
Table 10	From Parker Dam to Palo Verde Dam	E-28
Table 11	Flood Control Operating Criteria	E-30
Table 12	Inundated by 50,000 ft ³ /s Sustained Flow From Palo Verde Dam to Imperial Dam Projected Sustained 1 Month Flows in the	E-32
	Riverine Reach From Palo Verde Dam to Imperial Dam for 9 Alternative Hoover Dam Flood Control Operating Criteria	E-34
Table 13	Number of Acres of Each Yegetation Type Inundated by 50,000 ft /s Sustained Flow From Imperial Dam to the Southerly	
Table 14	International Boundary	E-36
	Alternative Hoover Dam Flood Control Operating Criteria	E-38

1. Introduction

1.1 Purpose

The Bureau of Reclamation (Bureau) and the Corps of Engineers (The Corps) are evaluating nine alternative Hoover Dam flood control operating criteria. The purpose of this environmental assessment is to determine if there are significant differences between alternative operating criteria in impacts on vegetation, fish, wildlife, or archaeological resources which could be used in the selection of the preferred flood control operating criteria.

1.2 Need

Since the closure of Glen Canyon Dam in 1962, storage space in Colorado River reservoirs has been in excess of that required to control floods. Today, storage in Colorado River reservoirs is near capacity and there is a high probability, over the next 10 years, that flood control releases from Hoover Dam will be required.

The current flood control operating criteria of Hoover Dam are predicated on a non-damaging downstream channel capacity of 40,000 ft /s. Analysis of the flood channel below Hoover Dam by the Corps indicated a 40,000 ft /s flow would be damaging today. The damages result primarily from development within the flood plain at Needles, along the Parker strip, and at Yuma.

Because of the above factors the reevaluation of Hoover Dam flood control operating criteria is important at this time. The major evaluating criteria used by the Corps are flood damages (primarily based on damages to structures in the flood plain), water conservation, and hydropower production. This assessment analyzes the effect of alternative flood control operating criteria on the natural environment.

2. Description of Alternatives

2.1 Nonviable Alternative

2.1.1 No Action

The selection of the no action alternative would mean continued operation of Hoover Dam under the existing flood control operating criteria. These operating criteria allow releases of up to 40,000 ft³/s beginning October 1 to reach the required January 1 flood control space in Lake Mead and other upper basin reservoirs. Releases of 40,000 ft³/s will cause economic damage downstream. Thus, the no action alternative is not a viable alternative because it could result in releases that cause economic damage when no demonstrable flood threat exists.

2.1.2 Restriction of Springtime Releases

An alternative discussed involved limiting sustained releases from Hoover Dam in the spring period to 20,000 ft³/s. This kind of alternative is an effort to control floods while restricting releases from Hoover Dam to a level that results in lower Colorado River flows, essentially the same as have occurred over the last 20 years. This is not a viable alternative because restricting releases to this degree in the spring provides no flood protection and greatly increases the risk of extremely large flows.

2.2 Viable Alternatives

Nine alternative operating criteria were developed for evaluation (Table 1). Alternative number one is very similar to the existing operating criteria except releases are scheduled to begin on August 1 instead of October 1. This allows the requirements for January 1 flood control space in Lake Mead to be met without exceeding the 28,000 ft³/s nondamaging downstream channel capacity.

Other alternatives were developed by varying the required January l flood control space and the stepped release schedule. Detailed descriptions of how all nine alternatives were formulated is located in the main report under the section entitled "Formulation of Alternative Plans."

3. Description of the Existing Environment

3.1 General

A 337-mile reach of the lower Colorado River will be affected by the flood control operating criteria of Hoover Dam. (See map 423-300-1455 in main report.) The area lies within the Southwestern climate zone (Green and Sellers 1964), typified by midwinter and midsummer rains. Drought predominates in other seasons. Local rainfall rarely exceeds 4 inches per year. Summer temperatures often are greater than 110°F, and winter temperatures seldom drop below freezing. Terrain ranges from precipitous cliffs, where the river passes through or by mountain ranges, to low broad flood plains. An account of the area's history, geology, soils, and hydrology may be found in the Department of the Interior's water quality reports (U.S. Department of the Interior, 1975 and 1977). Extensive bibliographies covering the lower Colorado River are also available (Yates and Marshall, 1974; USDA-SCA 1976; Desert Research Institute, 1976).

3.2 Aquatic Habitat

Three major aquatic habitats are currently present along the lower Colorado River: large reservoirs, flowing river channels, and small backwaters.

Table 1 Alternative Plans

	January (1)	Maximum Controlled Release	Release Steps (1000 ft ³ /s)
1	5.35	73,000	19, 28, 35, 40, 73
2	5.67	73,000	19, 28, 35, 40, 73
3	4.50	73,000	19, 28, 35, 45, 73
4	5.35	28,000	19, 28
5	5.35	35,000	19, 28, 35
6	4.50	40,000	19, 28, 35, 40
7	4.50	50,000	19, 28, 35, 40, 50
8	7.50	73,000	19, 28, 35, 40, 73
9	5.35	73,000	19, 28, 35, 50, 73

⁽¹⁾ All alternatives require 1.5 MAF Storage Space on August 1.

Space building operations begin on August 1 for all alternatives.

Lake Mohave formed by Davis Dam, and Lake Havasu, formed by Parker Dam, are the major reservoirs south of Hoover Dam (Map No. 423-300-1455). The upper 20 miles of Lake Mohave remain a flowing environment. The remaining 47 miles of the lake are deeper and wider forming a lake environment. Small impoundments are formed by Headgate Rock and Imperial Dams.

Where not inundated by reservoirs, the river channel remains a flowing habitat. Unmodified reaches of the river channel range from 150 to 1,200 feet in width and up to 25 feet in depth. Most channelized or riprapped sections of the river are about 500 feet in width and 8 feet in depth.

Flows in the riverine reaches are determined by downstream water requirements and have not varied significantly since 1962. Average monthly flows vary seasonally and are highest in the spring and lowest in the winter (Figure 1). Reduced flows downstream result from diversions. Most of the water in the Colorado River is diverted upon reaching Imperial Dam. Flows in the channel below Imperial Dam result from irrigation return flows and ground water seepage. All water remaining in the river is diverted at Morelos Dam.

Daily fluctuations in water levels of 2 to 16 feet occur in riverine reaches below Hoover, Davis, and Parker Dams as water is released for daily power requirements. The magnitude of water level fluctuations lessens with distance downstream from the dams.

Many small backwaters occur along the river from Davis Dam to the Southerly International Boundary (SIE). Major backwater areas occur along the river within the Havasu National Wildlife Refuge, the Colorado River Indian Reservation, the Cibola National Wildlife Refuge, and the Imperial National Wildlife Refuge. Two additional backwaters, Gadsden Lake and Hunters Hole, are located along the river south of Yuma, Arizona.

Detailed descriptions of the limnology and aquatic flora and fauna occurring in these habitats can be found in studies by Minckley (1973 and 1976), Bryant (1976), Ponder (1975), Marshall (1976), Broadway and Herrgesell (1978), Priscu (1978), and the Arizona Cooperative Fishery and Research Unit (1975 and 1976). A list of fish species present in the Lower Colorado River System is shown in Table 2.

3.3 Terrestrial Habitat

The lower Colorado River flows through the lower Sonoran Life Zone. Vegetation surrounding Lake Mohave is characteristic of the Mohave Desert Scrub Community. Vegetation in this desert community is dominated by creosote bush (Larrea tridentata) and burro bush (Ambrosia dumosa). The formation of Lake Mohave eliminated the riparian zone on this reach of the river. However, small patches of riparian vegetation have developed along the shoreline of the lake. Salt cedar (Tamarix pentandra) is the dominant plant in the shoreline vegetation.

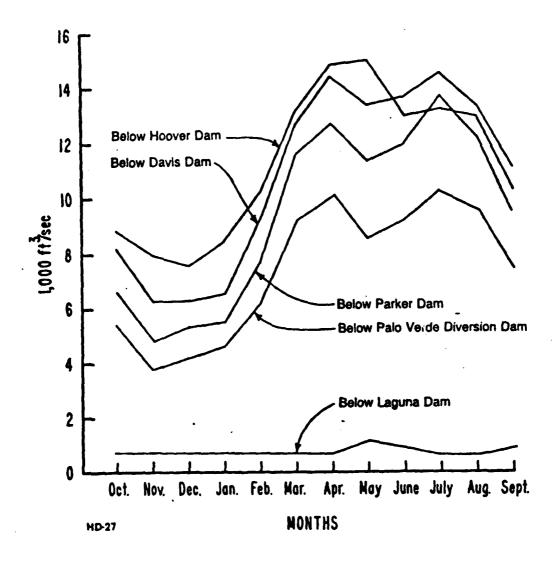


Figure 1. Average Monthly Flows Along the Lower Colorado River from 1967-1976.

Table 2

Major Fish Species in the Lower Colorado River From Hoover Dam to the Southerly International Boundary

Family	Species	
Catostomidae	Razorback sucker	Xyrauchen texanus
	Flannelmouth sucker	Catostomus latipinnis
Centrarchidae	Warmouth	Lepomis gulosus
	Green sunfish	Lepomis cyanellus
	Bluegill	Lepomis macrochirus
	Redear sunfish	Lepomis microlophus
	Largemouth bass	Micropterus salmoides
	Black crappie	Pomoxis migromaculatus
Cichlidea	Tilapia	Tilapia mossambica
	Zill's tilapia	Tilapia zilli
Clupeidae	Threadfin shad	Dorosoma petenense
Cyrinidae	Carp	Cyprinus carpio
_	Golden shiner	Notemigonus crysoleucas
	. Red shiner	Notropis lutrensis
	Goldfish	Carassius auratus -
	Bonytailed chub	Gila elegans
	Fathead minnow	Pimephales promelas
Elopidae	Machete	Elops Affinis
Ictaluridae	Yellow bullhead	Ictalarus natalis
	Channel catfish	Ictalarus punctatus
	Black bullhead	Ictalarus melas
	Flathead catfish	Pylodictis olivaris
Malilidae	Striped mullet	Mugil cephalus
Percichthyidae	Striped bass	Morone saxatilis
Pocilidae	Mosquito fish	Cambusia affinus
•	Sailfin mollie	Poecilia latipinna
	Mexican mollie	Poecilia mexicana
Salmonidae	Rainbow trout	Salmo gairdneri

The major terrestrial habitats that cruld be affected by changes in the flood control operating criteria of Hoover Dam occur between Davis Dam and the Southerly International Boundary (SIB). A total of 99,624 acres of riparian plant communities remain along this reach of the river (Table 3). These riparian communities have been divided into seven plant community types (Table 4). All community types, except marsh communities, were further divided into six structural types based on foliage volume (Table 5). The extent of all riparian plant communities within the flood plain below Davis Dam is shown on map sheets 1-23.

Detailed descriptions of the wildlife occuring along the lower Colorado River can be found in studies by Douglas (1977), Bradley and Deacon (1967), Anderson and Ohmart (1974, 1975, and 1976), and Vitt and Ohmart (1978). The species composition and seasonal densities of avian and small mammal populations occurring in riparian plant communities below Davis Dam is listed in the "Wildlife Use and Densities Report of Birds and Small Mammals in The Lower Colorado River Valley" (Anderson and Ohmart, 1977). A listing of the more common large mammals occurring along the lower Colorado River is shown in Table 6.

3.4 Special Status Species

The endangered Yuma clapper rail (Rallus longirostris yumanensis) inhabits marsh communities (map sheets 1-23) from Davis Dam to the SIB. The birds are generally migratory, arriving in late April and departing in late September. Breeding and nesting occurs from May through June (Ohmart and Smith, 1973). The winter range of the species is generally south of the SIB toward the Gulf of California. However, some rails winter north of the SIB in Topock Marsh, Topock Gorge, the Bill Williams River Delta, and on the Imperial National Wildlife Refuge. (Yuma Clapper Rail Recovery Team, 1977.)

The endangered bald eagle (Haliaetus leucocephalus) occasionally occurs on the lower Colorado River. A pair of these birds established a nesting territory on the Havasu National Wildlife Refuge near Topock Marsh in 1973. Although breeding behavior and nesting activities have been observed, no nesting attempts by this pair have yet been successful.

The California least tern (Sterna albifrons browni), the American peregrine falcon (Falco peregrinus anatum), and the brown pelican (Pelecanus occidentalis), are endangered birds which accidentally or occasionally visit the lower Colorado River. None of these species have known breeding sites in the study area.

Table 3
Total Acres of Riparian Vegetation From Davis Dam to the Southerly International Boundary

Structural Type

Community	I	II	III	IV	٧	VI	Total
Willow and/or Cottonwood	387	94	470	4448	2446	541	8386
Screwbean Mesquite-Salt Cedar		276	1880	13896	4615	362	21029
Honey Mesquite			1836	10553	4009	~~~	16398
Salt Cedar-Honey Mesquite			~	5985	2055	~	8040
Salt Cedar	107	191	338	25389	6948	2909	35879
Arrowweed			~			3989	3989
Marsh							5903 99624

Table 4
Vegetative Communities and Criteria Used in Classification

Community	Criteria
Willow and/or Cottonwood	Populus fremontii and/or Sali/ gooddingii constituting at least 20% of the total trees
Screwbean Mesquite-Salt Cedar	Prosopis pubescens constituting at least 20% of the total trees
Honey Mesquite-Salt Cedar	Approximately equal numbers of P. velutina and Tamarix chinensis
Salt Cedar	T. chinensis constituting 95-100% of total trees
Honey Meșquite	P. velutina constituting 95-100% trees
Arrowweed	Tessaria sericea constituting 95-100% of total vegetation in area
Marsh	Emergent aquatic vegetation, primarily Typha sp.

Table 5
Structural Types and Eriteria Used

Structural Type	Criteria
I	Three definite layers of vegetation with the majority of the vegetative volume at 20 feet or more.
11	Primarily one vegetative layer 20 feet or more.
III	No understory, with the canopy layer from 15-20 feet.
IV	A definite understory with the volume of the canopy from 10 to 15 feet.
v .	A sparse area with the majority of the vegetative column at 5 feet and canopy trees not higher than 10 feet.
IV	One layer of vegetation with the bulk of the volume between 0-5 feet.

Table 6

Large Mammals Occurring Along the Lower Colorado River From Hoover Dam to the Southerly International Boundary

Common Name Scientific Name Coyote Canis latrans Gray Fox Kit Fox Urocyon cinereoargenteus Vulpes velox Felis concolor Felis rufus Mountain Lion Bobcat Taxiden taxis Badger Procyon lotor Raccoon Striped Skunk Mephitis mephitis Sylvilagus auduboni Lepus californicus Desert Cottontail Black-tailed Jackrabbit Beaver Castor canadensis Muskrat Ondatra zibethica Mule Deer Odocoileus lemionus Bighorn Sheep Ovis canadensis . Feral Burro Equus asinus

The bonytail chub (Gila elegans) has been officially listed as an endangered species by the Fish and Wildlife Service (FWS) as of April 24, 1980. This species may be extirpated from the lower Colorado River except for a few remaining adults in Lake Mohave and Lake Havasu (Minckley, 1973).

On May 27, 1980 the FWS withdrew its April 24, 1978 proposal to list the razorback sucker (Xyrauchen texanus) as a threatened species. Large numbers of this species remain in Lake Mohave (Bryant, 1976). The status of populations below Lake Mohave is unknown as few records have been recorded since 1962 (Minckley, 1973 and 1976). However, recent sampling efforts by California Department of Fish and Game indicate a substantial population of this species occurs in Senator Wash Reservoir (personal communication, Bill Loudermilk, California Department of Fish and Game).

3.5 Archaeological Resources

The lower Colorado River has not been extensively surveyed for cultural resources. The major studies are by Albert Schroeder (1951); Brooks, Alexander and Crabtree (1969/70); and Malcolm Rogers (1939, 1945). Schroeder carried out an extensive survey of the area from Davis Dam to the SIB. He gives a clear account of what is known of the movements and boundaries of the historic tribes of the lower Colorado area dating from 1540 A.D.

Schroeder described three different types of prehistoric sites on the lower Colorado River: farm campsites, permanent farm sites, and trail campsites. The farm campsites were seasonally occupied areas on sand dunes above or adjacent to the river's flood plain and were often located close to mesquite (Prosopis juliflora) and/or screwbean (Prosopis pubescens) groves. These sites were not termed permanent sites due to the small amount of material recovered, implying a short occupation period. Also these sites were situated on sand dunes that would have been isolated periodically during floods, therefore inhibiting year-round occupation.

The permanent farm sites are situated on the edge of the flood plain out of a normal flood danger. These sites were termed permanent because of their more extensive land area and materials recovered (Schroeder, 1951).

The trail campsites differ from the two previously mentioned sites in that they do not occur on sand dunes. They are situated away from the river in canyons, or in mountainous areas not suitable for farming. They also differ from the other sites in the small quantities of material recovered. The trail sites might well have been overnight stops or seasonal plan gathering camps (Schroeder, 1951).

The paucity of sites located in the flood plain along the lower Colorado River is most likely due to the tremendous floods the river caused prior to the building of the dams. Any cultural sites or evidence of aboriginal occupation not destroyed or buried by alluvial silt probably has been obliterated by the heavy equipment which leveled the land along the river for agricultural uses.

4. General Effects of High Flows on Fish and Wildlife Resources

Higher flows along the lower Colorado River will have positive and negative effects on terrestrial and aquatic environments. The nature of the effects will depend on the capacity of the river channel and the magnitude and duration of flow.

4.1 Vegetation

Five factors are important in determining the effect of changing water levels on plant communities (Teskey and Hinckley, 1977).

- 1) Time of year Flooding during the growing season reduces growth rate of plants and can result in death to species with low tolerance to flooding. In areas subject to drought, flooding during the dormant season (fall-winter) increases soil moisture during the growing season. This additional soil moisture is beneficial to plant growth.
- 2) Flood Duration Trees flooded for 1 month or less in the beginning of the growing season are often damaged and show the following symptoms: leaf chlorosis, leaf wilt, premature leaf drop, and diversed ratio. The amount of damage is related to the flood tolerance of the species. If the trees are not killed before the flood waters receed, recovery is usually rapid. Long term flooding (6 months or more) results in higher mortality. Most bottomland tree species cannot survive 2 years of continuous flooding.
- 3) Water depth Water depth is most critical for seedlings and herbaceous species since water often covers them. If seedlings have not leafed out before flooding, they will often remain dormant until flood water receeds. If seedlings are not killed by the flood, they can leaf out again after floodwater receeds.
- 4) Sediment deposition plays an important role in plant survival. Floodwaters deposit clay, silt, and sand in low-lying areas. This can kill plants and reduce growth rates. Sediment deposition can also be beneficial by increasing long term productivity of the soil.

The impacts of flooding on plant communities also depends on the tolerances of individual species to flood damage. Three of the major tree species along the Colorado River (cottonwood, willow, and salt cedar) are very tolerant to damage by inundation (Teskey and Hinckley, 1977; Warren and Turner, 1975). The flood tolerance of screwbean and honey mesquite trees is not known.

4.2 Wildlife

All species of wildlife are initially displaced by rising water levels. Short term flooding (less than one month) can significantly reduce some small mammal populations (Blair, 1939; Blem and Blem, 1975; McCarley, 1959; and Stickel, 1948). Arboreal species are less susceptible to impact than those species that are strictly ground dwelling.

Large mammals capable of avoiding rising water levels are impacted less than small mammals. Bird populations are probably least affected by short term flooding, although some ground and marsh nesting species (e.g., Gambel's quail and Yuma clapper rail) could be affected.

Generally, the longer an area is inundated the greater the impact on terrestrial wildlife. After water levels receed, wildlife populations have the capacity to recover. Time required would vary with the species.

Flooding in the spring when many species are breeding is potentially more detrimental than flooding during other seasons of the year. Young are more suseptible to floodwaters and loss of large numbers of young (or reproductive attempts) could have a greater effect on populations. Disruption of breeding by the Yuma clapper rail would be of particular concern on the lower Colorado River.

Long term losses of wildlife populations as a result of flooding will not occur unless the duration of inundation results in the death of plant communities. In the event of habitat loss, recovery of wildlife populations would be related to the rate of succession of riparian plant communities. This is a very slow process and the time required would be measured in years.

4.3 Fish

Floods are a normal part of all stream ecosystems. Even though aquatic fauna have adapted to flowing water, high flows on the lower Colorado River will have both positive and negative effects (Grizzell, 1976). Potential benefits of higher flows are:

1) Existing flows in the Colorado River are so low at times during the year (figure 1) that water quality (low dissolved

oxygen, high temperatures, high salinities), especially in backwaters, is below that required for good fish production. Flows below Laguna Dam are very low year-round. Higher sustained flows in the river would raise water levels and improve the quality of fisheries habitat.

- 2) Daily fluctuations in water levels in riverine reaches below major dams is detrimental to productivity and reproduction. Sustained releases over that required for power would reduce daily water level fluctuations.
- 3) Many backwaters isolated from the river provide poor fisheries habitat because of low water quality and enchoachment of vegetation. Higher flows could scour and freshen such backwaters improving the quality of fisheries habitat.

Potential negative effects of higher flows are:

- 1) At sustained higher flows, water velocity increases and the capacity of water to carry sediment deposits increases. Sediment deposition can directly affect fisheries by covering the bottom with a blanket of materials that kills bottom fauna, reduces food availability, and covers nests and spawning grounds.
- 2) If sustained flows are high enough, the capacity of the river to scour the bank and bottom is such that physical disruption of aquatic habitats occurs, e.g. changes in the course of the river channel or complete sediment deposition of backwaters.
- 3). Sustained higher flows in the spring when many species are spawning is potentially more detrimental than high flows during other seasons of the year.

5. Assessment of Higher Flows and Comparison of Alternatives

The magnitude of releases in the future will depend on the flood control operating criteria and the amount of spring runoff in the Colcrado River Basin. The projected 1 month releases for each alternative operating criteria under different basin runoff conditions are shown in Tables 7, 10, 12, and 14. As a reference to gauge possible effects of higher flows on vegetation, map sheets 1-23 show the area inundated by 50,000 ft³/s sustained flow and an approximate noninundating channel capacity (that sustained flow that can be carried in the existing channel without inundating a significant amount of terrestrial vegetation).

5.1 Hoover Dam to Davis Dam

5.1.1. Existing Channel and Flow Regime

Lake Mohave now forms this reach of the lower Colorado River. The river in the upper portion of the reach remains a flowing environment. Daily peak flows reach 35,000 ft /s in the summer. Minimum daily flows of 2,000 ft /s occur in the winter. Water levels fluctuate up to 16 feet daily in upper Lake Mohave.

Lower Lake Mohave is operated annually between 630 and 647 feet elevation at Davis Dam. Daily water releases from Hoover Dam do not significantly affect water levels in lower Lake Mohave.

5.1.2. Vegetation and Wildlife

The river channel in upper Lake Mohave is capable of carrying 40,000 ft 3 /s. Projected sustained flows for all alternatives (Table 7) are less than the existing channel capacity. Projected 1 month sustained releases for flood events that could be expected to occur once every 100 years for all nine alternatives range from 28,000 - 35,000 ft 3 /s. Releases within this range will cause no significant impacts to terrestrial vegetation or wildlife along this reach.

Lower Lake Mohave is currently operated between elevations 630 and 647 annually. No changes in the range of water levels is projected for excess water conditions for any of the alternative operating criteria. Thus, no impact to terrestrial vegetation or wildlife is expected along the shore of lower Lake Mohave with any flood control operating criteria.

5.1.3. Fish

Only two species of fish native to the Colorado River remain in the upper Lake Mohave, the razorback sucker and bonytail chub. Adult razorback suckers are present in substantial numbers (Bryant, 1976); however, it is not known if this species is reproducing under current conditions. Status of the bonytail chub is unknown. Excellent populations of rainbow trout are maintained by regular stocking of fish from Willow Beach National Fish Hatchery. No natural reproduction of this species is known to occur.

It is difficult to determine whether the change in the flows in upper Lake Mohave will have a net positive or negative effect on the fish present. The native species are adapted to high flow, turbid waters, and probably would be less affected than trout which are not adapted to high turbidity and high sediment loads. Examination of projected flow regimes (Table 7) indicates that the aquatic environment in upper Lake Mohave, under conditions requiring flood control releases would be essentially the same for all alternatives.

Table 7

Projected Sustained 1 Month Flows (in ${\rm ft}^3/{\rm s}$) in the Riverine Reaches from Hoover Dam to Lake Havasu for 9 Alternative Hoover Dam Flood Control Operating Criteria

Alternative Flood Control Operating Criteria

Ē	Flood Frequency In Years 1/	-	2	m	. 4	5	9	7	∞ (6	Range
	100	35,000	35,000	35,000	29,000	35,000	35,000	35,000	28,000	35,000	28,000-35,000
F_2	20	35,000	35,000	35,000	28,600	35,000	35,000	35,000	28,000	35,000	28,000-35,000
5	. 20	29,500	29,500	29,500	28,300	28,800	29,200	29,200	28,000	29,200	28,000-29,500
	10	28,000	28,000	28,000	28,000	28,300	28,000	28,000	28,000	28,300	28,000-29,500
	ي.	27,100	27,100	27.000	28,000	28,000	27,000	27,300	28,000	28,000	27,000-28,000
	2	18,700	17,800	17,800	18,700	17,700	18,000	17,700	19,000	18,500	17,700-19,000

That flow that could be expected to occur an average of once in the designated number of years. 7 The aquatic environment of lower Lake Mohave will not be significantly altered by flood control releases projected during years of excess water in the basin. Existing releases cause underflowing along the bottom of the lake which is exited via the penstocks of Davis Dam. (Priscu, 1978). Flood control releases will follow this pattern and should not significantly change the existing limnological conditions of the lake.

5.2 Davis Dam - Lake Havasu

5.2.1. Existing Channel and Flow Regime

The channel from Davis Dam to Topock, Arizona has been dredged and riprapped. The remaining channel through Topock Gorge has not been dredged or riprapped. Daily summer peak flow gates below Davis Dam and at Topock, Arizona are 26,000 ft /s and 17,000 ft /s respectively. Summer minimum flows vary from 9,000-10,000 ft /s at both locations. Daily fluctuations in water level of up to 5 feet occur.

5.2.2. Vegetation and Wildlife

The river channel in this reach is capable of carrying sustained flows of approximately 28,000 ft /s (map sheets 1-5). Flows of this magnitude will begin to cause 3 water levels to rise into surrounding vegetation. A sustained flow of 50,000 ft /s will raise water levels approximately 7 feet above normal at Topock, Arizona (map sheet 4) and inundate 5,655 acres of riparian vegetation along this reach (Table 8). The majority of vegetation inundated in this reach by a 50,000 ft /s flow results from the enlargement of the Topock Marsh backwater (map sheets 3 & 4).

Current operating criteria of Parker Dam require levels of Lake Havasu be reduced with increasing releases from Davis Dam (U.S. Bureau of Reclamation, 1977). This would decrease the area inundated by sustained high flows through Topock Gorge but increase the probability of scour in the lower end of the Gorge. With sustained flows greater than 20,000 ft⁻/s, physical disruption of marshes in the lower portion of the Gorge could begin to occur.

Projected one month sustained flows for all alternatives for 2 through 20 year flood events along this reach are essentially the same (Table 7). Under 50 and 100-year flood events, alternatives 4 and 8 result in 29,000 ft /s and 28,000 ft /s releases. All other alternatives result in 35,000 ft /s releases. Sustained releases of 28,000 ft /s and 35,000 ft /s result in approximately 2½ and 3½ foot rises in water level above normal spring high water levels at Topock, Arizona (map sheet 4). Thus, the difference in water level rise at Topock, Arizona, between alternatives 4 and 8 and other alternatives could be approximately 12 inches.

Table 8

Number of Acres of Each egetation Type Inundated By 50,000 ft 1/s Sustained Flow From Davis Dam to Lake Havasu

Structural Type

Community Type	H	11	111	IV	>	VI	Total
Willow and/or Cottonwood				553	1	}	553
Screwbean Mesquite-Salt Cedar	}	;	169	511	24	22	726
Honey Mesquite	1	-	161	185	25	ţ	371
Salt Cedar	1	!	!	25	1		25
Salt Cedar	67	1 (187	913	7.5	728	1952
Arroweed	-	l f t	1	}		80	80
. Marsh	f 1 1	1		1	† †	1948	1948

Rises in water level of 2½ and 3½ feet will not overtop the retention dike at the south end of Topock Marsh. However, rises in water level within the marsh will occur as a result of high ground water levels and seepage through the dike. Differences in water level rise at the marsh between alternatives 4 and 8 and other alternatives for 50- and 100-year flood events would be less than 12 inches.

All alternatives result in releases along the reach, higher than have occurred in the recent past. The differences in magnitude of flows and rises in water between alternatives are not great enough to distinguish significant differences in impacts to vegetation and wildlife along this reach.

5.2.3 Fish

All alternative operating criteria will result in sustained releases higher than experienced in the past (Table 7). Sustained higher flows in the riverine reach from Davis Dam to Lake Havasu could improve aquatic habitats by reducing daily water level fluctuations. Rises in water levels and some increased scouring as a result of higher continued releases could benefit aquatic habitats in the backwaters of Topock Gorge by reducing sedimentation and vegetation encroachment and improving water quality.

Flows of 28,000 ft³/s and above will begin to cause an enlargement of the backwater in Topock Marsh. An increase in water levels would improve water quality and be predominantly beneficial to aquatic habitats within Topock Marsh.

Under current operating criteria of Parker Dam water levels of Lake Havasu are lowered with increasing releases from Davis Dam. This generally would not affect aquatic habitats in the lake unless sustained releases reach $40,000~\rm ft^2/s$. At this magnitude of release lake levels must be lowered to the minimum elevation of $440~\rm feet$. This results in a six foot drop in the levels below normally experienced low water. Should this condition occur during the spring, spawning activities of largemouth bass could be disrupted.

Examination of projected flow regimes (Table 7) indicates that the changes in the aquatic environments from Davis Dam to Lake Havasu under excess water conditions would be essentially the same for all alternative flood control operating criteria.

5.3 Parker Dam to Palo Verde Dam

5.3.1 Existing Channel and Flow Regimes

The 14-mile reach of river channel from Parker Dam to Headgate Rock Dam has not been channelized (map sheets 8 and 10). The lower two-thirds of this portion of the reach is Lake Moovalya, the backwater of Headgate Rock Dam. Daily summertime flows range from a peak of 18,000 ft 3/s

to a minimum of 4,000 - 6,000 ft³/s. Water levels fluctuate daily up to 6 feet below Parker Dam, up to 3 feet, 4 miles below the dam, and are reduced to 1 foot within Lake Moovalya, 7 miles below the dam. The low daily water level fluctuations over much of this reach have resulted in extensive recreational and residential development.

The river channel from Headgate Rock Dam to 1 mile below Agnes Wilson Road (map sheets 10 and 11) has been channelized. The remainder of the riverine reach to Palo Verde Dam is unaltered (map sheets 11-13). Buily summertime flows below Headgate Rock Dam range from a peak of 17,000 ft /s to a minimum of 3,000 ft /s. Daily summer time peak flows have attenuated to a peak of 13,000 ft /s with a minimum flow of 4,000 ft /s above Palo Verde Dam. Water levels fluctuate up to 5 feet daily below Headgate Rock Dam. These fluctuations have attenuated to several feet above Palo Verde Dam.

5.3.2 Vegetation and Wildlife

The river channel is capable of carrying sustained releases of approximately 28,000 ft³/s and 20,000 ft³/s without inundating a significant amount of terrestrial vegetation between Parker Dam and Headgate Rock Dam, and between Headgate Rock Dam and Palo Verde Dam (map sheets 8-13). Sustained flows up to channel capacity could benefit riparian plant communities by raising ground water levels.

A sustained 50,000 ft³/s release could raise water levels approximately 7 feet and inundate 8,535 acres (Table 9) of riparian vegetation from Parker Dam to Palo Verde Dam. Sustained flows of 30,000 ft³/s would raise water levels approximately 3 feet above normal high water levels between Parker and Headgate Rock Dams. The extensive development and almost total lack of any riparian vegetation in this portion of the reach (map sheets 8 and 10) minimize the potential for impacts to riparian vegetation and wildlife of releases above 28,000 ft³/s.

Thirty thousand ft³/s sustained releases will result in water level rises of approximately 4 feet above current high water levels between Headgate Rock Dam and Agnes Wilson Road (map sheets 10 and 11). Much of the channel at this portion of the reach is confined by high banks or leyees. The major riparian plant community inundated by releases above 20,000 ft³/s will be the Screwbean Mesquite - Salt Cedar community on Deer Island (map sheet 10).

The majority of the riparian plant communities inundated by 50,000 ft 3 /s release along this reach occur between Agnes Wilson Road and Palo Verde Dam. Thirty thousand ft 3 /s releases will result in water level rises of approximately 5 feet along this reach.

The potential for erosive damage by higher flows from Agnes Wilson Road to Palo Verde Dam is high. Bank erosion, realinement of the river channel, and some physical diszuption of plant communities is possible with sustained flows above 20,000 ft /s.

Table 9

Number of Acres of Each Vegetation Type Inundated by a 50,000 ft^{3/}s Sustained Flow From Parker Dam to Palo Verde Dam

Total 1108 4989 391 154 463 329 8535 1101 --- 329 463 133 150 182 1 ! 7 Vegetational Structure Type 285 126 83 703 500 1 3349 265 2 193 7 451 III 980 242 I 30 ! i i ! 1 Screwbean Mesquite-Salt Cedar Salt Cedar-Honey Mesquite Willow and/or Cottonwood Plant Community Plant Honey Mesquite Salt Cedar Arrowweed Marsh

The second secon

Projected sustained flows for 2- through 100-year flood events along this reach are essentially the same for all alternatives (Table 10). All alternatives operating criteria result in releases along this reach higher than have occurred in the recent past. The differences in magnitude of flows and rises in water between alternatives are not great enough to distinguish significant differences in impacts to vegetation and wildlife along this reach.

5.3.3 Fish

All alternative operating criteria will result in sustained releases higher than experienced in the past for 5-year and greater flood events (Table 10). Sustained releases up to the channel capacity below Parker Dam could improve aquatic habitats by reducing daily water level fluctuations. With increasing releases up to and above channel capacity, Lake Moovalya will become more riverine than lakelike. Whether this would result in generally positive or negative impacts to aquatic fauna in the lake is problematic. However, at releases above 28,000 ft³/s scouring of banks and movement of bottom sediment deposits could result in negative effects on the aquatic environment of Lake Moovalya.

Sustained releases up to the noninundating channel capacity (20,000 ft³/s) between Headgate Rock Dam and Palo Verde Dam will have predominately positive effects on the riverine and backwater habitats. Such releases would reduce daily water fluctuation in the-channel and improve water quality in backwaters. At higher sustained releases the potential for negative impacts to aquatic habitats increases. Releases above 20,000 ft³/s could begin to physically disrupt banks and transport bottom sediment deposits.

Examination of projected flow regimes (Table 10) indicates that the change in the aquatic environment from Parker Dam to Palo Verde Dam, under excess water conditions, would be essentially the same for all alternatives.

5.4 Palo Verde Dam to Imperial Dam

5.4.1 Existing Channel and Flow Regimes

The river channel from Palo Verde Dam to Taylor Ferry (map sheets 13-16) has been improved and stabilized. Daily summertime flows range from a peak of 12,000 ft /s to a minimum of 5,000 ft /s. Daily water levels fluctuate up to 3 feet.

The river channel from Tavlor Ferry to Adobe Ruins (map sheets 16 and 17) encompasses the Cibola cut and, except for the lower end, has been aligned and stabilized. Daily summertime peak and minimum flows are similar to those below Palo Verde Dam. Most of this portion of the reach is within the Cibola National Wildlife Refuge.

Table 10

Projected Sustained 1 Month Flows in the Riverine Reaches from Parker Dam to Palo Verde Dam for 9 Alternative Hoover Dam Flood Control Operating Criteria.

Alternative Flood Control Operating Criteria

Exceedi	Exceedance Interval in Years 1	ŧ .	2	e	4	N.	و	-	€0	6	Range
	100	32,100	32,300	32,300	28,000	32,100	32,300	32,300	28,000	32,000	28,000-32,300
•	20	32,000	32,000	32,000	28,000	32,000	32,000	32,100	28,000	32,000	28,000-32,000
E-	20	28,000	26,900	26,800	27,800	28,000	26,800	26,800	26,400	28,000	26,400-28,000
30	10	26,300	26,000	25,500	26,100	26,300	25,700	25,700	26,000	26,300	25,500-26,300
		24,400	24,400	24,300	24,400	24,300	24,500	24,300	24,800	24,000	24,000-24,800
	, ~	15,700	15,500	15,000	15,300	15,300	15,700	15,300	15,700	15,300	15,000-15,700

 $^{1\!\!1\!\!1}$ That flow that could be expected to occur an average of once in the designated number of years.

The river channel from Adobe Ruins to Imperial Dam has not been altered(map sheets 17-20). Summertime flows range from 9,000 to 12,000 ft /s. Daily fluctuations in water level has been reduced to less than 1 foot. Most of this portion of the reach is located within the Imperial National Wildlife Refuge.

5.4.2 <u>Vegetation and Wildlife</u>

The approximate noninundating channel capacities from Palo Verde Dam to Taylor Ferry, Taylor Ferry to Adobe Ruins, and Adobe Ruins to Imperial Dam are 20,000, 28,000, and 17,000 ft 3 /s respectively (map sheets 13-20). Sustained flows up to 20,000 ft 3 /s over the entire reach would be predominantly beneficial to riparian vegetation through augmentation of ground water.

A sustained 50,000 ft³/s release will raise the water level 8-11 feet and inundate 14,514 acres of riparian vegetation from Palo Verde Dam to Imperial Dam (Table 11).

Sustained flows of 30,000 ft³/s will also raise water levels 7 feet above current high water marks between Taylor Ferry and Adobe Ruins (map sheets 16 and 17). Because of the Cibola cut the river channel in this reach has high banks and is closely confined by levees. Releases above 28,000 ft³/s will begin inundating vegetation and reach the levee, with depth of water rather than area inundated, being the major difference between flows up to 50,000 ft³/s. Releases above 20,000 ft³/s will begin to form a backwater on the west side of the river above Adobe Ruins (map sheet 17).

Sustained flows of $30,000 \, \mathrm{ft}^3/\mathrm{s}$ will cause rises in water level of 5 feet above current high water marks between Adobe Ruins and Imperial Dam. The potential for erosive damage in this portion of the reach is high. As flows increase above $20,000 \, \mathrm{ft}^3/\mathrm{s}$, realinement of the river channel could occur. The possibility of avulsive channel movements is highest where the river bends sharply at Martinez Lake (map sheet 19).

Under existing flows, deposition of riverborne sediment at Imperial Dam has created problems in maintaining sufficient head for water deliveries to the Yuma Main Canal. Dredging above the upper face of the dam has been necessary to remove sediment. Higher flows will carry many times the sediment load of existing flows. At higher flows the potential for damage to plant communities, especially marshes, from sediment deposition exists in the lower portions of this reach (map sheets 19 and 20).

Table 11

Number of Acres of Each Vegetation Type Inundated By $50,000~\rm{ft}^3/s$ Sustained Flow Palo Verde Dam to Imperial Dam

47.5

Total

2046

1699

28

1574

7127

		Structur	Structural Type			
Community Type	I	11	iii	ΛI	>	IA
Willow and/or Cottonwood	-	18	337	1246	57	41
Screwbean Mesquite-Salt Cedar	1	i	1	1649	216	181
Honey Mesquite	ł	!	!	28	ł	1 1
Salt Cedar-Honey Mesquite	!	;	ļ	1569	5	i
Salt Cedar	!	ļ	18	6242	977	91
Arrowweed	!	1	ļ	i	.	47

1993

47

Marsh

Projected one-month sustained flows for 2 through 100-year flood events along this reach are very similar for all altermatives (Table 12). All alternative operating criteria result in releases along this reach higher than have occurred in the recent past for flood events that could be expected to occur once in every 5 through once in every 100 years. The differences in magnitude of flows and rises in water level between alternatives are not great enough to distinguish significant differences in impacts to vegetation and wildlife along this reach.

5.4.3 Fish

Sustained releases up to 20,000 ft³/s will have predominately positive effects on the riverine and backwater habitats from Palo Verde to Imperial Dam. Daily water level fluctuations would be reduced in the upper portions of the reach and water quality in the backwater improved. At higher sustained flows the potential for movement of bottom sediment deposits, sedimentation and physical disruption of aquatic habitats increases.

The potential for physical disruption of backwaters and riverine habitats is highest from Adobe Ruins to Imperial Dam (map sheets 17-20). Many of these backwaters are isolated from the river and are stagnating. Some scouring and increased exchange of water with the river would improve the aquatic habitat in the backwaters. However, excessive scouring or sediment deposition would be detrimental:

All alternative operating criteria will result in flows higher than experienced in the recent past for 5-year and greater flood events. Examination of the projected flow regime (Table 12) indicates that the change in the aquatic environment from Palo Verde Dam to Imperial Dam, under excess water conditions, would be essentially the same for all alternatives.

5.5 Imperial Dam to the Southerly International Boundary

5.5.1 Existing Channel and Flow Regimes

The river channel from Imperial Dam to the SIB (map sheets 20-23) has not been channelized. Flow in the river below Imperial Dam consists of return flows from the All-American Canal Desilting Works and small amounts of water used from occasional sluicing of sediment deposits into the Laguna settling basin. Return flow from irrigated areas reaches the river below Laguna Dam. The resulting year-round flow at Yuma, Arizona is approximately 500 ft /s. Flows of 4,000 ft /s, lasting several days, typically occur once a year when water released from Parker Dam exceeds available storage at Imperial Dam. All water in the river channel is diverted at Morelos Dam (map sheets 22 and 23).

Table 12

Projected Sustained 1 Month Flows in the Riverine Reaches from Palo Verde Dam to Imperial Dam for 9 Alternative Hoover Dam Flood Control Operating Criteria

Alternative Flood Control Operating Criteria

Exceedand Year	Exceedance <u>I</u> nterval in Years <u>I</u>	in 1	2	ო	4	Ŋ	9	7	∞	თ	Range
100		31,500	31,600	31,600	26,700	31,400	31,500	31,500	26,700	31,400	26,700-31,600
20		31,400	31,400	31,500	26,500	31,300	31,300	31,500	26,600	31,400	26,500-31,500
20	0	26,800	25,900	25,500	26,400	26,800	25,500	25,700	25,100	26,800	25,100-26,800
•		25,000	24,700	24,400	25,000	25,000	24,500	24,900	25,000	25,300	24,400-25,300
E-34	ı vo	23,800	23,700	23,900	23,800	23,700	23,800	23,900	24,300	23,800	23,700-24,300
	2	14,500	14,500	14,400	14,700	14,700	14,700	14,700	15,100	14,700 .	14,700 . 14,400-15,100
•							, , , , , , , , ,	10 + c a a + a a l	seem to common bottonings of the seems	e vos	

<u>1</u>/ That flow that could be expected to occur an average of once in the designated number of years.

5.5.2 <u>Vegetation and Wildlife</u>

Analysis of cross sections in this reach indicate the noninundating channel capacities from Imperial Dam to Laguna Dam and from Laguna Dam to the SIB are 17,000 and 5,000-9,000 ft³/s, respectively.

Sustained flows up to the noninundating channel capacities will be predominantly beneficial to riparian plant communities and wildlife through augmentation of ground water.

A sustained release of 50,000 ft³/s will inundate 8,330 acres of riparian vegetation along this entire reach (Table 13). A large proportion of the vegetation inundated by such a release is located between Imperial Dam and Laguna Dam (map sheet 20). There is very little elevational differential in the land surface in this area, thus flows above 17,000 ft³/s will begin to inundate the entire area.

Sustained flows between 5,000-9,000 ft³/s will begin inundating some areas of ripagian vegetation between Laguna Dam and the SIB. Flows of 15,000 and 30,000 ft³/s result in rises of 8 and 12 feet above normal water levels. Because of the extremely low past flow in this portion of the reach and the resulting encroachment of rigarian vegetation adjacent to the river channel, flows approaching 15,000 ft³/s will inundate all existing vegetation from Laguna Dam to SIB (map sheet 20-23). The potential for physical disruption of plant communities and impacts-due to scouring is high with flows above 15,000 ft³/s.

Projected one-month sustained flows (Table 14) are essentially the same for all alternatives for flood events that could be expected to occur once every 2 through once every 20 years. For 50- and 100-year flood event alternatives, 4 and 8 have lower projected flows (agproximately 21,000 ft /s) than the other alternatives (approximately 28,000 ft /s).

Flows above 17,000 ft³/s will begin inundating most of the plant communities between Imperial and Laguna Dams. Flows of 15,000 ft³/s will raise water levels 8 feet and inundate all the vegetation from Laguna Dam to the SIB. Even with the difference in magnitude of projected flows at the 50- and 100-year flood events, all alternatives could result in flows that will inundate literally all the vegetation along this reach. Thus, no significant differences in impacts on vegetation and wildlife between alternatives are expected between Imperial Dam and the SIB.

Because of the small size of the river channel and proximity of vegetation, the probability of impacts to vegetation and wildlife under conditions of excess water is high under any of the alternative flood control criteria from Laguna Dam to the SIB.

Table 13

Number of Acres of Each Vegetation Type Inundated by $50,000~{\rm ft}^3/{\rm s}$ Sustained Flow From Imperial Dam to the Southerly International Boundary

\$

•	Type
	-
	Ø
	ŭ
	J
	u
	S
	J
	1
	u
	လ

Community Type	н	II	III	IV	Λ	VI	Total
Willow and/or Cottonwood	1		80	437	337	1	782
Screwbean Mesquite-Salt Cedar	!	;	168	1214	24		1406
Honey Mequite	i	}	1	1		1	•
Salt Cedar-Honey Mesquite	•	1	! !	-	-	ļ	ł
Salt Cedar	}	1	}	4048	620	181	6787
Arroweed	}	!	1	}	!	514	415
Marsh	1	}	1	}	!	878	878
							-

5.5.3 Fish

Sustained flows up to 5,000 to 9,000 ${\rm ft}^3/{\rm s}$ could be predominantly beneficial to riverine and backwater fisheries habitat, particularly below Morelos Dam. The potential for detrimental effects to existing riverine habitats from Lagyna Dam to SIB from physical disruption, increases for flows above 10,000 ${\rm ft}^3/{\rm s}$. Aquatic habitats of Hunters Hole and Gadsden Lake backwaters (map sheet 23) could be improved by some scouring and increased exchange of water with the river. However, excessive scouring or sediment deposition would be detrimental.

All alternative operating criteria will result in flows higher than experienced in the recent past for flood events that could be expected to occur once every 2 through once every 100 years. Examination of the projected flow regime (Table 14) indicates that the changes in the aquatic environments from Imperial Dam to the SIB under excess water conditions would be essentially the same for all alternatives.

A STATE OF THE PARTY OF THE PAR

5.6 Archaeological Resources

The extremely large floods that occurred along the lower Colorado River prior to the construction of any dams resulted in very few archaeological sites being located in the flood plain of the Colorado River. Because of the historic floods and depositional action of the river and the extensive use of agricultural equipment in the flood plain since dam construction, the flood plain area has a very low potential for any cultural resources.

Based on the above evidence we have concluded that the area inundated by a 50,000 ft /s sustained release (map sheets 1-23) does not encompass any properties that are on, or eligible for, inclusion on the National Register of Historic Places (Federal Register, Vol. 43, No. 26). All the alternative Hoover Dam flood control operating criteria have the capacity to control over 100-year flood events with releases substantially less than 50,000 ft /s. Thus, no significant differences in impacts to archaeological resources between alternatives can be determined.

6. Summary

The preceding comparison of existing noninundating channel capacities, current river flows, a 50,000 ft /s sustained flow, and projected river flows for alternative Hoover Dam flood control operating criteria under different runoff conditions in the Colorado River Basin provide an insight into how terrestrial and aquatic habitats along the lower Colorado River will be changed by higher flows. These comparisons also indicate that significant differences in environmental effects between alternatives cannot be shown based on the projected flows. Several points can be made:

Table 14

Projected Sustained 1 Month Flows in the Riverine Reaches from Imperial Dam to the Southerly International Boundary for 9 Alternative Hoover Dam Flood Control Operating Criteria

Alternative Flood Control Operating Criteria

ž	Exceedance Interval in years 1/		2	က	4	'ss	9	7	ಐ	6	Range
l	001	27,800	27,800	27,900	21,400	27,900	27,900	27,900	21,200	27,700	21,200-27,900
	20	27,700	27,700	27,900	21,400	27,800	27,790	27,800	21,000	27,700	21,000-27,900
	20	21,800	21,700	21,700	20,900	22,100	21,700	21,700	20,700	22,400	20,700-22,400
F-	01	20,500	20,600	20,600	20,700	20,700	20,700	20,700	20,700	20,600	20,500-20,700
3 0	S	20,000	20,000	20,000	20,600	20,500	20,100	20,100	20,100	20,500	20,000-20,500
	2	11,000	11,000	11,000	11,000	10,700	11,300	11,300	11,600	11,300	10,700-11,600

That flow that could be expected to occur an average of once in the designated number of years. \Rightarrow

- 1. Sustained releases up to 20,000 ft³/s would be predominately beneficial to terrestrial and aquatic habitats from Davis Dam to Imperial Dam. As flows increase above 20,000 ft³/s, potential for damage to terrestrial and aquatic habitat increases, especially through Topock Gorge, from Agnes Wilson Road to Palo Verde Dam, and from Adobe Ruins to Imperial Dam.
- 2. Below Imperial Dam sustained flows of 5,000-9,000 ft³/s will be predominately beneficial to terrestrial and aquatic habitats. As flows increase above 10,000 ft³/s the potential for damages to terrestrial and aquatic habitats increases along this reach. Because of the current channel conditions, the low past flow regime, and the proximity of vegetation to the river, the potential is high for some long term impact to terrestrial habitats below Imperial Dam.

7. Consultation and Coordination

Appendix G contains the mailing list for review of the draft review report which included this document, the comments received on the draft, and any responses to these comments.

Literature Cited

- Anderson, B.W. and R.D. Ohmart, 1974. Vegetation Management Studies. Annual Report. U.S. Bureau of Reclamation. Boulder City, Nevada 55 pp (mimeo).
- , 1975. Vegetation Management Studies. Annual Report. U.S. Bureau of Reclamation. Boulder City, Nevada 107 pp (mimeo).
- , 1976. Vegetation Management Studies. Annual Report. U.S. Bureau of Reclamation. Boulder City, Nevada 400 pp.
- , 1977. Wildlife Use and Densities Report of Birds and Mammals in the Lower Colorado River Valley, 1977. U.S. Bureau of Reclamation. Boulder City, Nevada 301 pp.
- Arizona Cooperative Fishery Research Unit, 1975. Final Report: Fisheries Potential of Dredged Backwaters Along the Lower Colorado River. U.S. Bureau of Reclamation. Boulder City, Nevada 88 pp. (mimeo).
- , 1976. Final Report: An Ecological Analysis of Backwaters of the Lower Colorado With Special Emphasis on Deer Island Lake. U.S. Bureau of Reclamation. Boulder City, Nevada 147 pp. (mimeo)
- Blair, W. F., 1939. Some Observed Effects of Stream Valley Flooding on Mammalian Populations in Eastern Oklahoma. J. Mammal., 20-304-306.
- Blem, L.B. and C.R. Blem, 1975. The Effect of Flooding on Length of Residency in the White-footed Mouse, Peromyscus leucopus. Am. Midl. Nat. 94(1)-233-236.
- Bradley, G.W. and Deacon, J.E., 1967. The Biotic Communities of Southern Nevada. Nevada State Museum Anthropological Papers No. 13, Carson City, Nevada.
- Broadway, J.E. and P. L. Herrgesell, 1978. A Limnological Survey of the Lower Colorado River. Final Report. U.S. Bureau of Reclamation. Boulder City, Nevada 50 pp. (mimeo).
- Brooks, Richard H., Lawrence Alexander, and Robert Crabtree, 1970. The 1969/70 Report on the Archaeological Survey of the Lower Colorado River. Nevada Archaeological Survey, Desert Research Institute, University of Nevada Las Vegas.

Bryant, G.L., 1977. Colorado River Fish Inventory: Hoover Dam to Willow Beach. U.S. Bureau of Reclamation. Boulder City, Nevada 46 pp (mimeo).

Desert Research Institute, 1976. Water Resources Research in the Lower Colorado River Basin 1972-1976. Desert Research Institute, University of Nevada Las Vegas.

Douglas, C.L., 1977. Biota of Lake Mead National Recreation Area. Cooperative National Park Resources Studies Unit. University of Nevada Las Vegas. Department of Biological Sciences, Las Vegas, Nevada.

Green, C.R. and W.D. Sellers (Eds.), 1964. Arizona Climate, University of Arizona Press, Tucson, Arizona.

Grizzell, R.A., 1976. Flood Effects on Stream Ecosystems. Journal of Soil and Water Conservation. 31:283-286.

Marshall, C.W., 1976. Inventory of Fish Species and the Aquatic Environment of Fifteen Backwaters of the Topock Gorge Division of the Colorado River. 98 pp (mimeo).

McCarley, W.H., 196-59. The Effect of Flooding on a Marked Population of Peromuscus. J. Mammal, 19:230-234.

Minckley, W.L., 1976. Aquatic Habitats and Fishes of the Lower Colorado River. Final Report. U.S. Bureau of Reclamation, Boulder City, Nevada.

, 1973. Fishes of Arizona, Arizona Game and Fish Department, Phoenix, Arizona.

Ohmart, R.D. and R.W. Smith, 1973. North American Clapper Rail (Rallus longirostris), Literature Survey with Special Consideration Being Given to the Past and Current Status of yumanensis.

U.S. Bureau of Reclamation, Boulder City, Nevada. 45 pp.

Ponder, G., 1975. Inventory of Fish Species and Aquatic Environment of Sixteen Backwaters of the Imperial Division of the Colorado River. California Department of Fish and Game, Inland Fish. Adm. Rpt. No. 75-3. 87 pp (mimeo).

Priscu, J.C., Jr., 1978. Primary Productivity and Related Limnological Factors in Lake Mohave (Colorado River). Masters Thesis. University of Nevada Las Vegas. Las Vegas, Nevada. 154 pp.

Rogers, Malcolm, 1939. Early Lithic Industries of the Lower Basin of the Colorado River and Adjacent Desert Areas. San Diego Museum Papers, No. 3. San Diego. 1945.

, 1945. An Outline of Human Prehistory. Southwestern Journal of Anthropology, Vol. 1, No. 2, University of New Mexico, Albuquerque.

Schroeder, Albert H., 1951. A Brief Review of an Archaeological Survey of the Lower Colorado River from Davis Dam to the International Border. National Park Service, Boulder City, Nevada.

Stickel, L.F., 1948. Observations on the Effect of Flood on Animals. Ecology, 29:505-507.

Teskey, R.O. and T.M. Hinckley, 1977. Impact of Water Level Changes on Woody Riparian and Wetland Communities. National Stream Alternation Team. U.S. Fish and Wildlife Service, Vol. 1-3, Columbia, Missouri.

U.S. Department of Agriculture - Soil Conservation Service, 1970. Bibliography, Virgin River Basin Area, Nevada-Utah-Arizona. U.S.D.A. - SCS, Reno, Nevada.

U.S. Department of Interior, 1975. Quality of Water - Colorado River Basin. Progress Report No. 7, 195 pp.

, 1977, Quality of Water - Colorado River Basin Progress Report No. 8, 195 pp.

Vitt, L.J. and R.D. Ohmart, 1978. Herpetofauna of the Lower Colorado River: Davis Dam to the Mexican Border. Proceedings of the Western Foundation of Vertebrate Zoology, Vol. 2, No. 2. Los Angeles, California 72 pp.

Warren, D.K. and R.M. Turner, 1975. Salt cedar (<u>Tamarix chinensis</u>) Seed Production, Seedling Establishment, and Response to Inundation. Journal of the Arizona Academy of Science. Vol. 10, No. 3, 135-144 pp.

Yates, R. and M. Marshall, 1974. The Lower Colorado River: A Bibliography. Arizona Western College Press. Yuma, Arizona.

Yuma Clapper Rail Recovery Team, 1977. Draft Yuma Clapper Rail Recovery Plan: February, 1977. U.S. Fish and Wildlife Service. Albuquerque, New Mexico. 27 pp (mimeo).

Appendix F RECOMMENDED FIELD WORKING AGREEMENT

Appendix F

RECOMMENDED FIELD WORKING AGREEMENT BETWEEN

DEPARTMENT OF THE INTERIOR, BUREAU OF RECLAMATION,

AND DEPARTMENT OF THE ARMY, CORPS OF ENGINEERS

Appendix F

RECOMMENDED FIELD WORKING AGREEMENT

Subsequent to the approval of this report by the South Pacific Division of the Corps of Engineers, a formal field working agreement between the Corps of Engineers and the Bureau of Reclamation will be consummated. The text of that agreement, which implements alternative 1 of this study, is presented in the remainder of this appendix.

FIELD WORKING AGREEMENT

BETWEEN

DEPARTMENT OF THE INTERIOR, BUREAU OF RECLAMATION

AND

DEPARTMENT OF THE ARMY, CORPS OF ENGINEERS

FOR

FLOOD CONTROL OPERATION

OF

HOOVER DAM AND LAKE MEAD, COLORADO RIVER, NEVADA - ARIZONA

	This	field	worki	ng ag	greem	ent,	made	and	enter	ed into	this _	day
of _						19	82,	betwe	en the	Lower	Colora	do Region,
Burea	u of	Reclam	ation	and	the S	South	Paci	ific I)ivisio	on, Cor	ps of E	ngineers,

WITNESSETH THAT:

WHEREAS, Hoover Dam and Lake Mead, Colorado River, Clark County, Nevada and Mohave County, Arizona, was authorized as part of the Boulder Canyon Project Act (Public Law 70-642). The Boulder Canyon Project Act states that Boulder Dam (Public Law 43 changed the name of the structure from Boulder Dam to Hoover Dam) and the reservoir that it creates shall be used: first, for river regulation, improvement of navigation, and flood control; second, for irrigation and domestic uses; and third, for power.

WHEREAS, the Department of the Interior, acting through the Bureau of Reclamation, represented by the appropriate Regional Director, hereinafter referred to as the Regional Director, has constructed Hoover Dam and

Reservoir, and is responsible for the safety of the structure and for normal operations of the Lower Colorado River, of which said dam and reservoir are a part.

WHEREAS, the Department of the Army, acting through the Corps of Engineers, represented by its appropriate District and Division Engineers, is responsible for the flood control operation of Hoover Dam and Lake Mead in accordance with Section 7 of the 1944 Flood Control Act (Section 7, Public Law 78-534, 58 Stat. 890, 33 U.S.C. 709), which directs the Army to prescribe regulations for the use of storage allocated for flood control or navigation at all reservoirs constructed wholly or in part with Federal funds, and as promulgated in the Code of Federal Regulations, Title 33, Part 208.11, 13 October 1978.

WHEREAS, there is a need for a working agreement to insure a clear understanding of flood control regulations and information exchange required for the operation of Hoover Dam and Lake Mead.

NOW, THEREFORE, it is mutually understood and agreed by and between the parties hereto that this field working agreement shall consummate the provisions of the 1944 Flood Control Act for Hoover Dam and Lake Mead. In addition to the responsibilities of the project owner and the Corps of Engineers spelled out in paragraph 208.11, 33 CFR, it is agreed that Hoover Dam and Lake Mead will be operated in the interest of flood control in accordance with the following water control plan.

(a) In order to provide storage space for control of floods, releases from Lake Mead shall be scheduled so that available storage space for flood control will not be less than that indicated in the following table for the dates shown. Flood control storage space shall be the available storage space below elevation 1,229 feet.

Date	Available stora	flood ge spac	
		re-feet	
1 August	1	,500,00	00
1 September	2	,270,00	00
1 October	3	,040,00	00
1 November	3	,810,00	00
1 December	4	,580,00	00
1 January	5	, 350,00	00

Pertinent information on permissible changes in available flood control storage space in Lake Mead is given in subparagraphs (1), (2), and (3) of this paragraph.

(1) The available flood control storage space in Lake Mead during the period 1 August to 1 January may be reduced to a minimum of 1,500,000 acre-feet, provided the additional space prescribed under paragraph (a) above is available in active storage space in upstream reservoirs. The maximum storage space in upstream reservoirs that can be credited to the 1 September, 1 October, 1 November, 1 December, or 1 January storage space requirement in Lake Mead is given in the following table:

Reservoir

Creditable storage space (Acre-feet)

Blue Mesa..... 748,500

Flaming Gorge plus Fontenelle..... 1,507,200

- (2) Space building releases from Lake Mead during the period 1 August to 1 January shall not exceed 28,000 cubic feet per second. Space building releases are herein defined as releases for the purpose of attaining the available flood control storage space given in paragraph (a) above.
- (3) If, however, available flood control storage space diminishes at any time to less than 1,500,000 acre-feet then the minimum flood control releases are described in paragraph (b) below.
- (b) At any time during the year, if available storage space in Lake Mead should become less than 1,500,000 acre-feet, then minimum releases from Lake Mead for flood control shall be determined daily from table 1 (Minimum Flood Control releases from Hoover Dam throughout the year) using available flood control storage space in Lake Mead. Pertinent information on permissible changes in the releases as indicated in table 1 is given in subparagraphs (1), (2), and (3) of this paragraph.

- (1) During 1 August to 1 January minimum releases from Lake Mead as given in table 1, if 40,000 cubic feet per second or less, shall not be reduced when once initiated until the storage space prescribed in paragraph (a) above becomes available. During the remainder of the year, releases as given in table 1 if 40,000 cubic feet per second or less are maintained until 1,500,000 acre-feet of storage is available at Lake Mead.
- (2) Minimum releases from Lake Mead as given in table 1, if greater than 40,000 cubic feet per second, shall not be reduced, when once initiated, until Lake Mead water surface has receded to elevation 1,221.4 (top of spillway gates raised position). During 1 August to 1 January, releases may then be gradually reduced to 40,000 cubic feet per second and shall be maintained at not less than that rate until the storage space prescribed in paragraph (a) above becomes available. During the remainder of the year releases may also be reduced to 40,000 cubic feet per second upon reaching elevation 1,221.4 in Lake Mead, and shall be maintained at not less than that rate until 1,500,000 acre-feet of storage space is available at Lake Mead.
- (3) The releases required in table 1 are minimum releases. Based on forecasted inflow, releases when the Lake Mead water surface elevation is between 1219.61 feet and 1229.00 may be higher during the early stages of a flood so as to achieve a greater reduction in ultimate peak outflow.
- (c) Releases from Lake Mead shall be restricted to quantities that will not cause a flow in excess of 40,000 cubic feet per second at the gaging station, Colorado River below Davis Dam, insofar as possible.

However, with the reservoir water surface at the top of the flood control pool, a discharge of about 65,000 cubic feet per second will be passing over the Hoover Dam spillways with the gates in the raised position.

- (d) For the period 1 January through 31 July, minimum releases from Lake Mead to attain the 1 August flood control space prescribed in paragraph (a) above shall be determined by use of the Flood Control Algorithm described in Exhibit 1 and Water Loss Equations for Lakes Mead and Powell described in Exhibit 2. Pertinent information on inflow forecasts and on permissible changes in the prescribed releases is given in subparagraphs (1), (2), (3), (4), (5), and (6) of this paragraph.
- (1) All inflow forecasts used in carrying out the provisions of these regulations shall be prepared by the Colorado River Forecasting Service located in the National Weather Service River Forecast Center in Salt Lake City, Utah and shall be for the flow of the Colorado River into Lake Mead including the runoff contribution from the tributary drainage area between Lake Powell and Lake Mead.
- (2) Lake Mead inflow forecasts as provided by the Colorado River Forecast Service shall be determined from depleted flow. Depletion of natural (virgin) flow shall include transbasin diversions, net water use (diversion minus return flow), and evaporation from reservoirs upstream of Lake Powell. Adjustments to the forecast provided by the Colorado River Forecast Service shall be made for effective storage space in upstream reservoirs as specified in subparagraph (3) of this paragraph. The

maximum forecast for any specified runoff period is defined as the estimated inflow volume (acre-feet) that, on the average, will not be exceeded 19 times out of 20.

- (3) Effective storage space in Navajo, Blue Mesa, and Flaming Gorge plus Fontenelle reservoirs is the lesser of the actual space available, or the usable space available. The usable space is the difference between the mean forecasted inflow volume (acre-feet) for any specified runoff period and projected mean reservoir releases. In computing effective storage space for Flaming Gorge plus Fontenelle, the actual space is the sum of the actual available space in both reservoirs; while mean forecasted inflow volume and projected mean reservoir release will be the values at Flaming Gorge reservoir. Effective storage space in a reservoir(s) may be a negative value if projected mean reservoir releases exceed the mean forecasted inflow volume.
- (4) When minimum releases for the months of January through July as determined by the Flood Control Algorithm are less than 28,000 cubic feet per second, it will be permissible to release less than the indicated amounts for a part of a month, provided the average releases for the entire month will equal the release given by the Algorithm, without flows exceeding 28,000 cubic feet per second at the gaging station, Colorado River below Davis Dam.
- (5) The Flood Control Algorithm described in Exhibit 1 accounts for storage space in Lakes Powell and Mead. Whenever sufficient runoff occurs, Lake Powell is expected to fill to capacity (water surface

elevation 3700.0 feet) and Lake Mead is expected to fill to capacity (water surface elevation 1219.61), and remain full until 1 August so as to preclude any increase in the flood control releases specified by the Flood Control Algorithm above 28,000 cubic feet per second at the gaging station, Colorado River below Davis Dam.

- (6) The objective of the Flood Control Algorithm is to specify releases such that Lake Mead will be no higher than water surface elevation 1219.61 feet (1,500,000 acre-feet of available storage space below elevation 1229.0 feet) on 1 August. Subsequent revisions to the minimum releases specified by the Flood Control Algorithm may be made during July if justified by a forecast of the remaining runoff and comparison with empty reservoir space available.
- (e) During the period 1 January through 31 July the larger release specified by the Flood Control Algorithm versus table 1 shall be the required minimum release.
- (f) At anytime of the year, Hoover Dam releases shall not result in a flow rate greater than 28,000 cubic feet per second at the gaging station, Colorado River below Davis Dam unless required or authorized by these regulations.
- (g) Nothing in this agreement shall be construed to require dangerously rapid changes in magnitudes of releases. Releases will be made in a manner consistent with requirements for protecting the dam, reservoir and appurtenances from major damages.

- (h) Hoover Dam is but one of three major flood control reservoirs in the Lower Colorado River Basin. The Corps of Engineers operates Alamo Dam on the Bill Williams River and Painted Rock Dam on the Gila River. In that flows on these tributary streams contribute to the mainstem Colorado River, coordinated operation of all three reservoirs is essential to achieving flood control objectives. Hence temporary deviations from the Hoover Dam releases prescribed in this regulation may be necessary after consideration of the available storage, projected inflows, and required releases from these tributary reservoirs.
- (i) The Bureau of Reclamation shall procure such current basic hydrologic data, and make such current calculations of permissible releases from Lake Mead as are required to accomplish the flood control objectives prescribed above.
- (j) The Bureau of Reclamation shall keep the Los Angeles District Engineer, Corps of Engineers, Department of the Army, in charge of the locality, currently advised of reservoir releases, reservoir storage, and such other operating data as the District Engineer may request, and also of those basic operating criteria that effect the schedule of operation.
- (k) The flood control regulations are subject to temporary modification by the Los Angeles District Engineer, Corps of Engineers, if found necessary in time of emergency. Requests for and action on such modifications may be made by the fastest means of communications available. The action taken shall be confirmed in writing the same day to the office of the Regional Director and shall include justification for the action.

- (1) The Regional Director may temporarily deviate from the flood control regulations in the event an immediate short-term departure is deemed necessary for emergency reasons to protect the safety of Hoover Dam and Lake Mead, or downstream dams, or the levee systems along the lower Colorado River. Such actions will be immediately reported by the fastest means of communication available. Actions shall be confirmed in writing the same day to the Los Angeles District Engineer, Corps of Engineers, and shall include justification for the action.
- (m) The Bureau of Reclamation shall be responsible for providing adequate warnings to downstream interests when changes in release of stored floodwaters are made.
- (n) Revisions to the flood control operation for Hoover Dam and Lake Mead may be developed as necessary by the parties of this agreement. Each such revision shall be effective on the date specified.

IN WITNESS WHEREOF, the parties hereto have caused this memorandum of agreement to be executed as of the day and date first above written.

Corps of Eng	ineers
--------------	--------

Bureau of Reclamation

BY:		
•	Brigadier General, USA	_
	Division Engineer	
	South Pacific Division	

BY:

Regional Director

Lower Colorado Region

Table 1. Minimum flood control releases from Hoover Dam throughout the year.

CRITERIA

RELEASES

Water surface elevation between 1219.61 and 1221.40 feet (available storage between 1,500,000 and 1,218,000 acre-feet)

Make releases equal to inflow up to 28,000 cubic feet per second

Water surface elevation between 1221.40 and 1226.90 feet (available storage between 1,218,000 and 340,000 acre-feet)

Make outflow equal to inflow up to 40,000 cubic feet per second

Water surface elevation between 1226.90 feet to 1229.00 (available storage between 340,000 and 0 acrefeet

Make outflow equal to inflow up to 65,000 cubic feet per second

At water surface elevation 1229.00 (top of the flood control pool)

Maintain outflow equal to inflow

NO	т	r	•

Water surface elevation (feet)	Water in storage (millions of acre-fcet)	Available storage (millions of acre-feet)	Level
1205.40	23.708	3.669	Permanent spillway crest
1219.61	25.877	1.500	Minimum required flood control pool
1221.40	26.159	1.218	Top of spillway gates in raised position
1226.9	27.037	0.340	Spillway discharge equals 40,000 cubic feet per second with spillway gates in raised position
1229.00	27.377	0	Top of flood control pool
1232.00		0	Top of dam

EXHIBIT 1

FLOOD CONTROL ALGORITHM

The flood control algorithm is applicable during the period of 1 January through 31 July.

Definitions.

- FI = the forecasted depleted inflow volume (in million acre-feet) to

 Lake Mead during the current month through 31 July, which will not
 be exceeded 19 times out of 20, and has been adjusted for
 effective storage space in selected upstream reservoirs excluding

 Lake Powell. FI is referred to as the maximum forecast.
- SSM = current storage space (in million acre-feet) in Lake Mead below elevation 1229.0 feet.
- SSP = current storage space (in million acre-feet) in Lake Powell below elevation 3700.0 feet.
- RRMN = the Hoover Dam hypothetical average release rate (in cubic feet per second at a specific step rate corresponding to the subscript N) through 31 July excluding the current month. Step values are as follows:

Release Step	Release Rate
	(cubic feet per second)
rrm _o	0
RRM ₁	19,000
RRM ₂	28,000
rrm ₃	35,000
RRM_{4}	40,000
rrm ₅	73,000
the Hoover Dam average resecond) during the cursolution of the volumetric	
•	elease rate (in cubic feet pood control during the curre
the number of days in the	current month.
the number of remaining	days from the present throu
31 July excluding the curr	rent month.
the Lake Mead water loss	(in million acre-feet) to be
storage during the current	t month through 31 July.

RCM =

FCR =

NCM =

NRM =

BSM =

EVM = the Lake Mead water loss (in million acre-feet) due to evaporation at the lake surface during the current month through 31 July.

BSP = the Lake Powell net water loss (in million acre-feet)

due bank storage during the current month through

31 July.

EVP = the Lake Powell net water loss (in million acre-feet)

due to evaporation and precipitation during the current

month through 31 July.

Detailed procedure and equations used to define the terms BSM, EVM, BSP and EVP are presented in Exhibit 2.

The volumetric equation applied to determine RCM is as follows:

FI = SSM + SSP - 1.5 + 1.9835 x
$$10^{-6}$$
 ((RCM x NCM) + (RRM_N x NRM)) + BSM + EVM + BSP + EVP

Solution of equality of the volumetric equation is iterative using progressively increasing step values of RRM_0 through RRM_5 . RRM_N must be the smallest step value satisfying the requirement that RCM must be equal to or less than RRM_N .

The required Hoover Dam flood control release FCR during the current month is determined according to either condition a or b as follows:

- (a) if RCM is greater than or equal to RRM_{N-1} then, FCR = RCM
- (b) if RCM is less than RRM_{N-1} then, $FCR = RRM_{N-1}$

EXHIBIT 2

WATER LOSS EQUATIONS FOR

LAKES MEAD AND POWELL

July 1982

LAKE MEAD

BSM = 0.065 (SSM - 1.5)

 $EVM = (NEM) (AAM \times 10^{-6})$

where:

BSM = the Lake Mead water loss (in million acre-feet) to bank storage during the current month through 31 July.

SSM = current storage space (in million acre-feet) in Lake Mead below elevation 1229.0 feet.

EVM = the Lake Mead water loss (in million acre-feet) due to evaporation at the lake surface during the current month through 31 July.

AAM = the average reservoir surface area (in acres) on Lake Mead from the current month through 31 July.

NEM = the average evaporation depth (in feet) for Lake Mead from the current month through 31 July as follows:

Month	Evaporation Rate (feet)
January	0.36
February	0.33
March	0.37
April	0.46
May	0.53
June	0.64
July	0.80

LAKE POWELL

BSP = 0.15 (SSP)

BSP = the Lake Powell water loss (in million acre-feet) to bank storage during the current month through 31 July.

SSP = current storage space (in million acre-feet) in Lake Powell below elevation 3700.0 feet.

EVP =
$$(c_1 E^{14} + c_2 E^3 + c_3 E^2 + c_4 E + c_5)$$
 (SM)

where:

EVP = the Lake Powell net water loss (in million acre-feet) due to evaporation and precipitation during the current month through 31 July.

E = the average water surface elevation of Lake Powell (in feet above mean sea level) from the current month through 31 July.

SM = a coefficient for the current month through 31 July as follows:

Period		Coefficient
January -	July	0.536
February -	July	0.486
March -	July	0.439
April -	July	0.380
May -	July	0.313
June -	July	0.222
July		0.118

Constants are as follows:

 $C_1 = -1.06524 \times 10^{-12}$

 $C_2 = 1.68872 \times 10^{-8}$

 $c_3 = -9.51439 \times 10^{-5}$

 $C_{ij} = 0.229605$

 $c_5 = -2.0211176 \times 10^2$

The equations in Exhibit 2 may be revised based on prudent engineering analysis without requiring formal revision of the total field working agreement. Revision would be effective following written agreement between the Regional Director and the Division Engineer. All revised versions of Exhibit 2 shall be labeled indicating the date of revision before being effective.

SIMPLIFIED APPLICATION OF THE FLOOD CONTROL REGULATION TO DETERMINE APPROXIMATE RELEASES

The following set of tables 1 through 7 provide approximate values of required January through July flood control releases from Hoover Dam for use as a convenient reference or guide. The simplifying assumption made in deriving these tables is that Lake Powell is full to elevation 3700 feet, and all available storage space for both Lakes Mead and Powell occurs at Lake Mead. Hence all bank storage changes and evaporation loss determinations for both Lake Powell and Lake Mead are assumed to be equivalent to the water losses and/or gains that would occur at Lake Mead only.

The true value of the required flood control release from Hoover Dam must be determined from use of the Flood Control Algorithm in exhibit 1 of the Field Working Agreement.

TABLE 1 - MINIMUM AVERAGE JANUARY RELEASE FROM HOOVER DAM

SPACE IN LAKE MEAD BELOW ELEVATION	ION			MAXIA	, F	MAXIMUM JANUARY-JULY FORECAST	- JUL-	FOR	CAST		IN MILLION ACRE-FEET 1/	ACR.	E-FEE	1 1/			
LAN I	ON JAN 1 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 4 4 4 8 8 10 12 14 16 18 20 22 24 26 28 30 32 34 4 4 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	4 11	6 H	00 11	10	# 55 # # # # # # # # # # # # # # # # # #	14	16	18	20	22	24	26	28	30	32	W II
			RELEA	SE IN	THOUS	RELEASE IN THOUSANDS OF CUBIC FEET		BIC F	CUBIC FEET PER SECOND	PER SECOND	COND	2					
	0	0	0	0	19	19	28	33	37	0	0	0	9	9	0	72	73
	•	۰	0	0	12	3.9	24	28	32	9	0	Q T	•	0	0	40	73
	٥	٥	0	0	۰	19	19	28	31	33	9	Ç	0	0	0	9	70
	٥	٥	۰	0	0	10	19	25	28	200	04	9	0	9	9	9	52
	۰	0	0	0	0	0	19	19	28	59	33	9	6	40	40	0	9
	•	0	•	0	0	0	80	19	21	28	35	40	\$	0	40	0	9
	0	0	0	٥	0	0	0	19	19	28	28	33	0	9	4 0	0	Ç
	0	0	0	٥	٥	0	0	•	19	19	28	33	0	9	0	04	9
	0	0	٥	0	0	0	0	0	19	19	28	28	SC PC	9	9	0	6
	0	٥	0	0	0	۰	0	٥	er)	19	19	28	33	9	0	0	9
	•	0	0	0	0	•	0	0	•	19	19	28	2 8	32	9	04	9
	0	٥	0	0	0	0	0	0	•	m	19	19	28	32	9	0	9
	0	•	0	0	٥	0	٥	٥	0	0	18	19	58	28	32	0	9
	٥	٥	0	0	٥	0	٥	0	0	0	-	19	19	28	32	0	9
	٥	0	•	0	0	0	0	•	0	0	0	16	19	28	28	r,	4
	٥	0	0	0	0	0	0	•	0	0	0	•	19	19	28	32	9

- COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE IN UPSTREAM RESERVOIRS. 1
- VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT I OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS FREATED AS IF IT WERE ALL. SPACE IN LAKE MEAD. 6

TABLE 2 - MINIMUM AVERAGE FEBRUARY RELEASE FROM HOOVER DAM

SPACE IN LAKE MEAD BELOW ELEVATION	ž			MAXIM	EH FE	MAXIMUM FERRUARY-JULY FORECAST IN MILLION ACRE-FEET	Y-JUL	F0	RECAS	₹ 11	1111	¥.	K-FEE	71 13			
	11 12 H	4 ii	9 =====	8 !!	10	12	14	16	18	20	22	2.4	26	28	30	32 3	4 8
MILLION AGRE-FEET			RELEASE		IN THOUSANDS	ANDS	OF CL	CUBIC	FEET	PER SECON	SECONE	2					
8	0	۰	٥	17	19	28	32	0	04	0	Ŷ	9	9	73	73	73 7	23
м	0	•	٥	0	19	20	28	35	9	40	6	9	6	63	73	73 7	73
•	0	0	0	0	15	19	28	100	9	0	40	0	0	4	73	73 7	73
ທ	•	0	0	0	0	19	19	28	32	0	9	9	0	0	61	73 7	73
. 9	•	0	•	•	•	12	19	28	33	9	0	0	40	9	42	73 7	73
7	٥	0	•	•	•	٥	19	19	28	35	0	0	0	0	0	58 7	73
ω	0	0	0	0	0	•	10	19	28	31	04	0	9	0	0	04	73
٥	•	•	•	۰	•	0	0	19	19	28	35	04	0	40	04	0	26
10	•	0	•	•	0	0	0	6	19	28	29	38	0	9	0	0	9
11	0	0	•	•	0	0	0	•	19	19	28	32	9	9	•	•	9
12	٥	0	0	0	۰	•	•	•	•	19	28	28	36	9	0	•	9
13	•	0	0	0	0	•	0	•	0	19	19	58	32	40	0	•	9
14	0	0	•	0	0	0	•	•	٥	•	19	27	28	32	•	•	9
15	۰	0	•	۰	0	•	•	•	۰	٥	19	19	58	32	0	0	9
16	۰	•	0	0	0	0	•	0	•	٥	N	19	52	28	33	0	9
17	۰	0	•	0	0	•	0	0	•	•	۰	19	19	28	93	9	9

F-23

COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE IN UPSTREAM RESERVOIRS. 7

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 'n

The second secon

TABLE 3 - MINIMUM AVERAGE MARCH RELEASE FROM HOOVER DAM

	45 8		73	73	73	73	73	73	73	73	73	73	73	26	9	9	Ŷ	Q
	32		73	73	73	73	73	73	73	73	73	28	4	9	Q	9	9	9
	30		73	73	73	73	73	73	73	9	4	9	9	9	9	9	0	9
7			73	73	73	73	73	62	Ą.	9	9	0	0	0	0	0	37	33
	26		23	73	73	4	47	9	0	9	0	0	Q	9	36	93	28	28
ACRE-I	24	2	73	99	46	9	9	9	9	9	0	9	ç	35	28	28	19	13
NOI	22	SECOND	51	0	9	9	9	9	9	9	9	32	28	58	21	19	19	r o
MAXINUM MARCH-JULY FORECAST IN MILLION ACRE-FEET	70	PER SECOND	Q	0	0	0	9	0	9	35	30	28	23	19	19	^	•	•
IST IN	18	FEET F	Q Q	0	0	0	9	32	32	28	25	19	19	0-	0	٥	0	۰
ORECA	16	RELEASE IN THOUSANDS OF CUBIC FEET	Q Q	0	0	33	34	28	27	19	19	11	0	0	0	٥	0	•
JULY F	1.4	פר כו	9	32	32	28	28	19	19	13	0	0	0	0	•	0	•	•
RCH-L	12	THOUSANDS	33	28	28	19	19	14	•	•	٥	٥	0	0	•	•	٥	•
¥ ×	10	THOUS	28	13	19	16	0	0	0	0	0	0	0	٥	0	0	0	0
MAXIM	8	E IN	19	18		0	٥	0	٥	٥	0	0	0	٥	0	0	0	•
		RELEASE IN	m	•	0	0	0	•	•	0	0	0	•	0	•	0	0	•
	4	œ ·	•	•	0	•	•	0	0	•	0	0	٥	0	0	0	•	•
z	2		•	•	•	0	0	•	0	0	•	0	0	٥	0	0		•
SPACE IN LAKE MEAD BELOW ELEVATION		MILLION ACRE-FEET	2	м	•	'n	•		ω	0-	10	11	12	Et	14	15	16	17

COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE IN UPSTREAM RESERVOIRS. 1

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 5

TABLE 4 - MINIMUM AVERAGE APRIL RELEASE FROM HODVER DAM

	34		73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	7
	32		73	73	73	73	73	73	73	73	73	73	73	73	73	63	4 10	9
	30		73	73	73	73	23	23	73	73	73	23	73	65	47	9	ç	9
1	28		73	73	73	73	73	73	73	73	73	67	40	0	9	0	9	9
	11 11		73	73	73	73	73	73	73	69	51	9	9	04	9	0	9	13
CRE-F	24	2	73	73	73	73	73	71	53	9	9	40	9	9	0	33	28	58
NOI.	22	SECOND	73	73	73	73	33	9	40	0	0	0	0	32	29	28	19	19
MAXIMUM APRIL-JULY FORECAST IN MILLION ACRE-FEET	2 4 6 8 10 12 14 16 18 20 22 24 26	•	73	73	22	0	0	0	0	0	0	(C)	31	28	19	19	۰	•
NI TS	18	⊢ •	29	41	40	0	0	0	0	36	33	58	19	19	11	•	•	•
)RECA!	16	RELEASE IN THOUSANDS OF CUBIC FEET	0	•	· •	40	` Q	38	93	28	21	19	13	•	•	•	•	0
ן. רץ 1ּרנ	4		04	04	04	04	32	28	23	19	15			•	۰	۰	0	•
rJU		tos o										_	_	_	_	_	_	_
APR]	12	JUSAN	4	4	32	28	25	19	17	٥	•	•	•	٥	•	•	•	•
HUMI	10	¥ :	33	28	27	19	19	-	•	0	•	0	•	•	0	0	0	•
AAX	8	SE	28	19	19	m	0	0	•	0	•	•	•	0	٥	0	•	•
	4 m	RELEASE IN THOUSANDS OF	19	ın	0	٥	0	0	0	0	0	0	0	0	0	•	•	٥
	4		•	0	٥	0	0	0	0	۰	0	٥	•	٥	0	•	•	•
z	2		•	0	٥	٥	0	0	•	٥	•	•	٥	٥	0	•	•	•
SPACE IN LAKE MEAD BELOW ELEVATION	ELEVATION 3,700 DN	MILLION ACRE-FEET	2	M	•	ю	•	,	œ	٥	10	11	12	P) 41	1.0	15	16	17

COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE In upstream reservoirs. 1

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 6

TABLE S - MINIMUM AVERAGE MAY RELEASE FROM HOOVER DAM

SPACE IN LAKE MEAD BELOW ELEVATION	*			MAXI	¥	MAXINUM MAY-JULY FORECAST IN MILLION ACRE-FEET	.Y F0	RECASI	N	וגררזנ	N AC	Œ-FE	11 17				
ELEVATION 3,700 ON	2	٠!	9		2	12	14 16	16	18	20	22	2	58	88	8	32	×
MILLION ACRE-FEET			RELEA	RELEASE IN	THOUS	RELEASE IN THOUSANDS OF CUBIC FEET PER SECOND	0F C	UBIC	FEET F	PER SI	SECOND	6					
2	0	11	58	23	9	0	89	73	73	23	73	22	23	23	73	73	5
м	•	•	19	58	0	ç	90	73	73	73	73	73	73	73	23	23	2
•	•	•	•	24	32	0	Q	99	73	73	73	73	73	73	73	23	23
'n	٥	٥	٥	19	28	0	9	4 8	73	73	73	73	73	23	73	73	73
•0	•	•	0	7	22	32	9	9	49	73	73	73	73	23	23	73	2
•	•	•	•	0	19	28	9	•	46	73	73	73	73	23	73	73	73
œ	٥	٥	٥	٥	เก	20	33	9	9	62	73	73	73	73	73	73	73
0-	0	•	•	٥	0	19	28	9	9	‡	73	73	23	23	73	73	2
10	•	•	۰	•	0	ю	19	33	Q	9	9	73	73	73	73	73	2
11	0	٥	٥	0	٥	٥	19	28	9	9	M.	73	73	23	73	73	23
12	•	٥	0	•	0	0	-	19	33	9	9	28	73	73	73	73	2
13	•	۰	۰	•	•	•	•	17	28	9	9	7	73	73	73	73	73
1.4	۰	٥	٥	٥	٥	0	•	0	19	33	9	0	36	73	73	73	73
25	0	٥	0	٥	0	0	•	•	15	28	38	9	9	77	73	73	23
16	•	0	•	•	•	•	•	•	•	19	31	9	Q	40	73	73	73
17	0	. 0	٥.	•	•	•	•	•	0	13	58	36	9	9	69	73	73

COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE In upstream reservoirs. 7

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 'n

MARCH 1982

TABLE 6 - MINIMUM AVERAGE JUNE RELEASE FROM HOOVER DAM

IN LAKE HEAD	NOI			MAXIM	5 5	MAXIMUM JUNE-JULY FORECAST IN MILLION ACRE-FEET	ורא דו)RECA	NI TE	MILL	TON A	RE-FI	EET 1/				
DELOW ELEVATION 3,700 DN JUN 1	2	+	8 6 8		10 12		71	16	81	8	22	24	28	8	8	32	Ä
MILLION ACRE-FEET			RELEASE	Ĭ:	THOUS	THOUSANDS OF CUBIC	P. C.	CUBIC F	FEET (PERS	SECOND	2					
N	•	5	ç	‡	73	73	73	73	73	73	23	73	23	73	73	73	7.3
m	•	10	32	9	9	73	73	73	73	23	73	73	73	73	73	73	73
•	۰	٥	22	Q	42	73	73	73	73	73	73	73	73	73	73	73	73
n	۰	٥	13	9	9	8	73	73	73	73	73	73	73	73	73	73	73
•0	•	0	0	19	9	Q Q	73	73	73	73	73	73	73	73	12	7.3	73
	٥	•	0	11	28	9	36	73	73	73	73	23	73	73	73	73	73
00	•	0	•	0	19	39	9	72	73	73	73	73	73	73	23	73	73
6-	•	•	•	0	۰	28	9	4	73	73	73	73	73	73	73	73	73
10	•	•	•	•	0	19	37	9	8	73	73	73	23	73	73	73	73
11	•	•	•	0	0	_	28	9	22	73	73	73	73	73	73	73	73
12	•	۰	•	0	•	0	19	33	9	89	73	73	73	۲ ا	73	73	73
13	0	•	•	•	0	0	សា	28	9	20	73	73	73	73	73	73	73
14	•	۰	۰	•	•	۰	•	19	33	9	99	73	73	73	73	73	73
101	•	•	0	٥.	0	0	0	ю	27	9	4 8	73	73	73	73	73	73
16	0	•	•	0	•	0	0	0	18	33	9	£9	73	23	73	73	73
17	۰	•	•	•	•	•	•	•	-	23	9	9	73	73	73	73	73

COLORADO RIVER FORECAST SERVICE VALUE FOR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORAGE SPACE In upstream reservoirs. ;

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE HEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 'n

TABLE 7 - MINIMUM AVERAGE JULY RELEASE FROM HODVER DAM

	34		73	73	73	73	73	73	73	73	73	73	73	73	23	73	73	2
	32		23	73	73	73	73	73	73	73	73	73	23	73	73	73	73	22
	30		73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	2
1	28		73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	23
	26		73	73	73	73	73	73	73	73	73	73	23	73	73	73	73	23
ACRE-F	24	2	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	23
NOI	22	SECOND	73	2	73	73	73	73	73	73	73	73	73	73	73	23	73	73
MAXIMUM JULY-JULY FORECAST IN MILLION ACRE-FEET	4 6 8 10 12 14 16 18 20 22 24	PER	73	73	73	73	73	73	73	73	23	73	73	73	73	73	72	ņ
ST IP	18	FEET	73	73	73	73	73	73	73	73	73	73	73	73	23	52	62	22
OREC	16	OF CUBIC	73	73	73	73	23	73	73	73	73	2	73	50	7	24	^	•
JULY 1	4	9 9	73	73	73	73	73	73	73	73	73	61	43	56	0-	0	•	•
JULY	12	THOUSANDS	73	73	73	73	73	73	73	63	4	28	11	•	۰	•	•	•
, MOM	10		73	73	73	73	73	92	42	30	13	•	•	•	•	•	•	•
Æ [X	8	RELEASE IN	73	73	73	29	20	32	13	0	0	0	•	٥	0	•	•	•
	9	RELEASE	73	. 69	32	¥ ¥	17	•	0	0	•	•	•	0	•	•	0	•
	7		ņ	36	19	и	٥	۰	٥	٥	٥	0	•	٥	٥	0	٥	•
Š	CA E		21	4	•	0	0	•	0	0	۰	٥	۰	•	•	•	٥	•
SPACE IN LAKE MEAD BELOW ELEVATION		MILLION ACRE-FEET	7	м	•	ın	•	2	œ	٥	10	11	12	13	14	15	16	17

COLORADO RIVER FORECAST SERVICE VALUE FIR INFLOW TO LAKE MEAD LESS ADJUSTMENT FOR EFFECTIVE STORADE SPACE IN UPSTREAM RESERVOIRS. 7

VALUES OF MINIMUM AVERAGE RELEASE ON THESE TABLES WERE CALCULATED ACCORDING TO THE DESCRIPTION GIVEN IN EXHIBIT 1 OF THIS APPENDIX, WITH ONE EXCEPTION: SPACE IN LAKE MEAD AND LAKE POWELL IS TOTALED AND THAT SUM IS TREATED AS IF IT WERE ALL SPACE IN LAKE MEAD. 'n

Appendix G AGENCIES VIEWS AND RESPONSES

Appendix G

AGENCIES VIEWS AND RESPONSES

This appendix contains all written review comments received during review of the February 1981 draft of this report. The letter requesting comments along with the mailing list is followed by the Corps' responses to each letter of comment when the letter contained questions or raised issues about the study or recommended flood control operating plan.



DEPARTMENT OF THE ARMY LOS ANGELES DISTRICT, CORPS OF ENGINEERS P. O. BOX 2711 LOS ANGELES, CALIFORNIA 90053

10 March 1981

Dear Sir:

The Los Angeles District Corps of Engineers and Lower Colorado Regional Office of Water and Power Resource Service have undertaken a joint study to determine the best flood control operation plan for Hoover Dam. Inclosed is a draft report documenting the evaluation of nine alternative flood control operation plans considered in the study as well as the tentative selection of one of those plans.

This letter seeks to formally request your comments with respect to the study and your views regarding the choice of the most appropriate flood control operating plan. Review of the inclosed report has been requested from the attached list of addressees.

Your comments should be directed to the Los Angeles District and be received by 1 June 1981.

Sincerely,

2 Incl As stated

Lieutenant Colonel, CE Acting District Engineer

HOOVER DAM MAILING LIST

Colorado River Agency Bureau of Indian Affairs Attn: Kimball Hansen Route 1, Box 9-C Parker, AZ 85344

Mr. Glen Willardson, Mgr. Garkana Power Association 56 East Center Richfield, UT 84701

Mr. Bud L. Bonnett, Director Provo City Power P.O. Box 658 Provo, UT 84601

Mr. Monte R. Taylor,
Power Superintendent
Strawberry Water Users' Assn.
745 North 500 East, Box 68
Payson, UT 84651

Director
Wyoming Game and Fish Dept.
State Office Building

Cheyenne, WY 82001

Mr. Stan Bazant, Manager Plains Electric G&T Coop., Inc. 2401 Aztec Road NE Albuquerque, NM 87107

Mr. Alan Merson, Regional Administrator, Region VII Environmental Protection Agency 1869 Lincoln St. Denver, CO 80203 Mr. Berry Hutchings 198 South 200 West Bountiful, UT 84010

Mr. Joseph C. Fackrell. Executive Director Intermountain Consumer Power Association P.O. Box BB Sandy, UT 84070

Mr. Kenneth Balcomb P.O. Drawer 790 Glenwood Springs, CO 81601

Director
New Mexico Division of
Game and Fish
State Capitol Bldg.
Santa Fe, NM 87503

Mr. Bill Lewis Director of Utility Dept. P.O. Box 900 Farmington, NM 87401

Director Colorado Division of Wildlife 6060 Broadway Denver, CO 80203

Mr. Robert A. Jantzen,
Director
Arizona Game and Fish Dept.
P.O. Box 9099
Phoenix, AZ 85068

Mr. Malcolm P. Dalton General Manager Navajo Tribal Utility Authority P.O. Box 170 Fort Defiance, AZ 86504

Mr. Merrill J. Millett, Mgr. Moon Lake Electric P.O. Box 278 Roosevelt, UT 84066

Mr. Sam Maynes 125 West 10th St. Durango, CO 81301

Mr. Wayne Johnson Albuquerque Operations Ofc. Dept. of Energy P.O. Box 5400 Albuquerque, NM 87115

Director Div. of Wildlife Resources 1596 West North Temple Salt Lake City, UT 84116

Mr. J. J. Bugas, President Colorado-Ute Electric Assn. P.O. Box 1149 Montrose, CO 81401

Mr. Evan L. Griffith, General Manager Metropolitan Water District of Southern California P.O. Box 54153, Terminal Annex Los Angeles, CA 90054

INCLOSURE 2

Mr. Ralph Esquerra
San Carlos Irrigation
Project
Bureau of Indian Affairs
P.O. Box 456
Coolidge, AZ 85228

Mr. R. L. Mitchell Manager of Power Contracts Southern California Edison Co P.O. Box 800 Rosemead, CA 91770

Mr. Louis H. Scott Lincoln County Power District No. 1 Box 187 Pioche, NV 89043

Mr. Howard Wertz, President Central Arizona Water Conservation District Suite 736 234 North Central Ave. Phoenix, AZ 85004

Mr. Virgil L. Jones,
Manager
Palo Verde Irrigation Dist.
P.O. Box 1199
Blythe, CA 92226

Mr. Tom Choules, Attorney at Law Westover, Choules, Shadle and Bowen P.O. Box 5030 Yuma, AZ 85364

Mr. James W. Cuming,
President
Yuma County Water Users'
Association
P.O. Box 708
Yuma, AZ 85364

Mr. Terry L. Zerkle City Manager P.O. Box 367 Boulder City, NV 89005 Mr. Karl A. Johnson, General Manager Water and Power Dept. City of Pasadena 100 N. Garfield Ave. Pasadena, CA 91109

Mr. George Heidenreich Lincoln County Power SR 89063 Box 101 Pioche, NV 89043

Mr. Lowell O. Weeks, General Mgr. and Chief Engineer Coachella Valley Water Dist. P.O. Box 1058 Coachella, CA 92236

Mr. William D. Baker Rawlins, Ellis, Burrus, and Kiewit 2300 Valley Bank Center Phoenix, AZ 85073

Mr. Clyde L. Gould, Manager and Secretary Wellton-Mohawk Irrigation and Drainage District Route 1, Box 19 Wellton, AZ 85356

Mr. Clyde Bowman, President Bard Water District 1473 Ross Rd. Winterhaven, CA 92283

Mr. L. S. Ormsby, Administrator Arizona Power Authority P.O. Box 6694 Phoenix, AZ 85005

Mr. Herbert Winsor, Utilities Manager Thatcher Municipal Utilities Town of Thatcher P.O. Box 670 Thatcher, AZ 85552 Mr. Lynn Simmons Overton Power Dist., No. 5 P.O. Box 3764 Overton, NV 89040

Mr. Jerry D. Wagers, Supt. Lake Mead National Recreation Area National Park Service 601 Nevada Highway Boulder City, NV 89005

Mr. Steve Binkley Arizona Public Service Station 1330 P.O. Box 21666 Phoenix, AZ 85036

Mr. Gary Crist,
Manager and Secretary
Yuma Mesa Irrigation and
Drainage District
14329 S. Fourth Ave.Extension
Yuma, AZ 85364

Mr. Donald L. Paff, General Manager Las Vegas Valley Water Dist. P.O. Box 4427 Las Vegas, NV 89106

President Yuma Irrigation District P.O. Box 5030 Yuma, AZ 85364

Mr. Grant Ward, General Mgr. Roosevelt Water Conservation District P.O. Box 168 Higley, AZ 85236

Mr. R. O. Synder, General Manager Public Service Dept. City of Burbank P.O. Box 631 Burbank, CA 91503 Mr. Dudley Welker, Attorney at Law Anderson, Welker & Flake P.O. Box 71 Safford, AZ 85546

Mr. Daniel F. Lawrence, Dir. Div. of Water Resources 300 Empire Bldg. 231 East 400 South Salt Lake City, UT 84111

Mr. W. O. Nelson, Jr., Regional Director Fish and Wildlife Service F.O. Box 1306 Albuquerque, NM 87103

Director Wyoming Recreation Commission State Office Bldg. Cheyenne, WY 82001

Mr. John Donaldson, Regional Supervisor, Region III Nevada Dept. of Wildlife 4747 West Vegas Dr. Las Vegas, NV 89108

Mr. Steve E. Reynolds State Engineer Bataan Memorial Bldg. Santa Fe, NM 87501

Mr. Raymond D. Schnepf, President Electric District No. 6 of Pinal County 2300 Valley Bank Center 701 North Central Ave. Phoenix, AZ 85073

Mr. Michael A. Curtis, Electrical fistrict No. 2 3003 North Central Ave., Suite 1402 Phoenix, AZ 85012 Mr. Duane R. Sudweeks, Administrator Division of Colorado River Resources P.O. Box 19090 Las Vegas, NV 89119

Mr. H. P. Dugan 3541 Montclair Rd. Shingle Springs, CA 95682

Mr. George O'Malley, Director Colorado Div. of Parks and Outdoor Recreation 1845 Sherman Denver, CO 80203

Director Nevada Dept. of Wildlife P.O. Box 10678 Reno, NV 89510

Mr. William McDonald, Dir. Colorado Water Conservation Board 823 State Centennial Bldg. 1313 Sherman St. Denver, CO 80203

Mr. William Strickland, Attorney at Law Strickland and Altaffer 802 Transamerica Bldg. Tucson, AZ 85701

Mr. William J. Metheny, General Manager Electric District No. 2 P.O. Box 66 Coolidge, AZ 85228

Mr. Leon Bowler, Manager Dixie Rural Electrical Association, Inc. Beryl, UT 84714 Mr. George L. Christopulos, State Engineer State Office Bldg., East Cheyenne, WY 82002

Director
New Mexico State Parks and
Recreation Commission
P.O. Box 1147
Santa Fe, NM 87503

Mr. Wesley E. Steiner, Dir. Arizona Dept. of Water Resources 222 North Central Ave., Suite 850 Phoenix, AZ 85004

Mr. Ross Elliott, Director Utah Div. of Parks and Recreation 1596 West North Temple Salt Lake City, UT 84116

Mr. Wilbert J. Carlyle, Chairman Ak-Chin Indian Community Route 2, Box 27 Maricopa, AZ 85239

Mr. Marvin Young, Consultant P.O. Box 1298 Coolidge, AZ 85228

Mr. R. D. Justice, Vice-Chairman and Manager Electrical District No. 7 Route 1, Box 662 Peoria, AZ 85345

Mrs. Betty J. Teagarden, Secretary Chandler Heights Citrus Irrigation District P.O. Box 38 Chandler Heights, AZ 85227 Mr. Floyd A. Bishop P.O. Box 53 Cheyenne, WY 82001

Mr. Antone Drennan, Sr., Chairman Colorado River Tribal Council Attn: Mr. Harvey Laffon Route 1, Box 23-B Parker, AZ 85344

Mr. Paul Pearce, Chairman Electrical District No. 4 of Pinal County P.O. Box 605 Eloy, AZ 85231

Mr. J. E. Turner, Chairman Electrical District No. 5 of Maricopa County P.O. Box 120 Mesa, AZ 85201

Mr. Tommy Long, Project Mgr. Yuma County Water Users' Assn P.O. Box 708 Yuma, AZ 85364

Mr. Charles F. Youngker, President Roosevelt Irrigation Dist. P.O. Box 95 Buckeye, AZ 85326

Arizona Municipal Power Users' Association 3003 North Central Ave., Suite 1402 Phoenix, AZ 85012

Mr. R. V. Knapp, Manager of System Operations Southern California Edison Co. P.O. Box 800 Rosemead, CA 91770 Mr. Calvin L. Rampton 800 Walker Bank Bldg. Salt Lake City, UT 84111

Mr. Vernon L. Nicholas, Attorney at Law Killian, Legg and Nicholas Queen Creek Irrigation Dist. 9 West Pepper Place Mesa, AZ 85201

Mr. Vincent Harvier, President Quechan Tribal Council Fort Yuma Indian Reservation P.O. Box 1352 Yuma, AZ 85364

Mr. Ed Leavitt Overton Power District P.O. Box 13 Bunkerville, NV 89007

Mr. Jackson Bogle, President Ocotillo Water Conservation District P.O. Box 487 Chandler, AZ 85224

Mr. H. D. Mayberry Navajo Tribal Utility P.O. Box 170 Fort Defiance, AZ 86504

Mr. Raymond C. Burt, Electrical Engineer in Charge of Operations Dept. of Water and Power City of Los Angeles Los Angeles, CA 90051

Arizona State Office Bureau of Land Management 2400 Valley Bank Center Phoenix, AZ 85073 Mr. H. S. Raymond District Engineer and Manager Maricopa County Municipal Water Conservation District No. 1 P.O. Box 730 Peoria, AZ 85345

Mr. James B. Ruch, State Director California State Office Bureau of Land Management 2800 Cottage Way Sacramento, CA 95825

Mr. William D. Woehlecke, Secretary and Manager Electrical District No. 5 P.O. Box 8 Red Rock, AZ 85245

Mr. Charles L. Strouss, Jr,
Attorney at Law
Jennings, Strouss and Salmon
Ocotillo Water Conservation
District
111 West Monroe St.
Phoenix, AZ 85003

Mr. William F. Lynch Lincoln County Power District No. ! SR 89063 - BOX 101 Ploche, NV 89043

Mr. Byron Miller Nevada Power Co. P.O. Box 230 Las Vegas, NV 89101

Mr. Richard L. Morgan, Staff Assistant, Area Ofc. Fish and Wildlife Service 2953 West Indian School Rd. Phoenix, AZ 85073

Mr. Bob Bond, Engr in Charge, western Boundary Projects, United States Section International Boundary and Water Commission P.O. Box 5737 Yuma, AZ 85364 Mr. Felix Sparks 7900 West 23rd Ave. Lakewood, CO 80215

Mr. A. J. Faul, President Arizona Power Pooling Assn. Route 1, Box 69 Coolidge, AZ 85228

Mr. J. F. Friedkin, Commissioner, U.S. Section, International Boundary and Water Commission 4110 Rio Bravo El Paso, TX 79902

Mr. Frank Campbell Air Force Contracting Office Procurement Div. 6510 ABG/PMB-3 Edwards Air Force Base CA 93523

Mr. R. J. Ellis, Attorney at Law Rawlins, Ellis, Burris and Kiewit 2300 Valley Bank Center 201 North Central Ave. Phoenix, AZ 850/3

Mr. Leroy Michael, Jr.,
Assistant General Manager
Planning and Resources
Salt River Project
Agricultural Improvement
and Power District
P.O. Box 1980
Phoenix, AZ 85001

Water & Power Resources Svc. Engineering & Research Center Attn: D-400 P.O. Box 25007 Denver, CO 80225

Mr. Gordon D. Jorgenson, IEDA 1507 1st Federal Savings Bldg. Phoenix, AZ 85012 Mr. Myron B. Holburt, Chief Engineer Colorado River Board of California 107 S. Broadway, Rm. 8103 Los Angeles, CA 90012

Mr. Richard R. Williams Electric Utility Director City of Mesa P.O. Box 1466 Mesa, AZ 85201

Mr. Curtis Geioganah, Area Director Phoenix Area Office Bureau of Indian Affairs P.O. Box 7007 Phoenix, AZ 85011

Mr. Louis H. Winnard, General Mgr. and Chief Engr. Dept. of Water and Power City of Los Angeles P.O. Box 111 Los Angeles, CA 90051

Major Thomas J. Fitzgerald Chief, Base Contracts Ofc. (LGC) Headquarters USAF 82nd Flying Training Wg.(ATC) Williams Air Force Base, AZ 85224

Mr. D. O. Onstad, Dist. Mgr. Western Area Power Admin. Department of Energy P.O. Box 6457 Phoenix, AZ 85005

Water & Power Resources Svc. Engineering & Research Center Attn: D-700 P.O. Box 25007 Denver, CO 80225

Mr. Paul L. Billhymer, Executive Director Upper Colorado River Commission 355 South Fourth East St. Salt Lake City, UT 84111 Mr. James C. Payne Overton Power District P.O. Box 374 Overton, NV 89040

Mr. J. B. Flanders, General Manager Arizona Electric Power Cooperative, Inc. P.O. Box 670 Benson, AZ 85602

Mr. W. H. Fell General Manager and Chief Engineer Public Service Dept. City of Glandale 159 North Glandale Glandale, CA 91206

Mr. Milt Ray, Manager Electrical District No. 3 of Pinal County 711 East Cottonwood Lane, Suite C Casa Grande, AZ 85222

Mr. Donald A. Twogood, General Manager Imperial Irrigation District P.O. Box 937 Imperial, CA 92251

Mr. W. E. Jones Lincoln County Power P.O. Box 417 Pioche, NV 89043

Water & Power Resources Svc. Engineering & Research Center Attn: D-1000 P.O. Box 25007 Denver, CO 80225

Mr. Robert L. McPhail,
Administrator
Western Area Power Admin.
Department of Energy
P.O. Box 3402
Golden, CO 80401

Mr. R. Keith Higginson, Commissioner Water & Power Resources Svc. Washington, D.C. 20240

Mr. Bruce Eliason Environmental Services Supervisor California Dept. of Fish and Game 350 Golden Shore Long Beach, CA 90802

Mr. Gerald Williams National Weather Service River Forecast Center Executive Terminal Bldg. 337 N. 2370 West Salt Lake City, UT 84116

Mr. Jim Tucker Flood Plain Administrator Mojave County 301 W. Beale St. Kingman, AZ 86401

Mr. Ken Edwards, Chief Engineer Riverside County Flood Control and Water Conservation District 1995 Market St Riverside, CA 92502

Mr. Huey M. O'Dell Mayor, City of Needles 205 North K Street Needles, CA 92363 Mr. R. A. Olson, Area Mgr Boulder City Area Office Western Area Power Admin. Dept. of Energy P.O. Box 200 Boulder City, NV 89005

Mr. Dennis Wood, District Supervisor Pacific Gas and Electric Topack Compressor Station P.O. Box 337 Needles, CA 92363

Mr. N. W. Plummer, Regional Director, Upper Colorado Region Water and Power Resources Svc. P.O. Box 11568 Salt Lake City, UT 84147

Mr. Donald B. Fortney, Dir. Dept. of Public Works County of Yuma 2703 Avenue B Yuma, AZ 85364

Mr. Lou Vita, Flood Control and Development Engineer Clark County Flood Control 401 S. 4th St. Las Vegas, NV 89101

W. J. Newman, State Engineer Division of Water Resources 201 S. Fall St. Carson City, NV 89710 Mr. Albert Gabiola, Area Mgr. Salt Lake City Area Office Western Area Power Admin. Dept. of Energy 175 North 2400 West Salt Lake City, UT 84116

Mr. Eugene Hinds, Regional Director, Lower Colorado Region Water and Power Resources Svc. P.O. Box 427 Boulder City, NV 89005

D. F. Lawrence, Director Utah Div. of Water Resources Suite 300, Empire Bldg. 231 E. 400 South Salt Lake City, UT 84111

Mr. Carl Schwettman Imperial County Emergency Services Office 2514 Labrucherie Rd. Imperial, CA 92251

Mr. C. J. DiPietro
San Bernardino County Flood
Control District
825 E. Third St.
San Bernardino, CA 92415

Comments and Responses

Federal Agencies	Page
U.S. Department of Agriculture, Soil Conservation Service April 20, 1981	G-11
U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Weather Service, Colorado Basin River Forecast Center March 19, 1981	G-12
U.S. Department of Energy, Western Area Power Administration May 29, 1981	G-13
U.S. Department of the Interior, Bureau of Indian Affairs, Colorado River Agency April 7, 1981	G-14
U.S. Department of the Interior, Bureau of Indian Affairs, Phoenix Area Office March 27, 1981	G-15
U.S. Department of the Interior, Bureau of Indian Affairs, San Carlos Irrigation Project May 5, 1981	G-16
U.S. Department of the Interior, Bureau of Land Management, Arizona State Office June 2, 1981	G-17
U.S. Department of the Interior, Bureau of Land Management, Sacramento, California March 23, 1981	G-18
U.S. Department of the Interior, Fish and Wildlife Service, Area Office, Arizona-New Mexico August 20, 1981	G-19
International Boundary and Water Commission, United States and Mexico, United States Section April 24, 1981	G-20
State Agencies	
Arizona Game and Fish Department May 21, 1981	G-21
State of California, Department of Fish and Game	G-22

May 29, 1981	U=24
Upper Colorado River Commission May 11, 1981	G-26
State of Nevada, Division of Colorado River Resources June 8, 1981	G-27
Nevada Department of Wildlife May 21, 1981	G-28
New Mexico Interstate Stream Commission August 28, 1981	G-29
State of Utah, Division of Water Resources September 3, 1981	G-31
State of Wyoming, State Engineer's Office August 12, 1981	G-34
Local Agencies and Private Interests	
Ellis & Baker, P.C., Attorneys at Law May 29, 1981	G-36
Department of Public Works, Las Vegas, Nevada May 28, 1981	G-37
Las Vegas Valley Water District May 28, 1981	G-38
Department of Water and Power, the City of Los Angeles June 1, 1981	G-39
The Metropolitan Water District of Southern California June 24, 1981	G-40
Office of the Flood Plain Administrator, Mohave County May 28, 1981	G-41
San Bernardino County Flood Control District March 25, 1981	G-42
Southern California Edison Company	G-43

NO RESPONSE REQUIRED.

Soil Conservation Service

Loner CO River RCaD Office P. O. Box 834 Parker, Arizona 85344

April 20, 1981

Department of the Army Los Angeles District, Comps of Engineers P. O. Box 2711 Los Angeles, California 90053

Please send us oxpies of the drafts of the Evaluations of the Alternative Flood Control Operation Plans for the Colorado River Basin and the Hoover Dam, Review of Flood Control Regulations, dated Pebruary, 1981. Re: Flood Control Operation Plans

Thenk you.

John & Calver Jajap

John F. Colvin, Jr. Red Coordinator



3

U.S. DEPARTMENT OF COMMENCE
Resional Gosanic and Atmospheric Administration
NATONAL WEATHER SERVICE
Colorado Bason River Forecast Center
337 North 2370 West
Salt Lake City, Utah 84,116

March 19, 1981

Roger C. Higbee Lieutenant Colonel, CE Acting District Engineer P O Box 2711 Los Angeles, Californie 90053

Dear Lt. Col. Higbee:

The hydrologist in charge, Colorado Basin River Forecast Center recommends that alternative plan no. 1 be adopted and implemented as the flood operation plan for Hoover Dam.

- The plan possibly should be revised to include operations of the Central Arizona Project at the time that project becomes operational.
- 2 Manuals and document should include the suggestions by District Engineer of USCOE and Regional Director WFRS.

Sincerely,

rald Williams

Mydrologist-in-Charge

Response to letter from U.S. Department of Commerce, Mational Meather Service dated March 19, 1981.

- As stated in the report's recommendations, the Hoover Dam flood control operation plan is to be reviewed for appropriateness and relevance after full implementation of the Central Arizona Project.
- 2. An updated water control manual for Hoover Dam is already under preparation and will be finalized subsequent to the conclusion of this study.



Department Of Energy

Western Area Power Administrator PO Box 3402 Goden Colonado 8040)

MAY 2.9 1961

IN REPLY REFER TO: A6000 Lieutenant Colonel Roger C. Higbee Acting District Engineer Los Angeles District, Corps of Engineers Department of the Army Los Box 2711 Los Angeles, CA 90053

Dear Colonel Higbee:

As requested by your March 10, 1981 letter, we have reviewed the February 1981 draft report on "Colorado River Basin - Hoover Dam - Review of Flood Control Regulation."

We were pleased to note that the impacts on power operations and energy generation were considered in evaluating the various flood control altermatives. We realize that the stepped release patterns for Moover Dan were based primarily on the threshold of impending flood damages. Nevertheless, this stepped release pattern will allow greater flexibility in our power marketing program during flood control operations. It should be recognized homever, that the August initiation of the winter drawdown period may require special coordination with the Upper Basin to avoid risking the loss of operation?

In general, it is our opinion that the report is adequate and comprehensive in both scope and approach in analyzing the flood control problems and many associated impacts on the Lower Colorado River. Thank you for the opportunity to review and comment on this report.

Sincerely,

Robert L. Refinali

NO RESPONSE REQUIRED.

ited States Department of the Interior BUREAU OF INDIAN AFFAIRS COLORADO RIVER AGENCY ROUF 1, Br. 9C. Parker, Arisons 8541

TO SECULT MENTS TO

Land Operations - Irrigation (602) 669-2187

April 7, 1981

Lt Col. Roger C. Higbee Acting District Engineer, Los Angeles District, Corps of Engineers P. O. Box 2711 Los Angeles, California 90053

Dear Colonel Higbee:

We have reviewed your flood control plan and feel that alternate I does provide the most feasible and effective operational procedure to meet the requirements for both power and irrigation requirements. We would also recommend that sustained flows above the 28000 CFS be avoided if at all possible because of the detrimental effect on the irrigable land along the river. Sustained flows above 28000 CFS will raise the ground water table in the land and also build up salinity in the soil.

Sincerely,

Watt. KMWa Superintendent

United States Department of the Interior BUREAU OF INDIAN AFFAIRS PHUENA AREA OFFICE P. 0. Box 7007

Phornia, Arizona 85011

March 27, 1981

Lt Col. Moger C. Highe: Acting District Engineer, Los Angeles District, Corps of Engineers P.O. Box 2711 Los Angeles, California 90053

Dear Colonel Higbee:

We have reviewed your flood control plan and do not wish to make any specific comments at this time. We prefer to allow the individual agencies and Tribes to make their own evaluation and comments concerning the plan. We feel that they are in a better position to see how the plan and its alternatives would affect their localities.

Thank you for providing us a copy of your plan.

Sincerely,

R. J. J. J. J. S. S. C. L. ASSISTANT Area Director

United States Department of the Interior BUREAU OF INDIAN AFFAIRS SAN CARLOS IRRIGATION PROJECT

Coolidge, Arizone 85226 P.O. Box 456

May 5, 1981

Noger C. Higree Lieutenant Colonel, CE Acting District Engineer Department of Army Los Angeles District Corps of Engineers P.O. Box 2711 Los Angeles, California 90053

Dear Sir:

Your study of the flood control operation plan of Hoover Dam has been reviewed by personnel in this office. We approve of your conclusions and recommendations.

NO RESPONSE REQUIRED.

G-16

VALUE

IN BEPR A REFER TO



United States Department of the Interior

T220 (932)

BUREAU OF LAND MANAGEMENT ANIZONA STATE OFFICE MOD VALLEY BANK CENTER PMOENIX. ANIZONA 18073 June 2, 1981

Department of the Army Los Angeles District Corps of Engineers P.O. Box 2711 Los Angeles, CA 90053

Gentlemen:

We appreciate the opportunity to review and comment on the draft Flood Control Operation Flan for Hoover Dem. We have both concerns and suggestions as explained below.

The preferred alternative, which involves water releases of 40,000 cubic feet per second, would have considerable impact on existing recreation developments and activities along and in the Colorado River. These impacts should be better quantified in relation to increased flows, since the existing discussion is rather general. Based on similar flows which occurred during 1980, impacts which should be addressed include flooding of campgrounds at Fisher's Landing, boat-in campground in the Picacho State Recreation Area and beach areas at Ruverside Park in Yuma. In addition, the projected flows would disrupt general recreation use along the river and result in cancellation of some organized events, such as the Yuma inner tube race.

The higher flow projections and potential flood hazards are the primary reasons for (1) the relocation of camping outside the floodplain below imperial Dem, and (2) the termination of residential leases in the same areas. While these flows impact recreation opportunities, they have been anticipated and incorporated into Yuma District recreation plans and management. These would be logical mitigation measures to include in the document.

lan All Miller Clark Millock State Director

The state of the s

Response to letter from U.S. Department of the Interior, Bureau of Land Management, Arizona State Office, June 2, 1981.

Hanagement, Arizona State Office, June 2, 1981.

1. Large flood control releases called for in any of the alternative flood control operating plans evaluated will have significant impacts with respect to recreational developments and activities along the lower Colorado River. In that these impacts have a relatively small economic value as compared with other factors, auch as water conservation, power, and flood damages, the impacts are temporary in nature and are shared by all plans; they would not materially influence the selection of the flood control plan. Hence, a detailed evaluation was not undertaken. It appears, however, that your agency has implemented appropriate mitigation measures in light of the recently increased chances of flood control releases from Hoover Dam.

United States Department of the Interior

7221 C-932.2

BUREAU OF LAND MANAGEMENT

SACTE OFFICE Federal Office Building 2800 Cottage May Sacremento, California 99825

Roger C. Highee, Lt. Col., CE
Department of the Army
Los Angeles District, Corps of Engineers
P.O. Box 2711
Los Angeles, Calif. 90053

Dear Colonel Highee:

no comments on the study. The proposed selection of Alternative I appears We have reviewed the Draft Review of Flood Control Regulation and have

to be reasonable, with Alternative 2 being a close second place.

Richard F. Johnson Chief, Division of Resources



DEPARTMENT OF THE INTERIOR FISH AND WILDLIFE SERVICE AREA OFFICE, ARZONA - NEW PEXTOO

AREA OFFICE, ARIZONA - NEW MEXICO 2953 W. INDIAN SCHOOL ROAD PHOENIX, ARIZONA 85017 August 20, 1981

Col. Gwynn Teague, District Engineer Corps of Engineers Dept. of the Army P.O. Angeles District P.O. Box 2711 Los Angeles, California 90053

Dear Col. Teague:

We have reviewed your draft report "Colorado River Basin Hoover Dam, Review of Flood Control Regulation" dated February 1981. As brought out in the report beneficial as well as adverse impacts on fish and wildlife and their associated habitat can be anticipated with the release of sustained high flows.

- 1 Under past operating conditions winter low flows sometimes drop below that desired for maintenance and use of aquatic resources associated with the river. A concerted effort should be made to prevent extremely low winter flows. The 4000 ofs flow suggested by the California Department of Fish and Game should be an acceptable minimum.
- 2 Every effort show rade to hold releases to nondamaging levels and to coordinate released to low plant growth and wildlife reproduction. Thus, righ flows during the spring and early summer months should be refused to the extent possible,

While adverse impacts can be anticipated with higher flows through the loss of existing marshes and backwaters, such impacts may be offset by the formation of new ones.

We recognize the need for increased flood flow releases. The opportunity to review the report is appreciated,


Sincerely,


Area Manage

cc: USFWS, Ecological Services, Phoenix, Al

Response to letter from the U.S. Department of the Interior, Fish and Wildlife Service, Area Office, Arizona-New Mexico, dated August 20, 1981.

- 1. The suggested 4000 cubic feet per second minimum winter flow falls w'.hin the normal operating criteria rather than the flood control operation, which, by definition, addresses periods of high flows. is recommended that further direct coordination with the Bureau of Reclamation on this matter be undertaken.
- 2. The selected alternative plan is designed to control spring and early summer runoff to the lowest release step or rate considered appropriate within flood control operation.

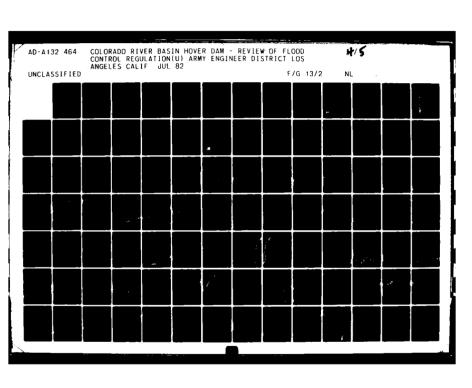



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS 1963 4

Contract Contract

INTERNATIONAL BOUNDARY AND WATER COMMISSION UNITED STATES AND MEXICO IBWC BUILDING 410 RIO BFAVO ELPASO, TEXAS 78802

APK 24 1981

Col. Gwynn A. Tesgue, District Engineer Corps of Engineers, Los Angeles District P. O. Box 2711 Los Angeles, California 90053

Dear Col. Teague:

We appreciate the opportunity to review the draft joint report, "Colorado River Basin, Boover Dam, Review of Flood Control Regulation, February, 1981," provided with your letter of March 10, 1981.

The study was fully coordinated with the International Boundary and Water Commission, including joint meetings with Mexican authorities. The report adequately covers the international considerations.

I am pleased to advise that the U. S. Section concurs in the recommendation that Alternative I be adopted and implemented as the flood control operation plan for Boover Dam. We believe that the implementation of Alternative I will provide the best balance between flood control and water supply operations insofar as international considerations are concerned.

NO RESPONSE REQUIRED.

We appreciate the opportunity to have participated in the study and to provide comments on the draft report.

Sincerely

J. Friedkin Comissioner

Mr. Eugene Hinds
Regional Director
Lower Colorado Region
Water and Power Resources Service ະ

G-20

\$3

MICT BARRY COUNTY

C GENE TOLLE, Prophiz. Charm WILLAM H BERS Procor CHARLES F ROBERTS, OD SAN PRANK FERGUSCOL, IN VARIA FRANCES W WERMER? TUCKOR Dominio AMATZEN

ARIZONA GAME & FISH DEPARTMENT

0005-500 Ohous Augus 65023 2222 Wet Growing Road 86401 eet; Kingman, Arizona 1420 W. Beale

21, 1981

Acting District Engineer
Department of the Army
Los Angeles District, Corps of Engineers C. Higbee Lieutenant Colonel Roger P. O. Box 271

Dear Colonel Higbee:

Los Angeles, California

90053

The Arizona Game and Fish Departme: has examined the Disit Review of Flood Control Regulation for the Colorado River below Hoover Dam, dated February 1981, and we offer the following specific comments on the text of the Draft:

Page 8, paragraph 1.

The word arthropad should be arthropod

Page 19, paragraph

The term "rare and/or endangered" occurs two times in this paragraph. We recommend the substitution of the term "endangered" or "threatened", as this reflects the terminology currently in use. The paragraph implies that both peregrine and prairie falcons are classified as threatened or endanger: d; however, only the peregrine falcon is classified as "endangered".

Page 20, paragraph 1.

Bony tail should be one word: bonytail. As well as being designated as "rare" in California, the bonytail chub is federally designated as "endangered" and is classified as Group II (in danger of being eliminated) in Arizona.

Lt. Colonel Roger C. Higbee - 2

May 21, 1981

in the same sentence, reference is made to the humpback sucker which is the commond that this be changed to razorback sucker which is the commonly accepted name for this species. Additue suggest it be added that the razorback sucker is also lin as Group III (a species whose status may be in jeopardy inforeseeable future) in Arizona.

1y,

Page 43, Alternative 8.

-

"The plan would not permit an increase in diversions to MWD, so the entire reduction in storage would be lost to the Gulf of Nexico." Gulf of Mexico should be Gulf of California.

Appendix E, page 8, last paragraph.

The current federal list of endangered and threatened wild-life does not include the Tule white-fronted goose, as this paragraph implies.

Appendix E, page 13.

Paragraph 1

As of April 24, 1980, the bonytail chub was officially listed as an endangered species of the U.S. Fish and Wildlife Service.

Paragraph 2.

On May 27, 1980, the Fish and Wildlife Service withdrew the proposal to list the razorback sucker as threstened.

Alternative 6. This alternatives, the Department supports Alternative 6. This alternative allows for the smallest water level fluctuations on Lake Mead during the space-building period between August 1 and January 1. A decrease in the magnitude of water level fluctuations on Lake Mead should help to stabilise the aquatic ecosystem in the lake. According to Table 7, Appendix E, the maximum sustained flows below Roover Dam allowed by Alternative 6 would be adequate for flood control during all flood frequencies considered. Furthermore, the proposed releases under Alternative 6 would not be substantially different from those proposed under Alternative 1. During sustained flows of 35,000-40,000 e.f.s., we believe that some mestanted flows of downstream addimentation may occur on the riverine portions of the Colorado River below Hoover Dam, however, this would be offset somewhat by the improved water quality and Angressed march

Lt. Colonel Roger C. Higbes - 3 -

May 21, 1981

habitat produced by higher water levels in the backwaters between Devis Dam and Topock Gorge.

Thank you for the opportunity to comment on this proposel.

Sincerely,

Roger J. Gruenewald, Deputy Director

relikal (Exlant
Richard A. Gerhart
Acting Habitat Evaluation Specialist
Ringman Regional Office

cc: Planning and Evaluation Branch, Phoenix Don Wingfield, Supervisor, Yuma Regional Office

Nesponse to latter from Arizona Game & Fish Department, dated May 21, 1981.

1-6. Comments 1 through 6 have been incorporated into the text of this report.

It is acknowledged that alternative 6 with a January 1 flood control apace requirement of 4.5 million acre-feet (MAP) would tend to produce less water murface elevation fluctuation in lake Need Garing the Angust 1 to January 1 flood control space requirement between difference in January 1 flood control space requirement between alternative 1 (5.35 MAP) and alternative 6 (8.50 MAP) was located in alternative storage space in water surface elevation would be 6 feetive storage space in water surface elevation would be effective storage space in upstream reservoirs would tend to minimize differences in actual January 1 water surface elevations in Hoover Dam among the various alternatives. ÷

Selection of alternative 6 instead of alternative 1 would mean foregoing everage annual net benefits of \$197,000 (see table 5 in min report). In addition, although alternative 6 proved roughly equivalent to alternative 1 in capability of controlling the quivalent to a lternative 1 in capability of controlling the 1000-year-flood event (appendix A, table A-5), it should be noted that it was significantly less effective for the 333- and 500-year events. Because alternative 6 limits maximum flood control releases to 40,000 cubic feet per second with the exception of uncontrolled spilling visuase of 73,000 cubic feet per second) in controlling events larger than the 1000-year flood.

AUND G. SROWN JR., General

DEPARTMENT OF FISH AND GAME 350 Golden Shore Long Beech, GA 90802 (213) 590-5113 STATE OF CALIFORNIA -- MEDUNCES ABBINCY

March 24, 1981

12. Colonel Highes, Acting District Engineer U. S. Arry Corps of Engineers Lies Angeles District P.O. Box Z/11 Los Angeles, GA 90053

Dear Colonel Highes;

Your letter of March 10, 1961 to Mr. Bruce Eliason of my office formally requested comments by June 1, 1961 with respect to the joint study report "Colorado River Basin," Hover Dam - Raview of Flood Control Regulation" Draft dated February, 1961 prepared by the U. S. Army Corps of Engineers, Los Angeles District and the Lower Colorado Region, Water and Power Resources Service.

Although we plan to provide the Department's review comments and wiews as to the most appropriate flood control alternative by the requested date, it will be helpful if you would submit the formal request for review to the Director, Department of Fish and Gene. The Department's formal response will need to come from the Director and your submittal of the formal request to him will satisfied appropriate schedules and easignments within the Department. These are necessary in order to obtain a thorough, multi-disciplinary review as to the potential fish and wildlife influences resulting from the proposed action.

Thank you for your consideration in this matter.

Willy Collection Fred & Sorthley Jr. Regional Manager Region 5

Ş



May 29, 1981

Lieutenant Colonel, CE Acting District Engineer Los Angeles District, Corps .. Engineers Post Office Box 2711 Los Angeles, California

Dear Colonel Higbee:

We have reviewed the draft "Review of Flood Control Regulations, Colorado River Basin, Hoover Dam" dated February 1981.

We concur in your selection of Alternative No. 1 as the best flood control operation plan for Hoover Dam. We also concur in your medification to the 1968 flood control operation plan which limits the fall months flood control space-building releases from Lake Mead to a non-damaging level of 28,000 cubic feet per second by extending the drawdown period two additional months.

In addition to the above comments, we also have the following detailed comments on the text of the report, identified by page and paragraph numbers: Page 14, first full paragraph. In addition to encroachment of structures on the flood plain, mention should be made of the encroachment of vegetation, especially in the Yuma area, which also reduces the flood-carrying capacity of the river.

Page 18, fourth paragraph. It should be mentioned that because of the extensive growth of vegetation in the floodway at Yuma in recent years, the existing levees are no longer capable of containing their design flows and that a study is currently under way to assess means of solving this problem.

Page 20, first full paragraph. In order to present a more accurate and comprehensive description of the apportionment of Colorado River Basin water supply, we recommend that this paragraph be rewritten as follows:

"The Colorado River Compact of 1922 divided the water between the Upper and Lower Basins with the division point at Lee Ferry, located in northern Arizona near the Utah border. The Compact also divided the states

into an Upper Division, consisting of the States of Colorado, New Mexico, Utah, and Wyoming, and a Lower Division consisting of the States of Arizona, California, and Nevada. Each Basin was apportioned the right to beneficial consumptive use of 7.5 million acre-feet (maf) per year from the Colorado River System. In addition, the Lower Basin was given the right to increase its use by 1 maf per year. The Compact states that any required delivery of wate, to Mexico shall be supplied first from water surplus to the foregoing apportionments (a total of 16.0 maf a year) and that if the surplus is insufficient, the burden of the deficiency shall be borne equally by the Upper and Lower Basins. It provides that the states of the Upper Division will not cause the flow at Lee Ferry to be depleted below 75 maf for any period of 10 consecutive years.

agreed to deliver to Mexico a guaranteed 1.5 maf annually from the Golorado River, with an additional 0.2 maf per year to be delivered when there exists a surplus, as extraordinary drought, Mexico's allotment is to be reduced in the same proportion that consumptive uses in the United States are reduced. In the 1944 U.S.-Mexican Treaty, the United States

In addition to the Compact and the Treaty, apportionments of water in the Colorado River Basin are subject to many other documents such as water supply contracts, iederal laws, and decrees of the U.S. Supreme Court."

page 20, second full paragraph, and Table 2, page 23. Table 2 presents data as of 1975. There are more recent data available which should be used in lieu of the 1975 data. The uses for the Upper Basin should be increased by about 550,000 acre-feet (the exact figure would depend upon the year finally selected) to account for Colorado River Storage Project reservoir evaporation. Lower Basin uses should be further qualified by a footnote that would state that the uses are subject to being reduced to reflect return flows to the river that are presently unaccounted but which are being quantified through an on-going Bursau of Reclamation study of these unmeasured return flows. All of the data on the table were not available from the source identified in the footnote to the table, and the other sources used should also be identified. Footnote be starts out with a prepositional phrase that is not a sentence and should probably be eliminated.

Colonel Roger C. Higbee May 29, 1981 Page three When the changes indicated above are made in Table 2, and are then carried over to the text on page 20, we recommend that a further change be made to the text. Since water supply data for the river usually is referred to in terms of virgin flow at Lee Ferry, we suggest that the flow above Hoover Dam, referred to herein, be separated into flow at Lee Ferry of about 14 maf/yr and tributary flow of about 0.9 maf/yr.

Finally, we recommend that the date for full operation of the Central Arizona Froject be revised to reflect current schedules, which would be a few years later than the year 1986 stated in this paragraph. We suggest that you contact the Bureau of Reclamation at Boulder City for the current schedule.

should be rewritten to reflect the current status of (a) the river's salinity lavels and reasons therefor, (b) potential salinity control projects, and (c) salinity damages. We suggest that the Bureau of Reclamation's Colorado River Water Quality Office in Denver be requested to provide updated information.

This concludes our comments. Please let me know if you have any questions regarding any of the above comments.

Very truly yours,

Myron B. Holburt Chief Engineer

cc: Eugene Hinds

Response to letter from Colorado River Board of California, dated May 29, 1981.

1-4. The text of the report has been modified to incorporate comments 1 through 4.

The statement in the text of the draft report was factually correct and adequately served to illustrate the desired point; hence no change was made.

š

 No change in the text of the report was made because the dates given reflect current schedules for full operation of the Central Arizona Project.

 The water quality section of the report has been updated as suggested after coordination with the Bureau's Colorado River Water Quality Office.

UPPER COLORADO RIVER COMMISSION

315 South Poweth Bast Street Sale Lake Ony. Unah 84111

May 11, 1981

Mr. Joe Evelyn Los Angeles District Corps of Engineers P. O. Box 2711 Los Angeles, California 90053

Dear Mr. Evelyn:

This will confirm our oral conversation of May 4th requesting a 60-day time extension from June 1, 1981 for comments on the "Draft Review of Flood Control Regulations, Colorado River Basin, Hoover Dam." It is our understanding that you will accept comments from Upper Basin interests within the above-mentioned time frame.

I trust that this is your understanding of our conversation at the meeting of the Upper Colorado River Commission's Legal and Engineering Committees, and that no further request or confirmation is required. Please advise if the above is not your understanding.

On behalf of our Legal and Engineering Committees, I wish to thank you for your explanation of the informational review.

Very truly yours,

Coulf Billhymer
Faul L. Billhymer
Executive Director

PLB:hiw

STATE OF NEVADA

DIVISION OF COLORADO RIVER RESOURCES

*ELEPHONE 1702: 733-7755

A BOS 18080 P. D. BOS 18080 LAS VERAS HEVADA 88118

June 8, 1981

OFFICE ADDRESS
4220 MANYLING PARKWAY
BUILDING S SUITE 402
LAS VERAS NEVADA 98109

Lt. Col. Roger C. Higbee
Acting District Engineer
Department of the Army
Los Angeles District, Corps of Engineers
P. O. Box 2711
Los Angeles, California 90053

Dear Mr. Higbee:

This is to furnish our comments as requested by your letter of March 10, 1981, which transmitted a draft report documenting the evaluation of nine alternative flood control plans.

Of the alternative flood control operation plans studied, it was selected. Given the assumptions and associated uncertainties inherent in such a study, we feel Alternative I and Alternative 2 to be equally acceptable. We do not, however, find any reason to be critical of the selection of Alternative 1.

We appreciate the opportunity comment.

NO RESPONSE REQUIRED.

MORL A CLAME DIRECTOR

G-27

A DIVISION OF THE DEBARTMENT OF ENERGY

A to the second of the second Nevac

Department

P.O. BOX 10678 HOO VALLEY ROAD

May 21, 1981

RENO. NEVADA 89520

TELEPHONE (702, 784-6214

Lieutemant Colonel, CE Acting District Engineer Department of the Army Los Angeles District, Corps of Engineers P.O. Box 2711 Los Angeles, CA 90053

Dear Colonel Higbee:

The Nevada Department of Wildlife appreciates the opportunity to review and provide comments on Colorado River Basin Hoover Dam - Review of Flood Control Regulations (Draft), February 1981.

The Department of Wildlife is concerned with flood flow management on the Colorado River as it relates to water operations on Lake Mead and Lake Mohave.

It is difficult to identify gains or losses in the value of recreational fishing from the data presented in the various alternatives. Our major interest is in annual and seasonal water elevations and the effect on fish habitat in the littoral zone. We have developed general criteria for management of these shoreline areas that are crucial to production and survival of largemouth bass.

We are aware that no legal recognition was given to fish and wildlife values in the Boulder Canyon Project Act. However, these values have developed and should be given adequate consideration under the Wildlife Coordination Act in any major modification of water operations.

We will support any alternative that provides increasing water elevations during late winter, spring and summer seasons and annual stability within anximum and minimum elevation ranges. It appears that these conditions could be often met in trade-off with upper basin reservoirs. The objective is to provide an optimum habitat condition of terrestrial and squatic vegetation.

Colonel Higbee May 21, 1981 Page 2

The review contains no economic assessment of the values of sport fisheries relative to each alternative, and we believe that some attention should be directed to this factor as an integral part of flood flow management.

If you have any questions relative to these concerns, please contact this office at your estilest convenience.

Joseph C. Greenley Sincerely Director

W.C. Pu

Region III Game Division Fisheries Division cc: State Clearinghouse

Response to letter from Nevada Department of Wildlife,

Gred May 21, 1981

1. It is sokmowledged that fluctuations in water surface elevation in lake based have a significant impact on terrestrial and aquatic vegetation as well as on sport fitheries. It should be recognized, however, that the major feal in selection of a flood control operating plan is to establish a means of controlling flood inflows to designated rates domastream to permit orderly utilization of the river and its flood plain. All flood control plans, both those common element the evacuation of reservoir space in the fall and witner months to emable the opture and control of spring and erly ammer runoff. Hence, relatively large fluctuations in water sarface elevations are an inevitable result of any flood control operation.

The alternatives having the smallest lanuary ! flood control space requirement (%.5 million more-feet) would tend to have the least owerell fluctuation in mater surface elevation at Lake Mead. Alternatives with 5.55 million more-feet of required January ! storage space would not result in significantly different sater surface fluctuations at Lake Mead because of the credit given to evailable storage space in upstream reservoirs.

A detailed economic assessment of the values of sport fisheries relative to each alternative was not undertaken because the differences in water surface fluctuations between the alternatives is relatively small making the seguitude of the economic benefits of aport fisheries unlikely to materially influence selection of the best flood control plan. It is particularly the case because the alternative plans were formulated in an attempt to maximise benefits to the matherised project purposes of flood control, water supply, and power. ď

NEW MEXI.

FERSTATE STREAM COMMISSION

BATAAN MEMORIAL BUNLDING STATE CAPITOL JATA FE, NEW MEXICO STROS



HILTON A DICKBON, JR., R. F. REVINCI OR BESTELLIN

CHARLES IN TAMBEY, (

August 28, 1981

Lieutenant Colonel Roger C. Rigbee Acting District Engineer Los Angeles District, Corps of Engineers

Los Angeles, California

Dear Colonel Highes:

The draft report on Review of Flood Control Regulation, Boower Dam, dated February, 1981, transmitted by your March 10 letter, has been reviewed and the following comments are offered.

The report recommends the selected plan, Alternative 1, be adopted and implemented as the flood control operation plan for Hoover Dam in lieu of the 1968 requisation. This recommendation by the District Engineer is concurred in by Bugene Hinds. Regional Director, Bureau of Reclamation, Lower Colorado Region.

As we understand, Alternative I would modify the 1968 regulation by extending the space-building release period to include the months of August and September. Extension of the space-building releases to include August and September results from lower release rates from Boover Dam than used in the 1968 regulation. The lower release rates are occasioned by adoption of the objectives of not damaging encreachments in the flood plain below Boover Dam, which limits release rates to 28,000 cubic feet per second, and of enhancing power generation by limiting spacebuilding releases to the capecity of the power plants; the capecity of the Parker Power Plant is 19,000 cubic feet per second.

The longer release period places an unfair risk of subsequent deficiencies in flow on the Upper Colorado River Basin because of provisions of Section 602(a) of Public Law 90-537. Under the documents which constitute the "Law of the River", beneficial consumptive use of waters of the Colorado River is the first priority, while electric power production is the lowest priority. Maximum consumptive use requires full utilisation of the conservation capacity of the reservoirs of the Colorado River and increased

Libutenant Colonel Roger C. Higbee August 28, 1981 Page Two power production based on release rates from Hoover D.m limited to power plant capacities cannot be undertaken at the risk of losing water for beneficial consumptive use.

The proposal presented in the draft places too much emphasis on the maximization of power production and protection of construction which has encroached on the Lower Colorado River 1 plain, thus risking a negative effect on water supply availa. the Upper Basin states. Supply - Present and Projected Needs" and Table 2 on page 23, referred to in the discussion on page 20, together give the impression that the Colorado River Compact applies in the Lower Basin only to the flow of the main stem of the Colorado River. The Colorado River Compact applies in the Lower Colorado River System between the Upper of Waters of the entire Colorado River System between the Upper and Lower Basins, as well as providing for future treaty deliveries to Mexico. Table 2 accounts only for uses and exports from the main stem of the Lower Colorado River and all uses in the Upper Basin. A notation to the table states that the data ware taken from the Bureau of Reclamation reports "Compilation of Records in Accordance with Article V of the Decree of the Supreme Court of the United States in Arizona vs. California, dated March 9, 1964. This cannot be correct; the cited "Compilation" does not include data on Upper Basin uses. The data in Table 2 for the Upper Basin apparently are taken, not from the aforementioned compilation, but from the Bureau's report entitled "Colorado River System Consumptive Uses and Losses, 1971-1975." That report also includes data on uses from the tributaries in the Lower Basin. The discussion on page 20 and Table 2 should be revised to include all uses of Colorado River System water. In the alternative, Table 2 and page 20 could be revised to make them consistent with the "Compilation" cited.

We appreciate very much the opportunity to comment on the draft report.

P.B.M.: bann

Frilly b. Mutz Interstate Stream Engineer

cc: H. P. Dugan
J. R. Riter
J. R. Riter
Felix Sparks
William McDonald
Calvin Rampton
Dan Lawrence
Floyd Bishop
George Christopulos
Paul Billhymer

Nesponse to letter from New Mexico Interstate Stream Commission, dated August 28, 1981.

The extension of the fall space building period by 2 months and limitation on the magnitude of space building releases to a non-damaging rate (28,000 cubic feet per second) were logical and reasonable modifications to the 1968 flood control operating blan in light of current development within the flood plain. Further, the extension of the space building back to August 1 does not place any additional risk with respect to water supply upon the Upper Basin, for the following reasons. First, the required flood control lastorics space on August 1, (1,500,000 acre-feet) and January 1 (5,550,000 acre-feet) are the same as the 1968 flood control plan. Second, the active storinge space in Moover Dam (27,377,000 acre-feet) in Lake Powell (25,002,000 acre-feet). The significance of this fact is that in a year in which Magnst i wailable storage space is the minimum of 1,500,000 acre-feet (all of which is in Lake Head), space building requirements for August and September can be almost completely satisfied by releases from Hoover Dam. The October I available flood control space requirement of 3,040,000 acre-feet and the September 30 Section 602(a) active storage split could be met with the following possible reservoir system status.

Reservoir	Storage Content (acre-feet)	Available Storage Space (acre-feet)
Hoover	24,670,000	2,708,000
Powe11	24,670,000	333,000
Flaming Gorge	Full	0
Fontenelle	Full	0
Blue Mesa	Full	0
Nava jo	Full	0

Any available storage space in reservoirs upstream from Lake Powell is directly creditable against the 333,000 acre-feet shown in the table. Normally there would be far more available storage space than 333,000 acre-feet in Lake Powell, plus the upstream reservoirs by October 1 in order to bagin building space for the next runoff season.

Under the authorizing legislation (Boulder Canyon Project Act), flood control and river regulation have first priority in terms of establishing the operation of Mover Dan. Macter supply and power are second and third priority, respectively. The stepped releases called for by alternative | are flood control releases, which happen to be beneficial for both power production and consumptive use of water. Additionally, flood releases are made only in response to a forecast of inflow, which is updated monthly that indicates the release is necessary.

2. Table 2 of the main body of the report has been updated and revised.

Gordon E. Nemetor
Ensure Director
DIVISIO

Scott M. Matheson Governor

VISION OF WATER RESOURCES

BOARD OF WATER RESOURCES

Philip S. Knight

Provo (Provo) Bill M. Gibson Vise-Chairman Vernal

John P. Holmgren Beer Ares City (Beer) Edward H. Southwick

Richard H. Moffat San Late City (Sat Late)

Quin T. Shepherd Delta (Sevier) Clyde E. Conover

Clyde E. Conover Ferran Iupper Coronato) Roy P. Urie Oster Civ

Lt. Col. Roger C. Higbee, Acting District Engineer Department of the Army
Los Angeles District, Corps of Engineers
Post Office Box 2711
Los Angeles, CA 90053

Dear Colonel Higbee:

We have examined the February 1981 "Colorado River Basin-Hoover Dam-Draft Review of Flood Control Regulation", and do not feel we can support the recommended plan. Our principal objections lie not so much with the analytical procedures used as with the basic assumptions.

Water conservation and flood control were the principal purposes for which Hoover Dam was constructed, and the use of water for generation of hydroelectric power was clearly made subscribent (See Article IV (b) of the Colicado River Compact and Section 6 of the Boulder Canyon Project Act). Although the basis for the recommended plan in the draft review is ostensibly flood control, it is apparent that the release steps and timing are chosen with power plant capacities in mind.

Section 602 (a) of Public Law 90-537 is, of course, the factor which makes releases at Hoover Dam important to the Upper Basin States. When storage in Lake Dowell is greater than storage in Lake Mead, releases from Lake Mead can trigger releases from Lake Powell. Under normal circumstances this would not be critical. It is conceivable, however, that a situation could arise in which an overestimate of flood control releases required at Hoover Dam would cause releases from Lake Powell which, due to consecutive dry years, could not be recouped.

Under the recommended plan, flood control releases from Hoover Dam will be initiated earlier in the year than under the 1968 plan, thus increasing the chances of excessive releases. The report gives as reasons for the proposed changes in operation increased power generation and less likelihood of damages to structures which have encroached on the flood plain.

Lt. Col. Higbee Page 2 September 3. 1981 We feel that both of these reasons are legitimate and desirable for Lower Basin interests, but can be supported by Utah only if the Upper Basin water supply is guaranteed to be unaffected by the damage. If the Lower Basin wishes to protect residents illegally and inadvisable using the flood plain, and wishes to increase their revenues from hydroelectric power generation, they should be free to do so, but not at the expense of the Upper Basin.

Daniel F. Lawrence

Suite 900 291 East 400 South SALT LAKE CITY, UTAH 84111 Tel: (801) 593-5401

September 3, 1981

The major issue for Utah associated with the Corps of Engineers recommended flood control operation plan is no different than that discussed and debated at length over the past several years with the Bureau of Reclamation and Lower Basin interests when early releases from lake Mead were suggested. Utah's position was Commissioner Higgenson (copy attached), and this position is unchanged. We still feel that the concept of Upper Basin "credits" is eminently equitable and workable.

In closing, it is generally agreed by all parties that diversions for the Central Arizona Project, scheduled to begin in 1985, will greatly reduce the flood regulation problem, since water demands on Lake Mead storage will be significantly increased. It does not seem particularly compelling to us to attempt to permanently change the 1968 regulations to cope with this short-term situation, particularly when such action could be detrimental to Upper Basin interests, and when it has a legitimizing influence on admittedly illegal encroachment into the flood plain.

We appreciate the opportunity of commenting on this proposal.

Sincerely,

Amiel 7 cm.
Baniel F. Lawrence



SCOTT N. MATHERON

STATE OF UTAH

BALT LANE CITY

January 20, 1981

Mr. R. Keith Higginson, Commissioner Water and Power Resources Service Department of the Interior Washington, D.C. 20240

Dear Commissioner Higginson:

Because the filling of Lake Powell has given the appearance of water sufficiency in the Colorado River Basin, there have been strong attencts in recent months to allow Lower Basin reservoirs to be operated in such a manner as to maximize power generation while simultaneously eliminating possible damage to developments which have encroached on the floor piain along the Lower Colorado River. These attempts have culminated in a new reservoir operation plan described in a December 11, 1980 latter from Eugene Fines, Director of the Lower Colorado Region, Water and Power Region, Birector of the Lower Colorado Region, Wegas, you agreed that comments on this plan, if submitted prior to January 31, would be considered before finalization. We most definitely do want to comment on the proposes plan.

We believe the plan processed by Mr. Hincs is seriously flawed in terms of both law and equity. The legal basis for the releases is purported to be flood control, and the flood control regulations under which Hoover Dam has been operated for 25 years are claimed to be now supplanted by a document titled "Field Working Agreement between Department of Interior, Water and Power Resources Service, Department of the Army, Corps of Engineers, regarding flood control operation of Hoover Dam and Lake Head, Colorado River, Nevada-Arizona." A field working agreement does not appear to be a very solid legal foundation where there is concerted opposition from more than half the parties involved.

Fulls, even a cutsopy events on the fittic borring Agreement from the effective release rates are to large past on power 15th copie! For and on avoiding darvie to developers along the five: which, Eccause of a lack of State lands, and feature controls have been allowed to encroach on the flood plain. Neither of these factors would seem to meet the requirements for releases under Article III (e) of the Colorado River Compact.

On an equity basis, the proposed plan of operation is even more of a failure. The storage equalization provisions of Section 602 (a), Public law 90-537, will result in the Upper Basin releasing from Lake Powell one-half of any shortage resulting from a miscalculation of eirly from these early releases, If the Upper Basin stood to profit in any way Upper Basin stand to gain nothing from early releases, this might not be unjust. But Utah and the stand only to lose.

We do, however, recognize the benefits of efficient power generation, particularly in these cays of fuel scarcity and high energy costs. Also, we would not want to stand in the way of attempts to minimize flood damages, no matter how strongly we question the advisability of these evelopments being when they are. For the upper reasons, we have supported the idea of storage credits for the upper least, whereby if early releases are made from Leve wed and if these releases do not result in a shortage requiring equalization, nothary suffers. If the water supply was over-estimated supplificantly, and early releases were made on a basis of these estimated supplificantly, and early might have to take a shortage. Since it is the Lower Basin alone that would profit from the early releases, this solution of storage credits appears eximately equitable. Mr. Hinds has recorrended eliminating this method of accounting, and we strongly oppose such an action.

In conclusion, we feel that Utah has diligantly and openly worked with the Mater and Power Resources Service and the other Colorado River Basin States to develop a plan of Coeration that would address the problems, but yet would be both legal and equitable. We feel that the plan proposed in the December 11 letter from Mr. Hinds meets neither of these requirements.

Sincerely

overno

Response to letter from State of Utah, Division o Water Resources, dated Santamber 2, 1981

The equalization of active storage between take Powell and Lake Head on September 30 of each year called for E: Section 602(a) of Public Law 90-537 in conjunction with the recommer led flood control operation plan impose no practical der ... to the water supply of upper Basin interests for the followin ... prist, the extension of the fall space building ... oy 2 months and limitation on the magnitude of space and reasonable modifications to the 1968 flood control perating plan in light of current development within the flood plain. Further, the extension of the space building back to August 1 does not place any additional risk with respect to water supply upon the Upper Basin for the following reasons. First, the required flood control plan. Second, the active storage space in Hower Dam (7737,000 acrefeet) as cloud control plan. Second, the active storage space in Hower Dam (7737,000 acrefeet) is that in a year in which August 1 wailable storage space is the minimum of 1,500,000 acrefeet (all of which is in Lake Mead), space building requirements for August 1 wailable storage space is the minimum of 1,500,000 acrefeet (all of which is the dead), space building requirements for August and September can be almost completely satisfied by releases from Hower Dam. The October 1 arabiable flood control space requirement of 3,000,000 acrefeet and the September 30 Section 602(a) active storage split could be met with the following possible reservoir system status.

Reservoir	Storage Content (acre-feet)	Available Storage Space (acre-feet)
Boover	24,670,000	2,708,000
Powe 11	24,670,000	333,000
Flaming Gorge	Full	0
Fontenelle	Pull	0
Blue Mesa	Full	0
Nava jo	Pull	0

Any available storage space in reservoirs upstream from Lake Powell is directly craditable against the 333,000 acre-feet shown in the table. Mormally there would be far more available storage space than 333,000 acre-feet in Lake Powell, plus the upstream reservoirs by October 1 in order to bagin building space for the next runoff season.

Of course, space building, following a single relatively dry year would be no problem in that the reservoir system would start out with more space than 1.5 million acre-feet on August 1 because of lack of enough runoff to fill all the reservoirs.

- 2. The stepped flood control releases called for by the selected operation plan are also beneficial to both consumptive use of water and power production. The flood control releases are made only in response to a monthly updated forecast of inflow which indicates that available storage space is not capable of containment. In addition, current Colorado River average annual runoff upstream from Lake Mead is approximately 15 MK versus 13 MAF of uses, yielding about 2 MAF of surplus annually. It appears prudent to place emphasis on maximum utilization of this surplus in generating pow damages.
- 3. Corps of Engineers' policy and regulations provide clear guidance with respect to development of water control plans. Corps' regulations state, "Indrough analysis and testing studies will be made as necessary to establish the optimum water control plans possible within the prevailing constraints. Necessary actions will be taken to keep approved water control plans purpose, plans will be subject to continuing and progressive study by personnel in field offices of the Corps of Engineers."

State Engineer's Office

BARRETT BUILDING

August 12, 1981 CHEYENN. WYOMING B2002

Los Angeles District, Corps of Engineers Los Angeles, California 90053 Lieutenant Colonel Department of the Army Roger C. Higbee P. O. Box 2711

Dear Colonel Highee:

- As requested in your letter of March 10, 1981, which accompanied the Pebruary 1981 Draft, Colorado River Basin, Hoover Dam, Review of Flood Control Regulation, we are submitting our comments with respect to the review. Alternative 2, which has been recommended for adoption, is described as a modified version of the 1968 operation plan with the major modifications being in the rate and duration of the space-building release. Lower release rates have been incorporated in the modified plan in order to protect developments which have encroached on the flood plan of the river below floover Dam. The new release rates based on power plant capacities and additional two month space-building release period also have the effect of increasing hydro-electric power production from the Lower Division's mainstem plants.
- to vacate flood control space at the lower rate of release, places the full risk of miscalculation upon the Upper Basin because of the provisions cause releases begin before accurate runoff forecasts can be made. Increasing power production by basing release rates on power plant capacities cannot be done at the expense of water conservation because, according to the "Law of the River", beneficial consumptive use of the water of the Colorado is the first priority of use while electric power production is The earlier and longer release period, which is necessary in order the lowest priority use.
- We are concerned that the proposal presented in the Draft Review was drafted with too much emphasis placed on maximization of power production at the expense of water conservation and could have a negative effect upon the water supply of the Upper Basin States. Thank you for the opportunity to express our concern with the proposal presented in the draft.

Seerge T. Child GEORGE L. CHRISTOPULOS

State Engineer

cc: See Attached Sheet

GLC/11w

August 12, 1961 Roger Higher Page 2

Paul Billhymer, Executive Director Upper Colorado River Commission 355 South Fourth East Street Salt Lake City, Utah 84111 :00

Santa Fe, New Mexico 87501 Bataan Memorial Bldg. Steve Reynolds State Engineer

800 Walker Bank Bldg. Salt Lake City, Utah 84111 Calvin L. Rampton

7900 West 23rd Avenue Lakewood, Colorado 80215 Felix Sparks

P. O. Box 53 Cheyenne, Wyomina 82001 Floyd A. Bishop

Big Piney, Wyoming 83113 P. O. Box 769 Dan Budd

G - 34

Response to letter from State of Myoming, State Engineer's Office, dated August 12, 1981.

. Alternative 1, which retains the same January flood control space requirement of 5.35 million acre-feet, was selected as a result of this study.

2. The extension of the fall space building period by 2 months and limitation on the amgnitude of space building releases to a non-damaging rate (28,000 cubic feet per second) were logical and reasonable modifications to the 1968 flood control operating plan in light of current development within the flood plain. Further, the extension of the space building back to August 1 does not place any additional risk with respect to water supply upon the Upper Basin for the following reasons. First, the required flood control storage space on August 1, (1,500,000 acre-feet) and January 1 (5,500,000 acre-feet) are the same as the 1968 flood control plan. Second, the active storage space in Hoover Dam (27,377,000 acre-feet) is that in a year in which August 1 available storage space in Lake Powell (25,002,000 acre-feet greater than the active storage space is the minimum of 1,500,000 acre-feet (all of which is in Lake Mead), space building requirements for August and September can be almost complately satisfied by releases from Hoover Dam. The October I available flood control space requirement of 3,040,000 acre-feet and the September 30 Section 602(a) active storage split could be met with the following possible reservoir system status.

Reservoir	Storage Content (acre-feet)	Available Storage Space (acre-feet)
Bover	24,670,000	2,708,000
Powe 11	24,670,000	333,000
Flaming Gorge	Full	.
Fontenette	101	0
Nava jo	Pu 11	0

Any available storage space in reservoirs upstream from Lake Powell is directly creditable against the 333,000 acre-feet shown in the table. Mormally there would be far more available storage space than 333,000 acre-feet in Lake Powell, plus the upstream reservoirs season.

3. Under the authorizing legislation (Boulder Canyon Project Act), flood control and river regulation have first priority in terms of establishing the operation of bloover Dam. Water supply and power are second and thing priority, respectively. The stepped releases called for by alternative I are flood control releases, which happen to be beneficial for both power production and consumptive use of water.

Additionally, flood releases are made only in response to a forecast of inflow, which is updated monthly that indicates the release is

The selected flood control plan for Hoover Dam does not impact the selected flood control atversely on the mater supply of the Upper Basin. The flood control atversely on the mater supply of the Upper Basin. The flood control in prescribes the orderly and controlled release of floodwaters ring situations in which the Colorado River reservoir system is facing inflows beyond its capacity to store. The selected plan feating only 282,000 acre-feet of inviolate controlled flood control storage in a reservoir system with a total capacity in excess of 57 million acre-feet.

÷

ELLIS & BAKER, P.C.
ATTORNETS AT LAW
SUTE 720
2848 EAST CAMESACE ROAD
PRODRIE ATTORN 8016
(602) 986-8878

R J SELM MULLAM B BAKUN MOMENT & POSTEN MOMENT & POSTEN MCOTT K MINGALEY PAIL R GROWE

May 29, 1981

Lt. Col. Roger C. Higbee, CE Acting District Engineer Los Angeles District, Corps of Engineers P.O. Box 2711 Los Angeles, CA 90053

.. ..

Draft EIS on Flood Control Regulation at Hoover Dam

NO RESPONSE REQUIRED.

Dear Colonel Higber:

We have reviewed the draft EIS on Boover Dam Flood Regulation and have no substantive comments to offer at this time. We note that the Arizona Water Commission, now the Department of Water Resources, has supported the proposal, alternative one, that is recommended in the draft EIS over the eight alternatives. We would appreciate receiving a copy of the final EIS.

Would you also have noted for your records that Mr. R. J. Ellis and Mr. William D. Baker, both on your mailing list for distribution of the draft can be reached through the mail at our new offices indicated on the letterhead.

Sincerely

ELLIS & BAKER, P.C. Robert S. Lyfich

RSL/bas

G - 36

4



E,

Department of Public Works

Public Services Building 401 South Fourth Street Las Vegas, Nevada 89101 (702) 386-4621

> GRANVILLE M. BOWMAN Director of Public Works

May 28, 1981

Lt. Colorel Roger C. Highee Acting District Engineer Department of the Army Los Angeles District, Corps of Engineers P.O. Box 2711
Los Angeles, CA 90053

SPLED - HE HOOVER DAM PLOOD CONTROL OPERATION PLAN

We have reviewed the Pebruary 1981 draft of the Colorado River Beain Boover Dam Peview of Flood Control Regulation report. We concur with your conclusion and recommend that Alternate I is the best flood control operation plan for Moover Dam.

It is suggested that whichever strategy is chosen, it will have to be revised in detail once the Cantral Arizana Project begins operation. Nest public concern we are familiar with seems to center around a desire to minimize daily water level fluctuations downstream of the Dam. Of course the Las Veças Valley area is most concerned about reliable, continuous electric power. The economy of this area is extremely dependent upon the tourist-gaming industry. Finally, changes in the decreased standard project flood conditions, especially in the Las Vegas Valley area, might be considered. From 1970 to 1980 the metropolitan population has grown from 226,000 to 470,000.

LT. COL. ROCER C. HIGHER

4

MOX 28, 1981

This has resulted in more paving for homes, businesses, roads, etc. which intern contributes more storm water ruroff to lake Mead.

We are pleased to have been invited to review the study

GRANVILLE M. BOMMAN DIRECTOR OF PUBLIC WORKS

m. Get nom.

DE DOMEIN, P.E. Chief Flood Control & Development Engineer

oc: G.M. Bowmen

Response to letter from Clark County, Nevada, Department of Public Morks, Las Vegas, Nevada, dated May 28, 1981.

 The selected flood control operation plan for Hoover Dam is adequate to hardle the increased runoff resulting from urbanization in the Las Vegas area.

Oppositional Condit Comments of Conditional Conditional Conditional Conditional Conditional Machine Medical Conditional Machine Machine Conditional Co

May 28, 1981

Lieutenant Colonel Roger C. Higbee Acting District Engineer
Department of the Army
Los Angeles District Corps of Engineers
P. O. Box 2711
Los Angeles, CA 90053

Dear Colonel Higber:

This will acknowledge receipt of your letter of March 10, 1981 transmitting a copy of the February 1981 draft, Colorado River Basin/ Hoover Dam, Review of Flood Control Regulation. We have reviewed the document and have no comments to offer.

We appreciate the opportunity to review the report and request that this office receive a copy of the report when it becomes final.

Donald L. Paff General Manager Sincerely,

DLP:)1

3700 WEST CHARLESTON BOULEVARD LAS VEGAS. NEVADA 89153 * (702) 870-2011

G-38

Department of Water and Power (the City of Los Angeles

TOM BRADLEY

CONTRIBUTION OF CITABLES PRESIDENT SORTES, CANADISA, Use President SARCE, OF VENDO. SARCE, CHARLES, RESIDENT C. VENDO. SERVICE SERVICES

LOTER WINNER Growes Manager and Clay Fequency WILLY LOSS Clay Express of Mark Early and Amenia Manage MATE LE MAT Clay Express and Amenian Manager SCHALLY TRATES Clay Features of Office?

June 1, 1981

Acting District Engineer
Department of the Army
Los Angeles District, Corps of Engineers
P.O. Box 2711 Los Angeles, California 90053

Dear Lieutenant Colonel Higbee:

In response to your letter dated March 10, 1981 my staff has reviewed the nine alternative flood control plans and agree with your selection of plan one as the recommended alternative.

- We support Metropolitan Water District's suggestion to improve the channel capacity below Hoover Dam to 35,000 cfs. This would provide more flexibility in the operation of Hoover Power Plant and increase the overall water and power benefits.
 - In addition, the assumed unit cost of energy used in your comparison of the nine alternatives appears to be much too low at 30 mills per kwh. Our estimates, which are based on the escalation of oil fuel prices between now and 1985, indicate that a range of 00 to 95 mills per kwh is more realistic.

We appreciate this opportunity to submit our

comments.

Sincerely

RAYMOND C. BURT Engineer in Charge of Operation and Maintenance

Water and Power Conservation, 2008 or 50

11) North Hope Street, Les Angeles, California C. Mosény address. Bas 111, Les Angeles 1906). Friephone. (213) 48) 421 (calé address. Stratolia.

Response to letter from the City of Los Angeles, Department of Water and Power, City of Los Angeles, dated June 1, 1981.

- We concur that a higher non-damaging channel capacity downstream from Hoover Dam would provide more flexibility in making releases for flood control and power production. The objective of this study deals with operating criteria at Hoover Dam rather than investigation of potential downstream improvements.
- The unit cost of energy of 30 mills per kwh used in the study reflects an estimate of the average replacement cost of energy throughout the Horver Dam service area. Actual replacement costs for energy any be higher or lower in different parts of service area depending on the alternative energy source, e.g., oil or cost generation, Colombia or Missouri intersystem transfers, et al. 'n

The Metropolitan Water District of Southern California

Office of the General Manager

June 24, 1981

Los Angeles, California 90053 Acting District Engineer Los Angeles District Corps of Engineers P.O. Box 2711

Dear Colonel Higher:

Hoover Dam Flood Control

Your letter of March 10, 1981, invited our comments on the draft report, "Colorado River Basin, Hover Dam, Review of Plood Control Regulation," dated February 1981. We apologize for having missed the June 1 deadline for submitting comments and appreciate the time extension given by a member of your staff.

the best flood control operation plan for the immediate future. We note that you intend to review the plan after the Central Arizona Project becomes fully operational. We would like to suggest that your future review include the ideas and comments expressed below in this letter.

As a general comment, the priorities in the Boulder Canyon Project Act give the flood control function preference over the water supply and power production functions. Bowever, it is recognized in the report (p. 51) that "Because Boover is multipurpose dam, water conservation, power production, recreation, and maintenance of the natural environment, as well as flood control, must be given adequate consideration in the development of a flood control operation plan."

We suggest that the studies for your scheduled review values of water and power as well as flood damages. In the studies for the draft report, the flood damages were extrapolated from 1979 to 1969 values based on estimated changes in development of the flood plain. For this same period, the water supply and power production benefits were held constant at \$30 per acre-foot and 30 mills per kilowatt-hour, respectively.

The average annual water supply and power production benefits for the Lower Basin are large, compared to the average annual flood damages. Annual water benefits amount to about \$290 million and power benefits to about \$180 million. Annual flood damages, on the other hand, are only about \$150,000.

The studies of the several alternatives show only small percentage variations in water and power benefits. Consequently, the differences in benefits between Alternative 1 and each of the other alternatives are small compared to the absolute values of the benefits. Because of this, comparisons of the benefits. Comparisons of the benefits. Comparisons of flood damages are not as sensitive to error since they exhibit relatively large variations compared to their smaller absolute values.

In the post-CAP era, there will be a greater variation in Lower Basin water demands between years of normal water supply. Metropolitan's use of Colorado River water could vary from its basic priority of 550,000 acre-feet per year (less California Indian water rights) to as much as the full capacity of its Colorado River Aqueduct-1.2 million acre-feet per year-in years when surplus water is available. This contrasts with our present annual use of about 800,000 acre-feet for both normal and surplus water supply conditions. This greater variation in water demand will affect the future regulation of Lake Mead reservoir.

Thank you for the opportunity to comment on your operating plan. If we can be of further help in explaining the ideas expressed in this letter, we would be pleased to do so.

Very truly yours,

Kellet Annager General Namager

CEH: CAS

Mr. Myron B. Bolburt, Chief Engineer Colorado River Board of California COT South Broadway, Rom 8103 Los Angeles, California 90012 ü

The second secon

OFFICE OF THE FLOODFLAIN APMINISTRATOR HOHAVE COUNTY 301 West Beale Street Kingman, AZ 86401

18 May 1981

District Engineer
Dept of the Army
Los Angeles District
Corps of Engineers
P.O. Box 2711
Los Angeles, Ca.

Re: Colorado River Basin Hoover Dam - Review of Flood Control Regulation - Draft February 1981

Dear Sir:

I have reviewed the draft report of the nine alternative flood control operation plans for the Colorado River Basin and concur with your findings, Plan One would be the most beneficial plan for the lower Colorado River Basin.

Tucker Sincerely,

the state of the s

Sau Bouardias County FLOOD: CONTROL DISTRICT 125 Eat Third Strat : San Bernarding, CA 82415 - (714) 383-1465

C. J. D. PIETRO, Flood Conwol Engines

COUNTY OF SAM BERNARDHE ENVIRONHENTAL NUBLIC WORKS AGENCY ABENCY Administrator

March 25, 1981

File: 6-600/1.00

Dept. of the Army Los Angeles District Corp of Engineers P. O. Box 2711

Los Angeles, CA 90053

Attention: Mr. Roger C. Higbee

Re: Zone 6, Colorado River, Hoover Dam Outflow

Gentlemen:

The District is in receipt your letter dated March 10, 1981 with regards to a draft report documenting the evaluation of 9 alternative flood control operation plans for Hoover Dam. As of this date, due to our present workload, we have been unable to complete review of referenced subject; you may expect our reply in approximately three weeks.

Should you have any further questions concerning this matter, please contact Mr. Allan J. Kielhold, Chief, Water Reosurces Division at (714) 383-2388.

Very truly yours.

C. J. DI PIETRO, Flood Control Engineer

By M.L. C. M.—.t. Ruben V. Mantes Asst. Flood Control Engineer Planning - Engineering

RVM:AJK:mjs

*

X

Southern California Edison Company

2244 WALNUT GROVE AVENUE ROSEMEAD CALIFORNIA B1770 008 XOR 0 4

June 2, 1981

1616 513 5181

L. D. MAMLIN WANADER OF FOWER CONVERCTS

Mr. Roger C. Higby, LTC CE Acting District Engineer U.S. Army Corps of Engineers Los Angeles District P.O. Box 2711 Los Angeles, CA 90053

Dear Mr. Higby:

Subject: Flood Control Regulation - Hoover Dam

Per your request, we have reviewed the draft report dated February, 1981, and respectfully offer the following comments.

Southern California Edison Company basically agrees with your recommended implementation of Alternate No. 1 as the best compromise among those studied. Hoover's suit-purpose nature dictates that, at a minimum, the preferred plan not erode the benefits currently available to all users of Lake Mead water and Boover power.

Although Alternates 2 and 9 provide for increased power generation potential, Edison recognises that the priority uses of Hoover for water conservation and flood control require a reasonable trade-off with potential economic benefits. Alternate 1, we believe, accomplishes this trade-off in a fair and equitable manner.

it was noted, however, that the summary (Page 52, Item H) states that upstream atorage could serve in lieu of Hoover's dedicated function for flood comtrol. Edison's concern is such continual use could concerably result in less water available for power generation (in later years) than Alternate i proposes. Verification of the intended implementation of Item H would be helpful.

TO THE PERSON OF

NO RESPONSE REQUIRED.

G-43

If you have any questions regarding these comments, please contact Julius L. Bognar, of my staff, at (213) 572-4381. The conctunity to comment on this report is appreciated.

sincerely,

L. D. Hamlin

Response to Southern California Edison Company letter dated June 2, 1981.

1. Item H was part of a summary of the major features of the selected flood control plan. Item H states "svellable storage space in Lake Powell and effective storage space in other upstream searchirs could be counted in lide of space in Lake Nead." The purpose of this feature is to account for smallable storage space in reservoir upstream from Nover Dam, thereby preventing the necessary release of mater storad in Brover Dam. The net result of including this feature is increased where supply and power production for the system with no detrimental impact on flood control objectives.

· ;

4


BUREAU OF RECLAMATION MAPS


BUREAU OF RECLAMATION MAPS


CONTENTS


423-300-1455 Lower Colorado River Flood Control Studies, Location Map.


423-300-1412 through 1434 (23 Sheets) Colorado River Flood Control Series, 1978, Colorado River, Davis Dam to International Boundary.

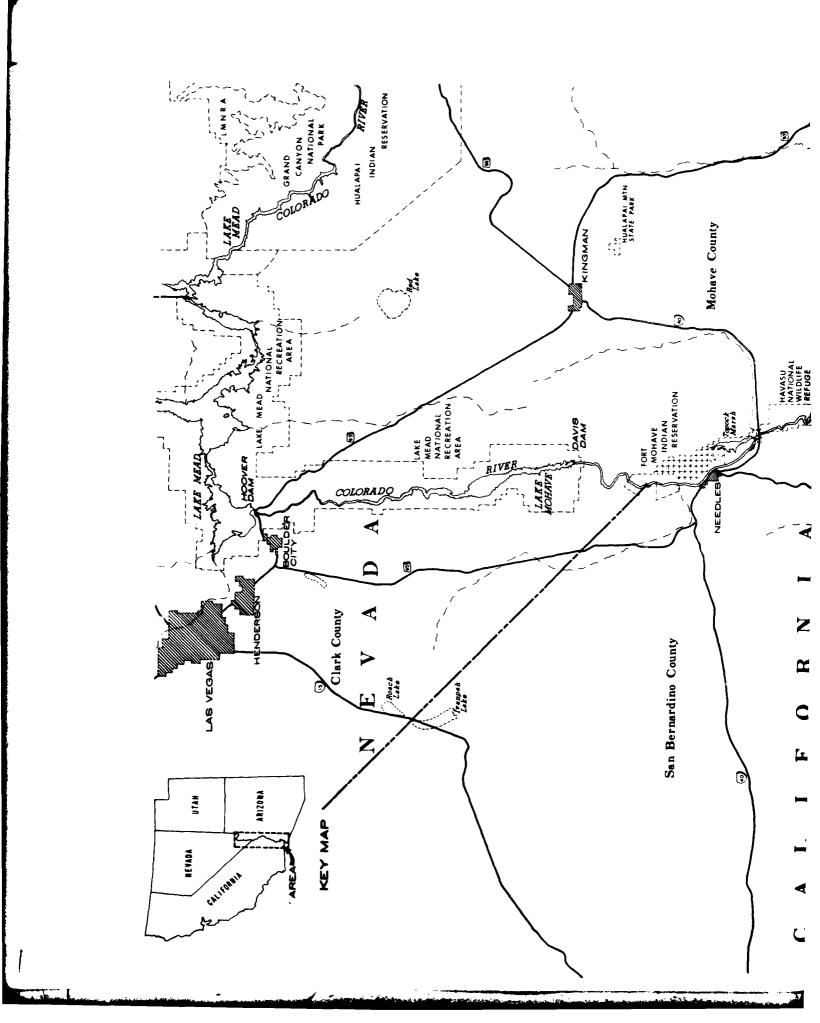


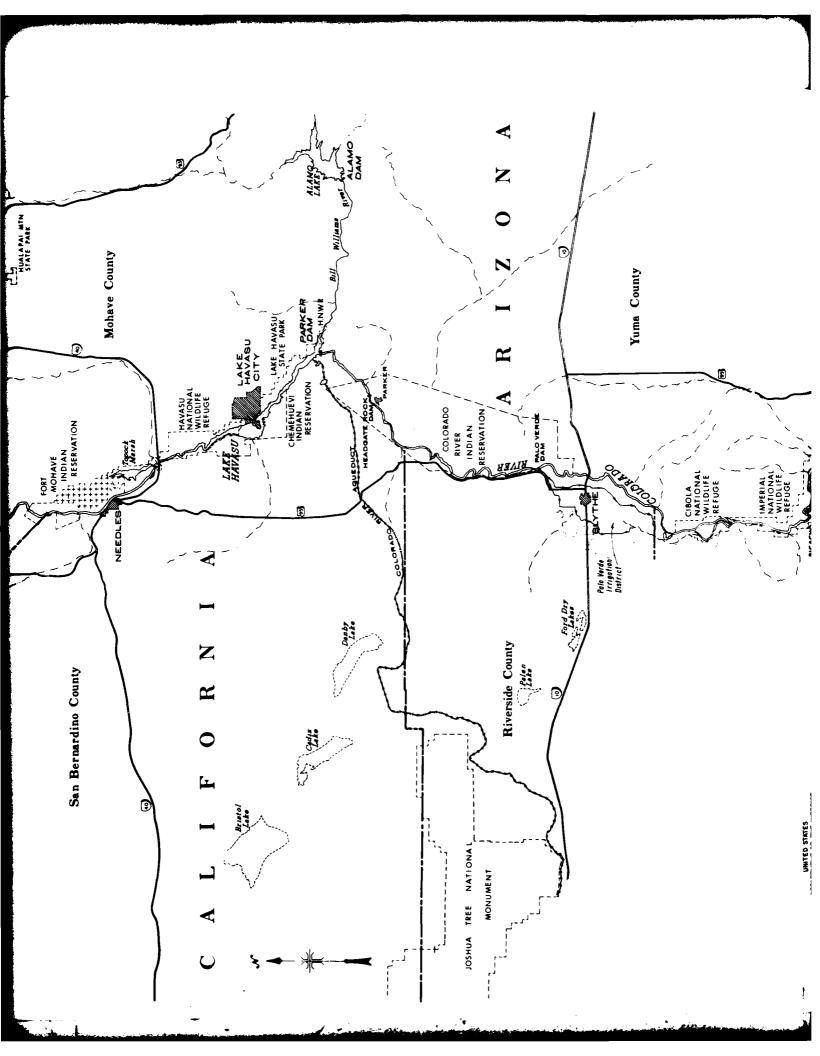


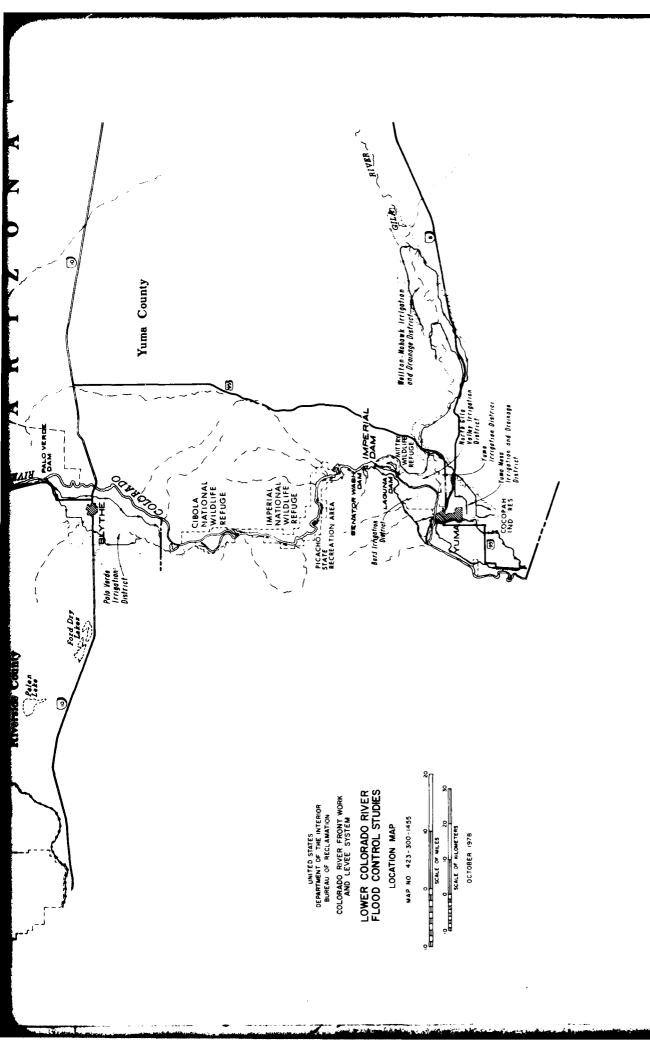


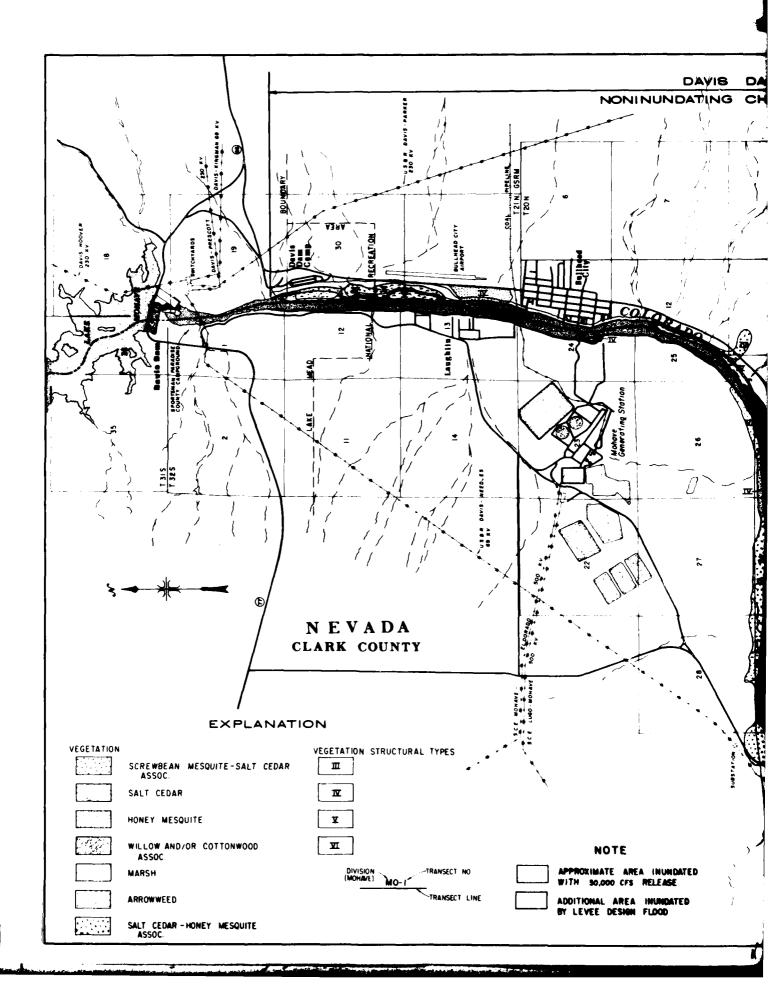


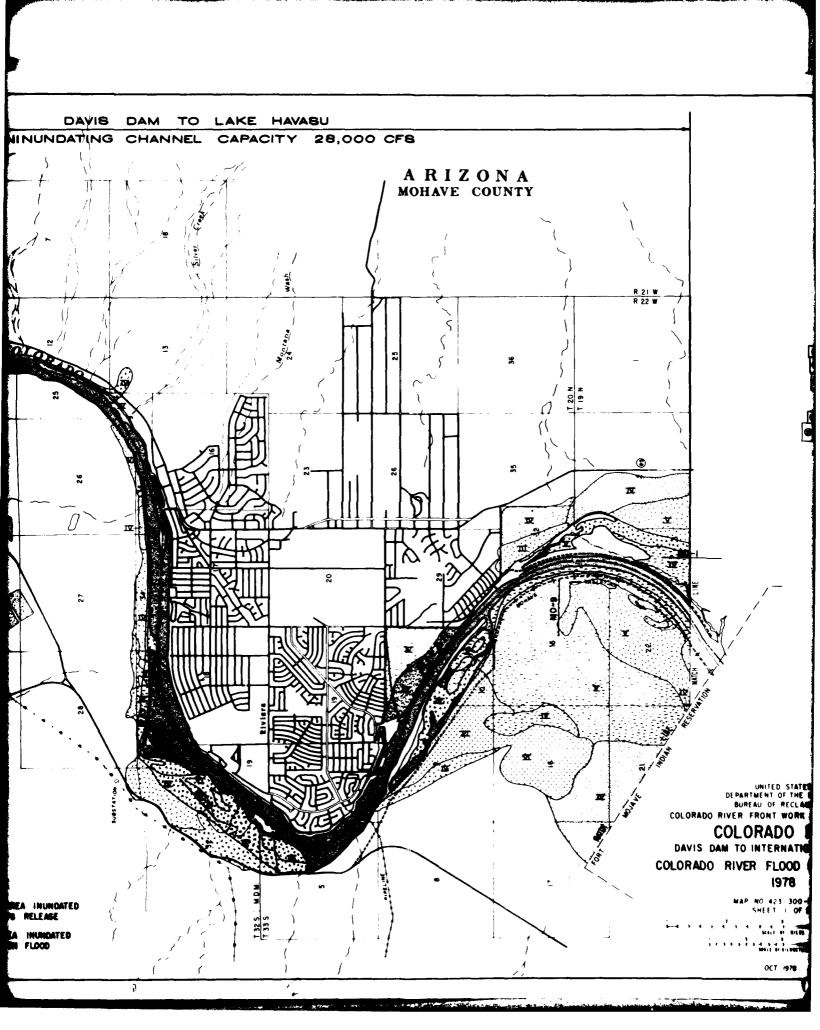


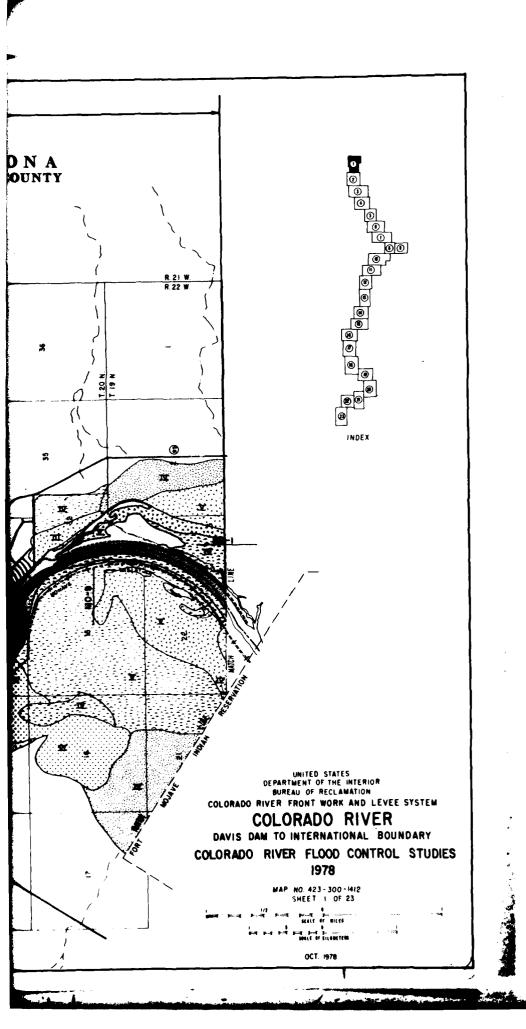


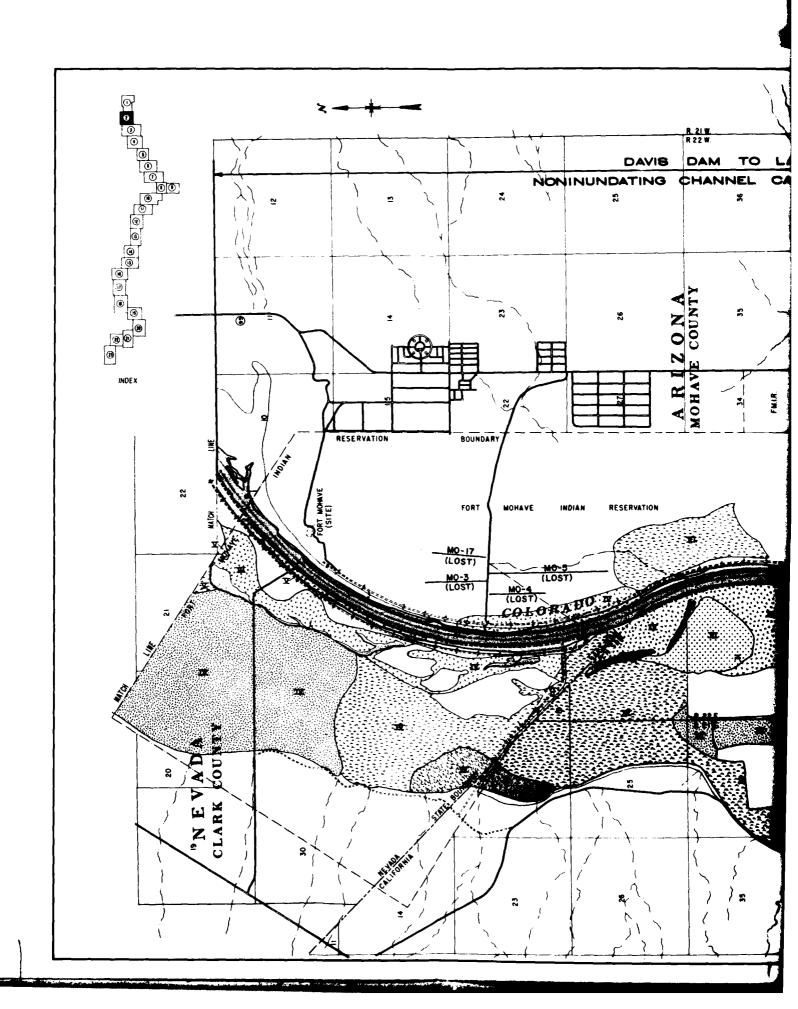


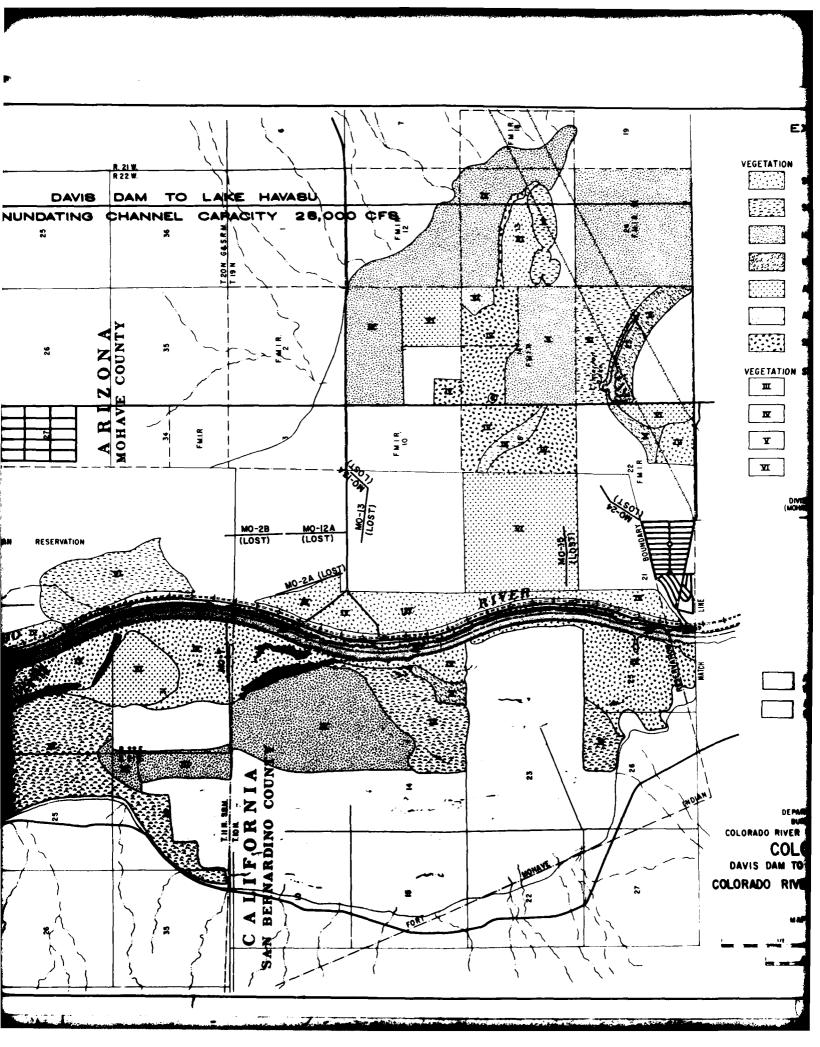


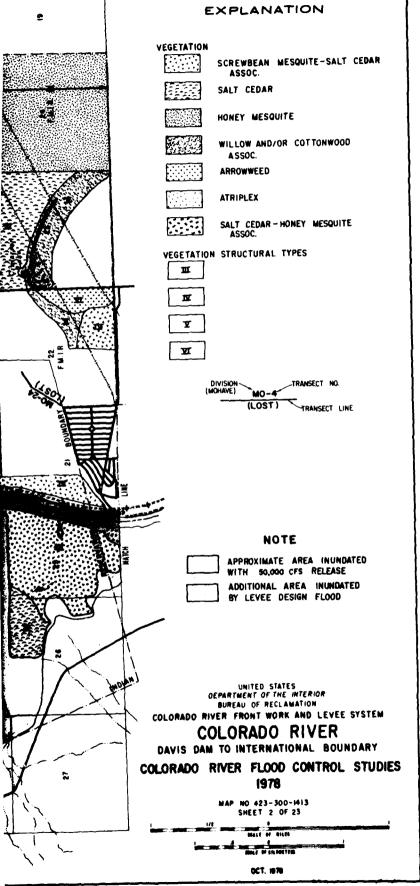


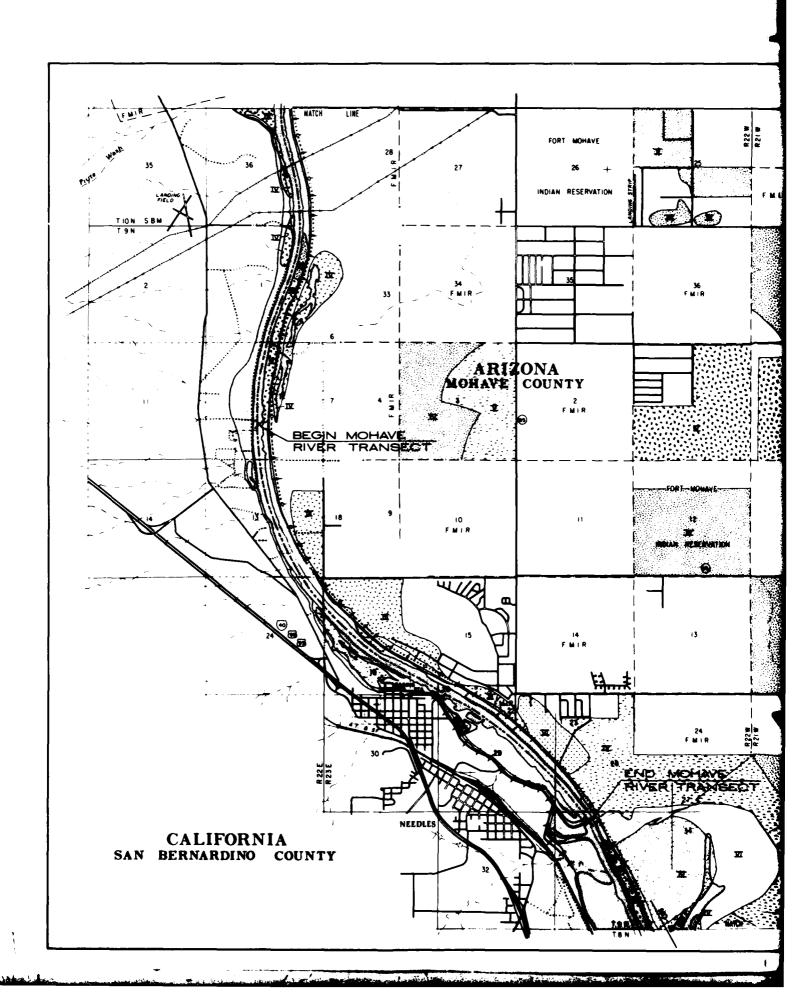


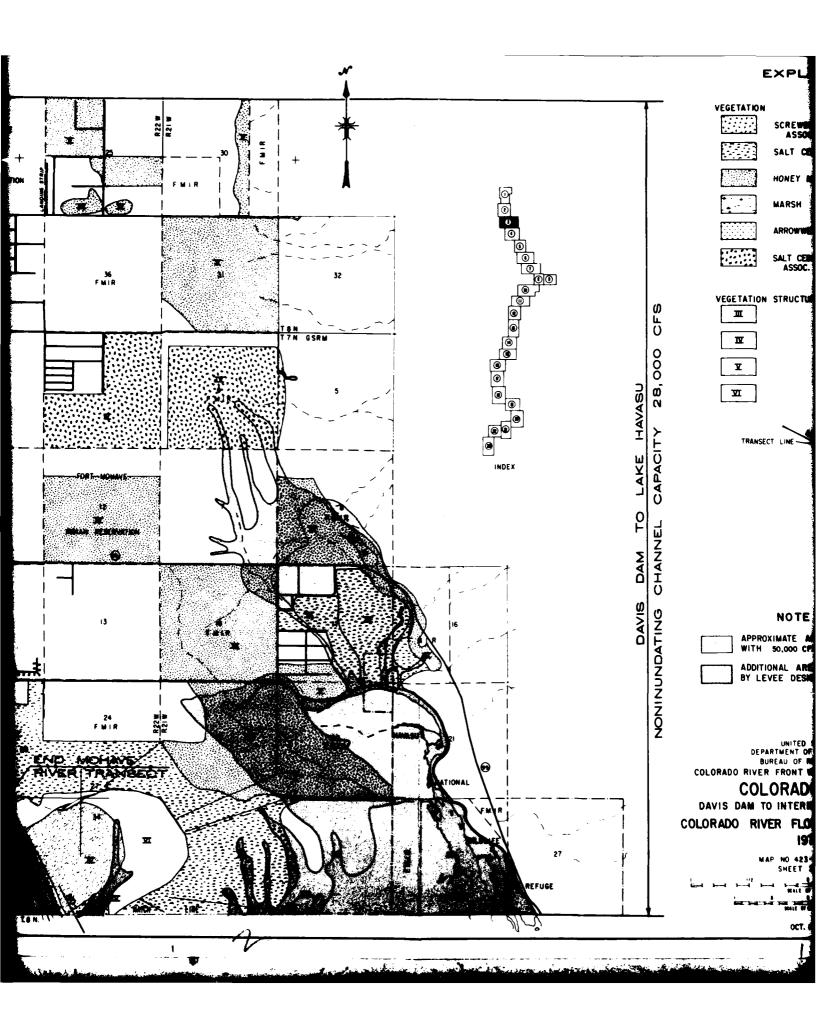


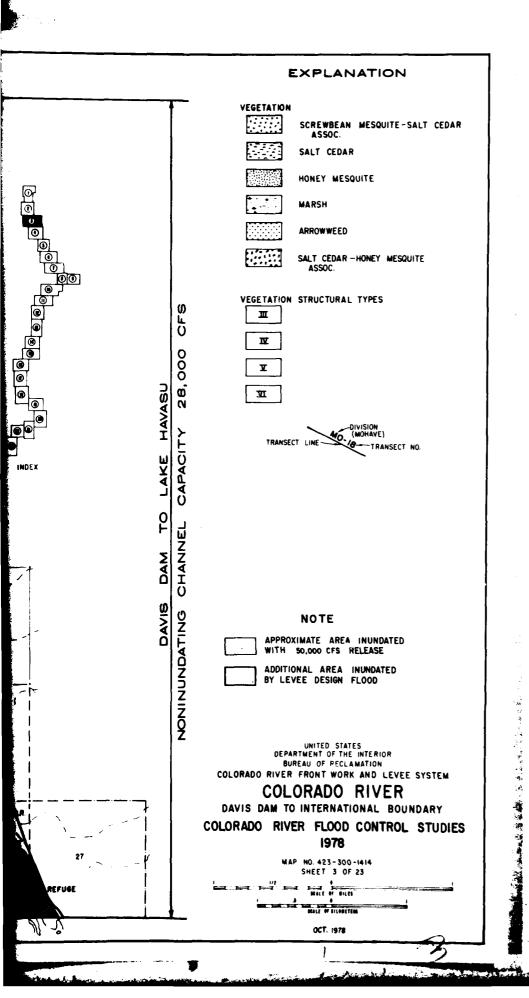


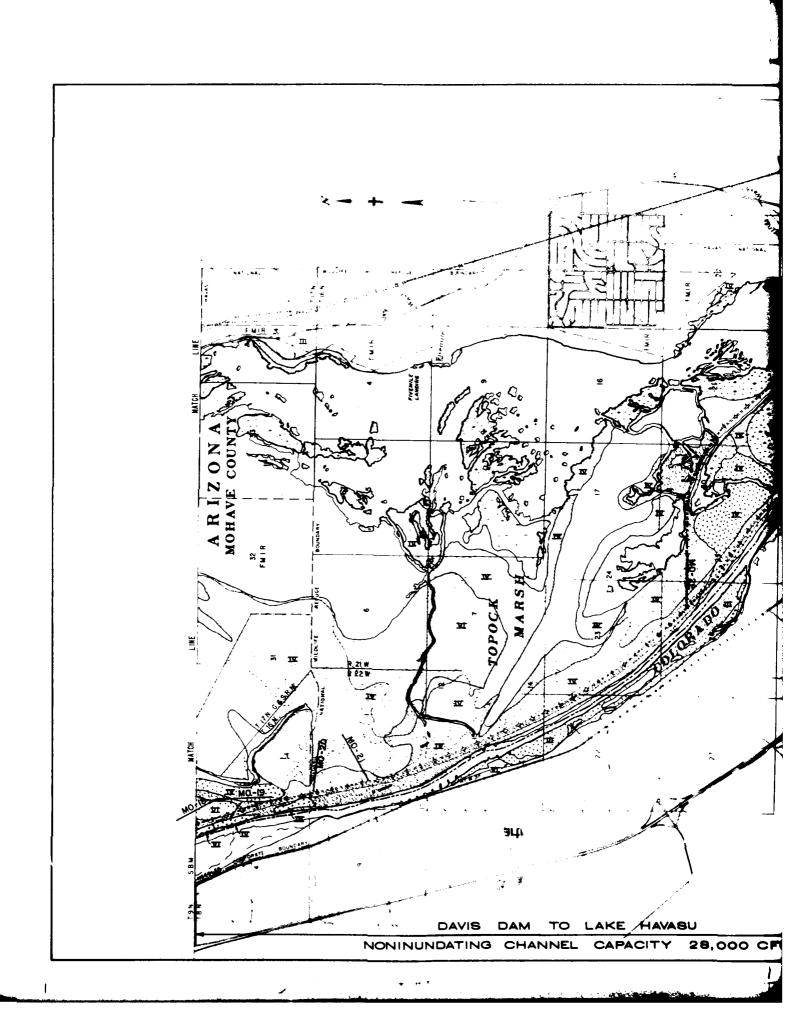


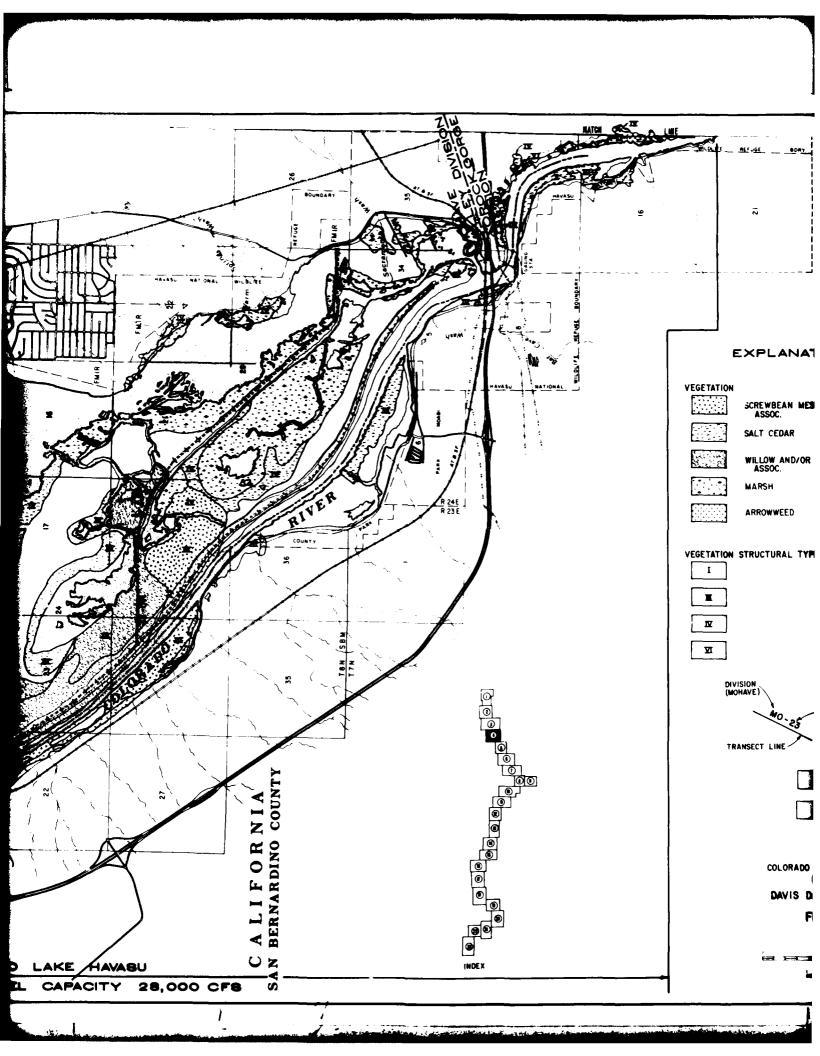

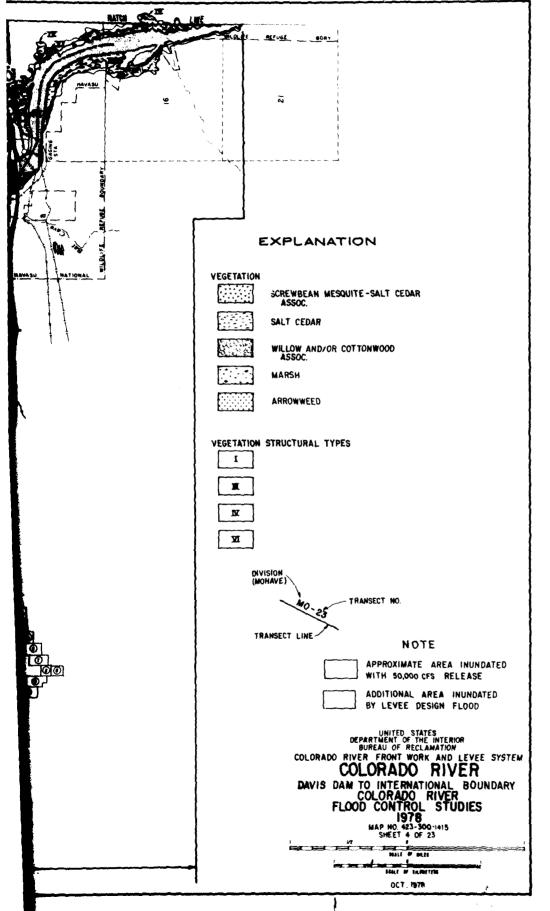

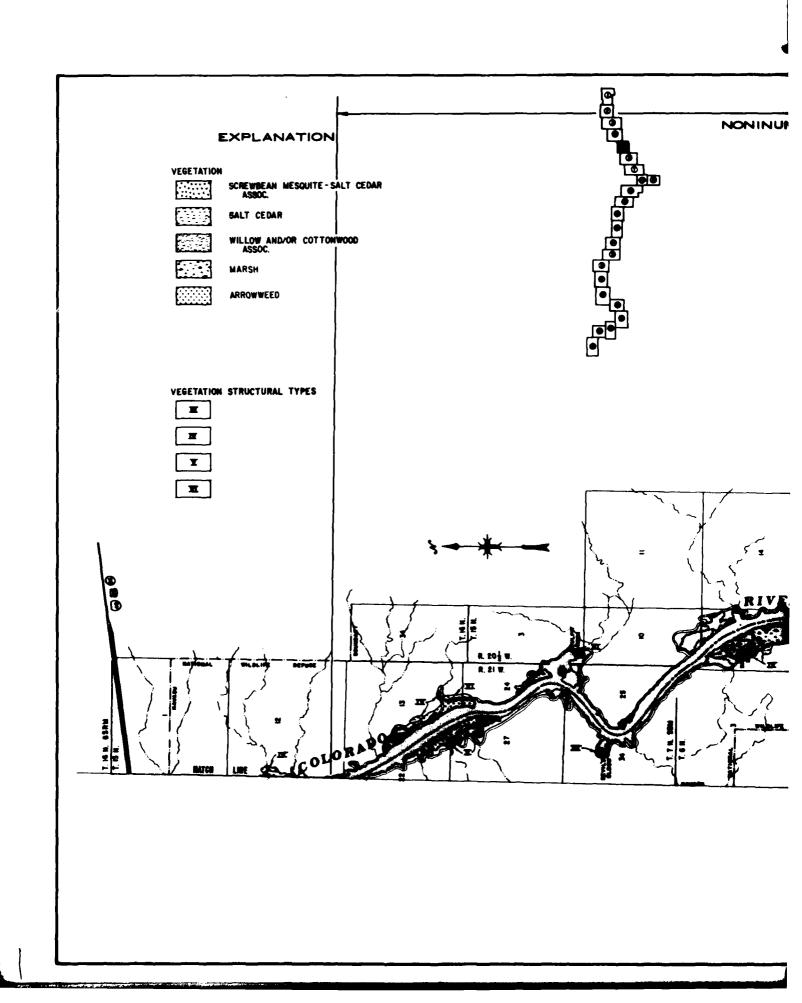

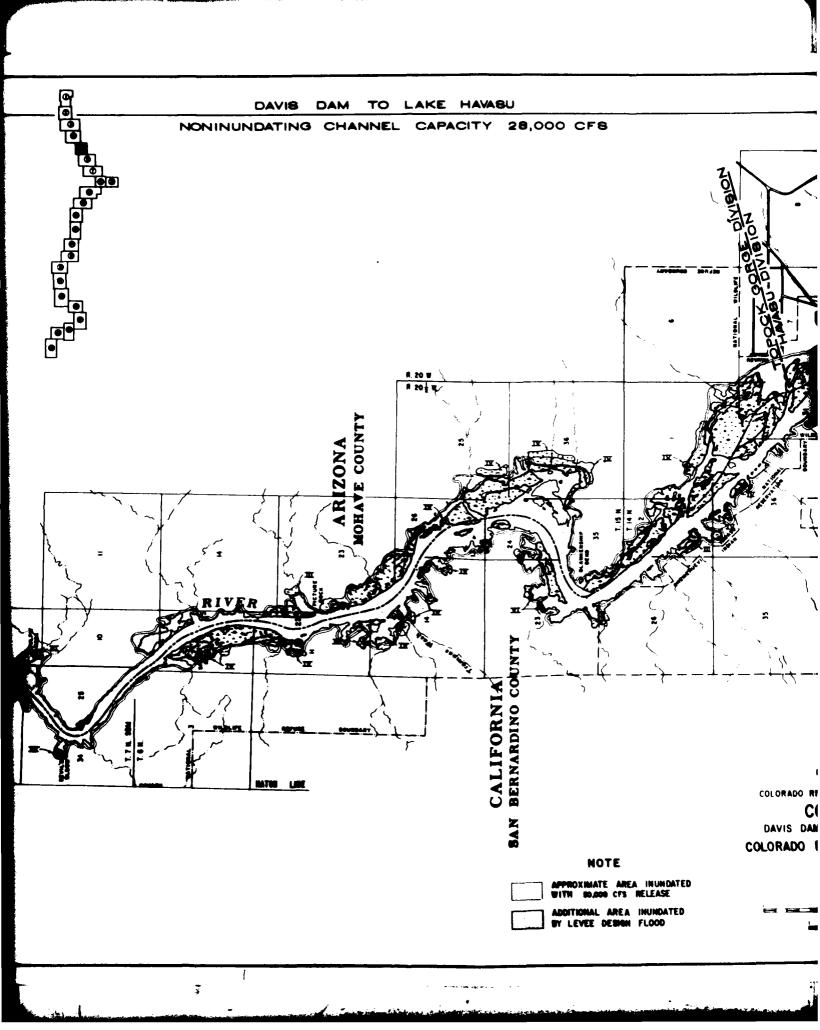

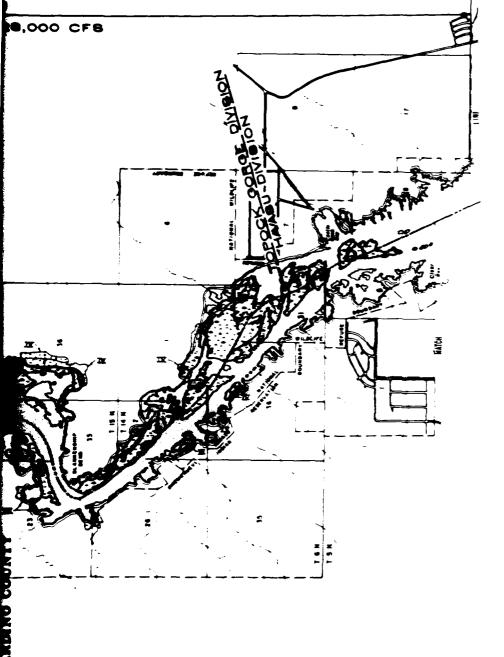

COLORADO RIVER FRONT WORK AND LEVEE SYSTEM

COLORADO RIVER

DAVIS DAM TO INTERNATIONAL BOUNDARY

COLORADO RIVER FLOOD CONTROL STUDIES

1978

MAP NO 423 - 300 - H16 SHEET 5 OF 23


MALE # 14.007***


OCT 1978


NOTE


APPROXIMATE AREA INUNDATED WITH 80,000 CFS RELEASE


AMOITIONAL AREA HILMDATED BY LEVEE BESIGN FLOOD

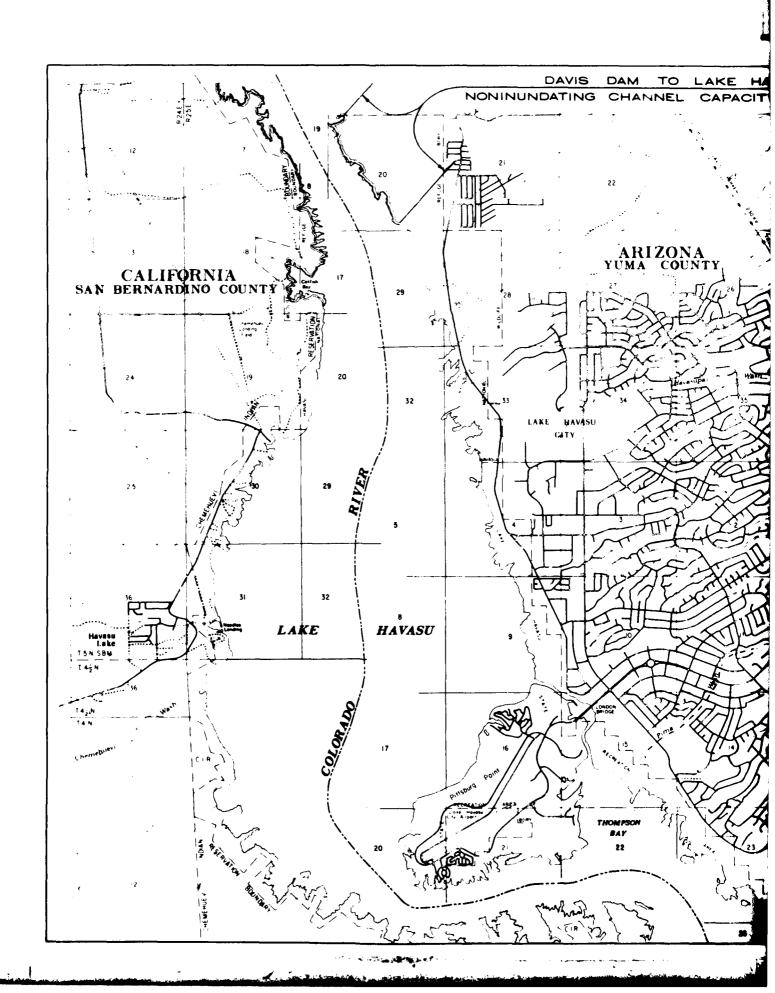


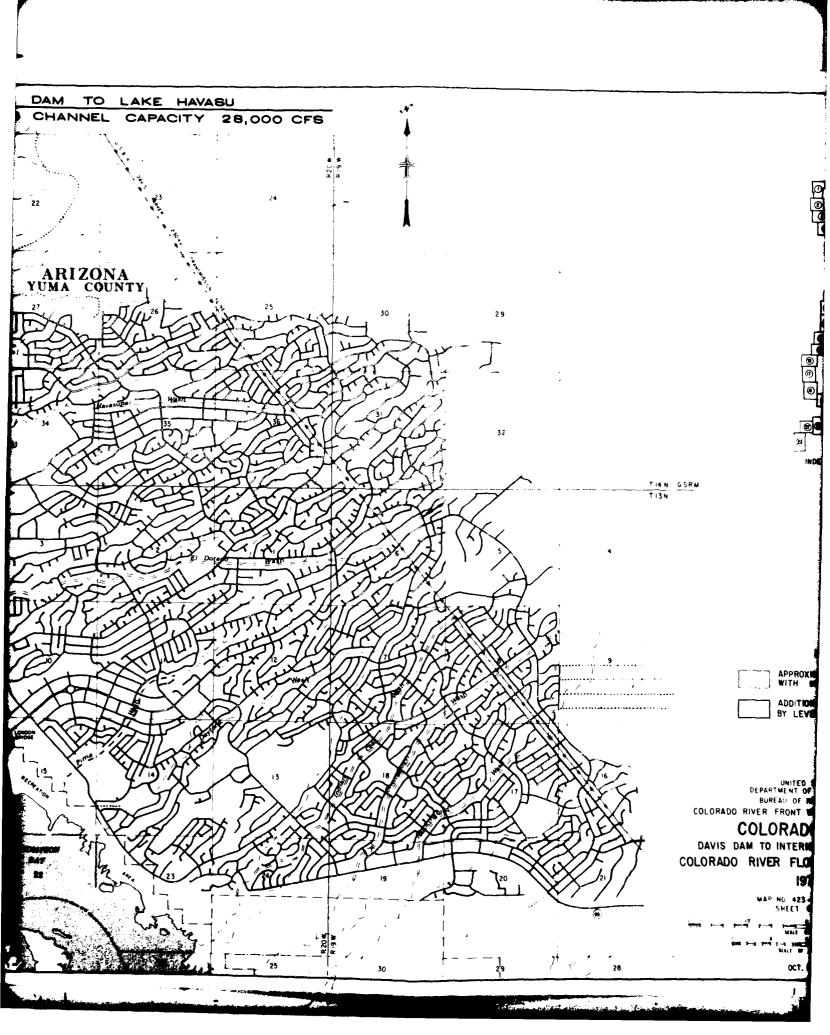


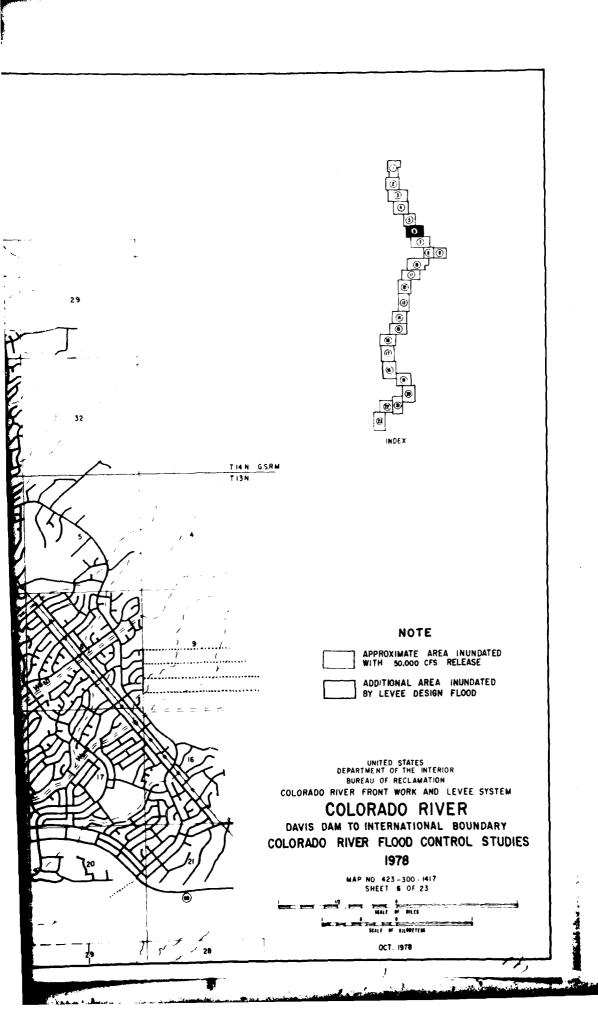


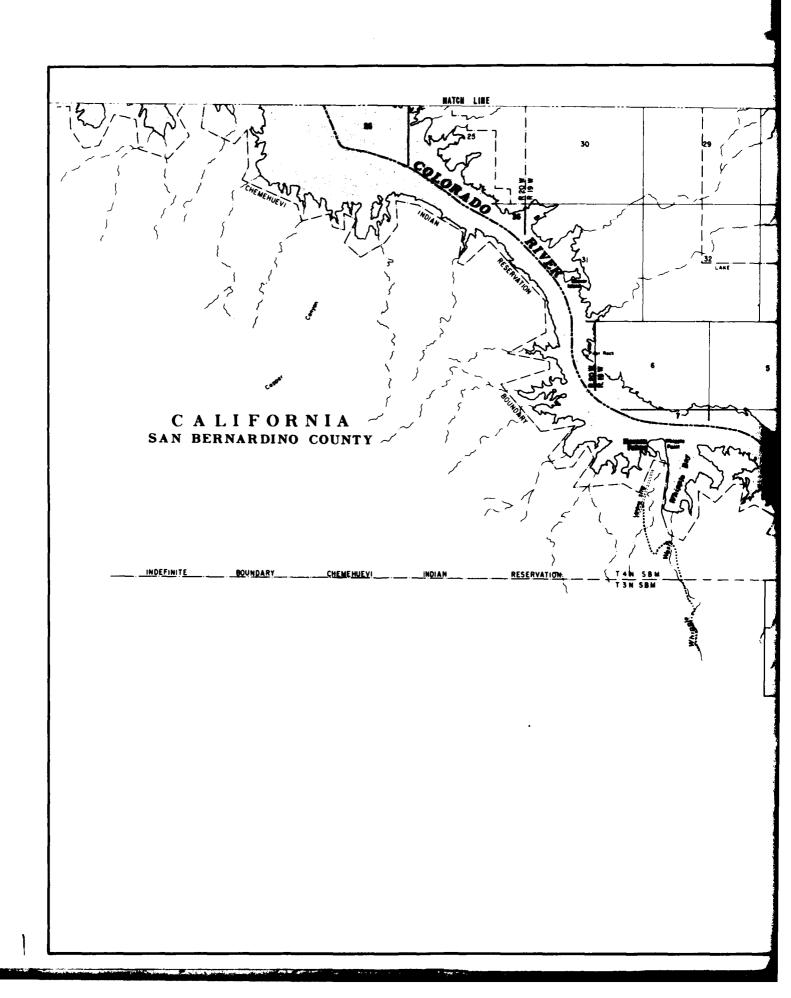


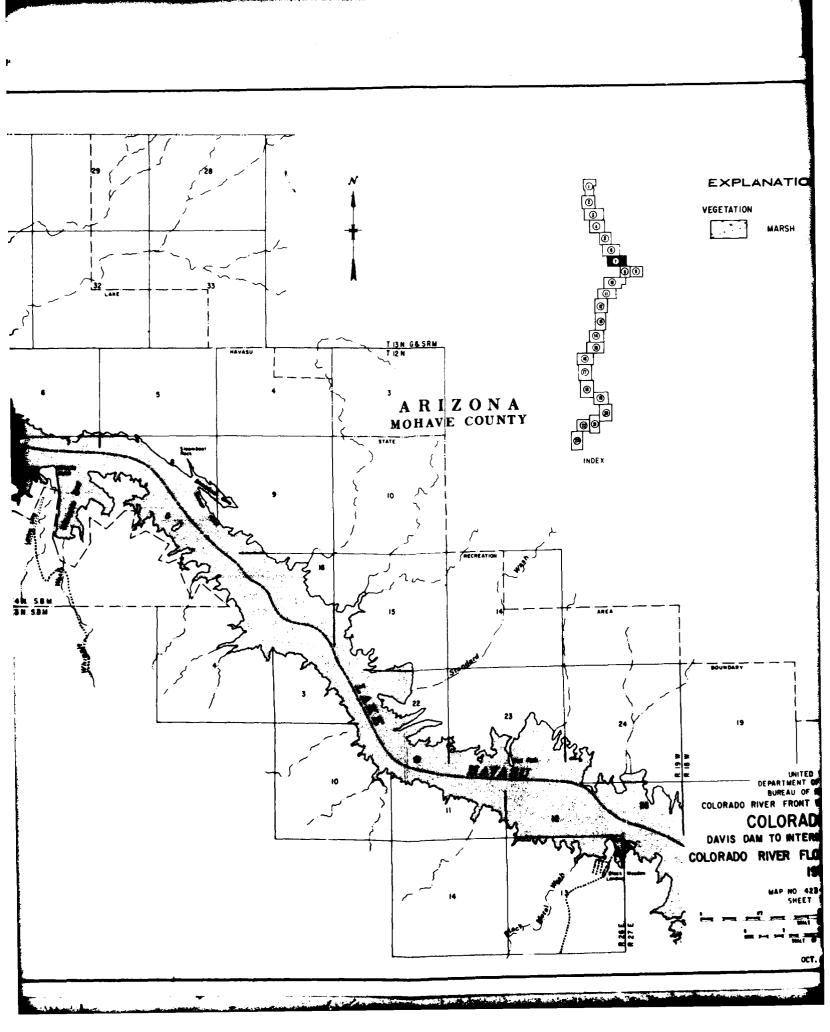


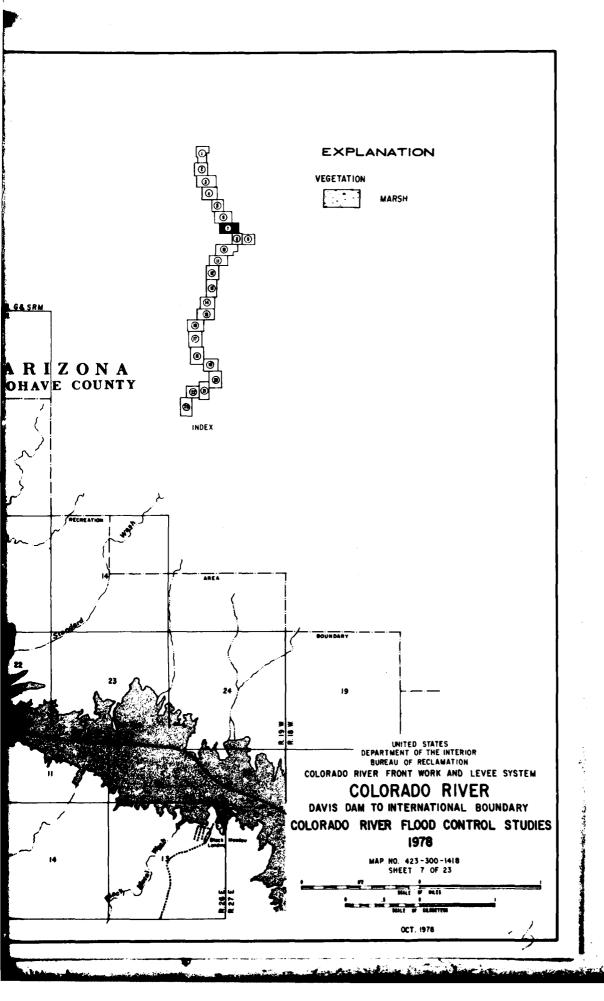

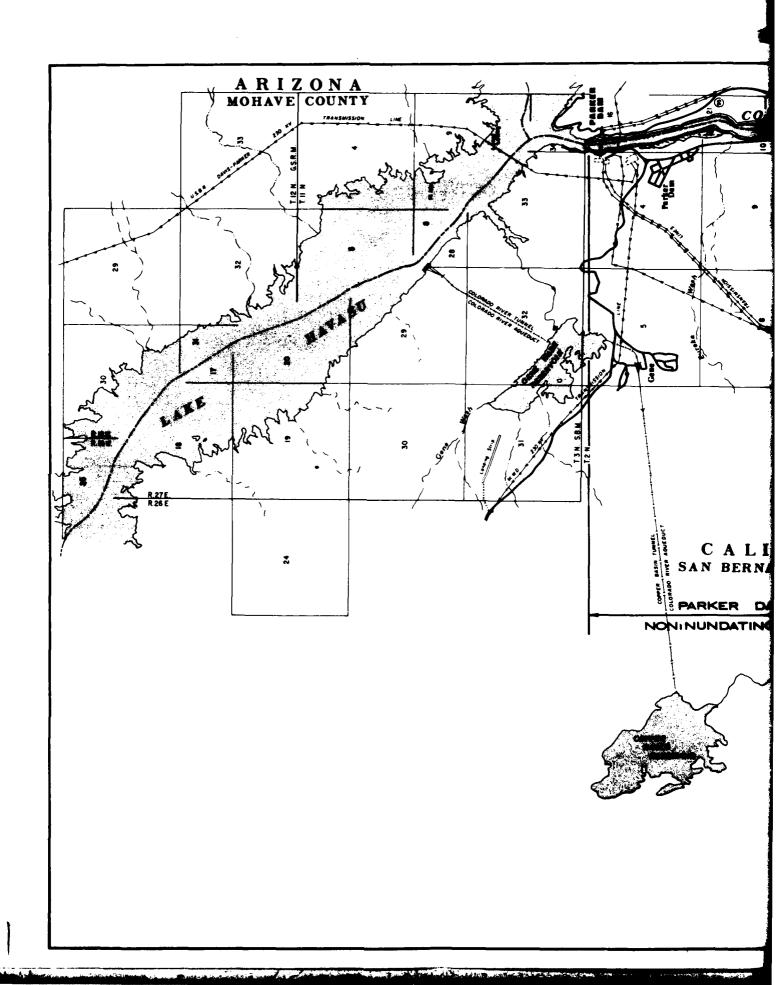

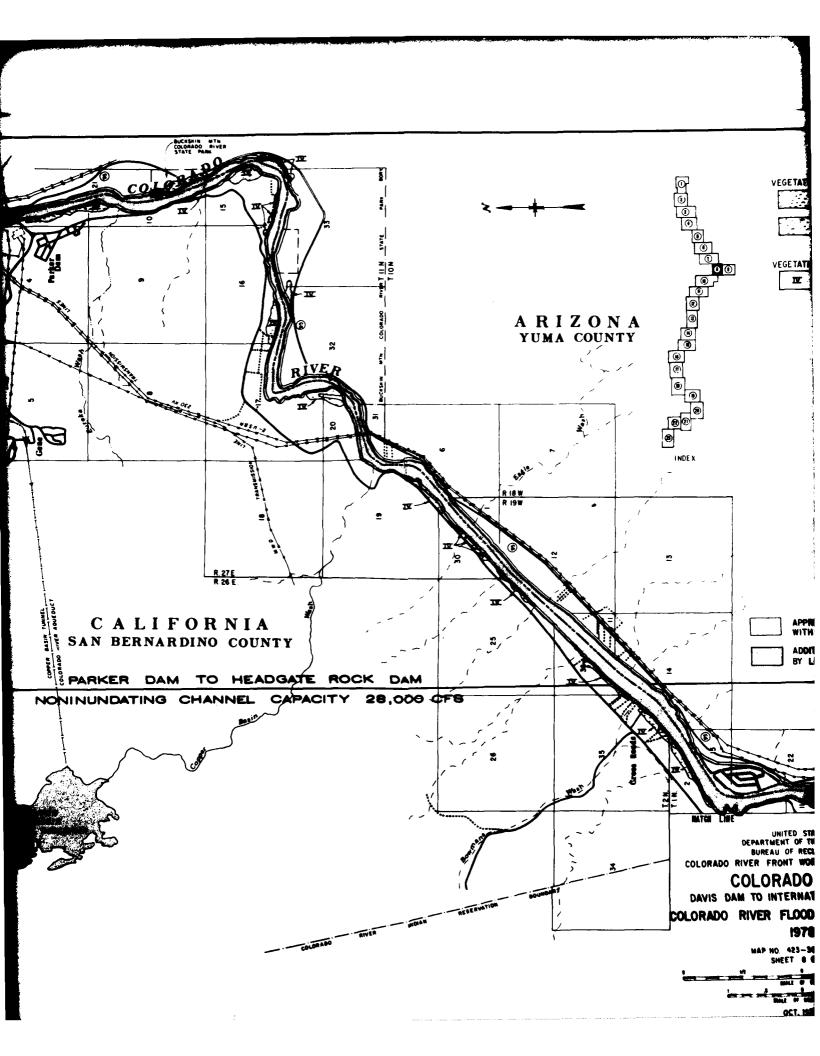

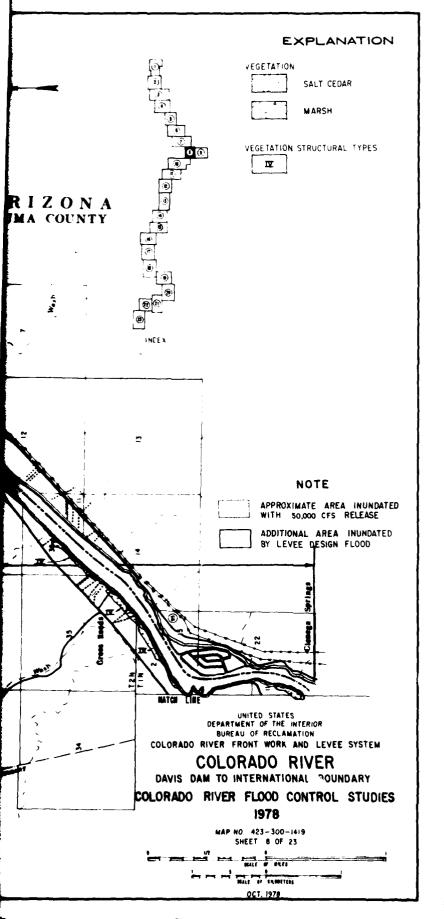

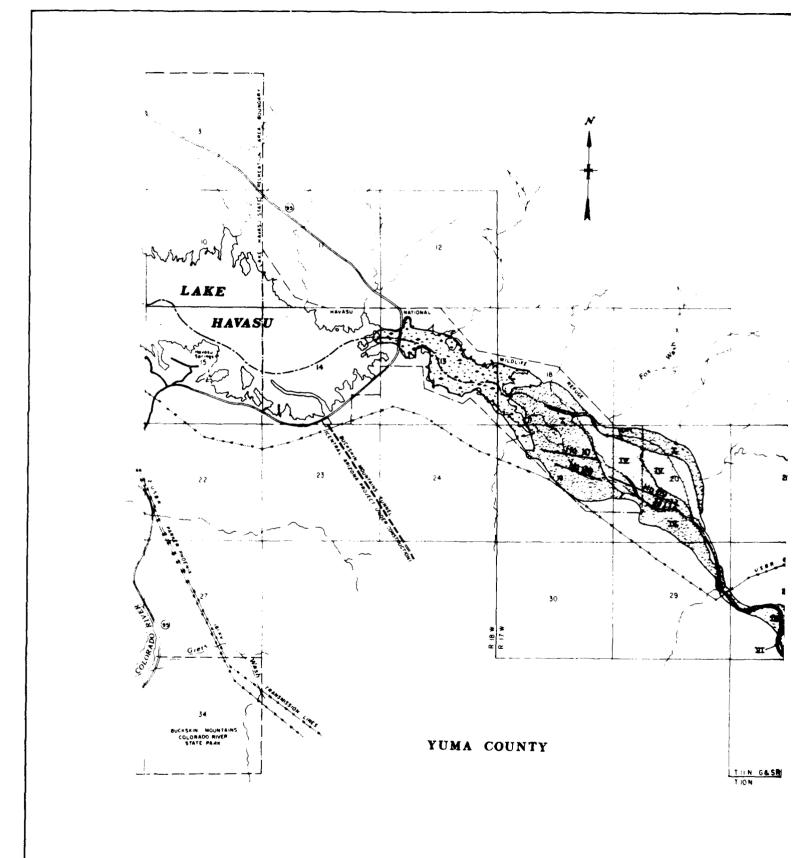

/EGETATION ARIZONA MOHAVE COUNTY INDEX Mine West 33

Ĭ.

EXPL#

WILLOW A

MARSH

SALT CED

VEGETATION STRUCTUR

UNITED DEPARTMENT OF BUREAU OF R COLORADO RIVER FRONT V


COLORAD DAVIS DAM TO INTERI COLORADO RIVER FLI

he H H H H

OCT. I

EXPLANATION

VEGETATION	WILLOW AND/OR COTTONWOOD - SALT ASSOC.
	MARSH
	SALT CEDAR
VEGETATION III	STRUCTURAL TYPES
x	
M	



COLORADO

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF RECLAMATION
COLORADO RIVER FRONT WORK AND LEVEE SYSTEM

COLORADO RIVER

DAVIS DAM TO INTERNATIONAL BOUNDARY COLORADO RIVER FLOOD CONTROL STUDIES

1978

MAP NO. 423-300-1420
SHEET 9 OF 23

WALL W BILLE

WALL W BILL

WHAT


WALL W BILL


WHAT


WALL W BILL


WHAT


OCT. 1978

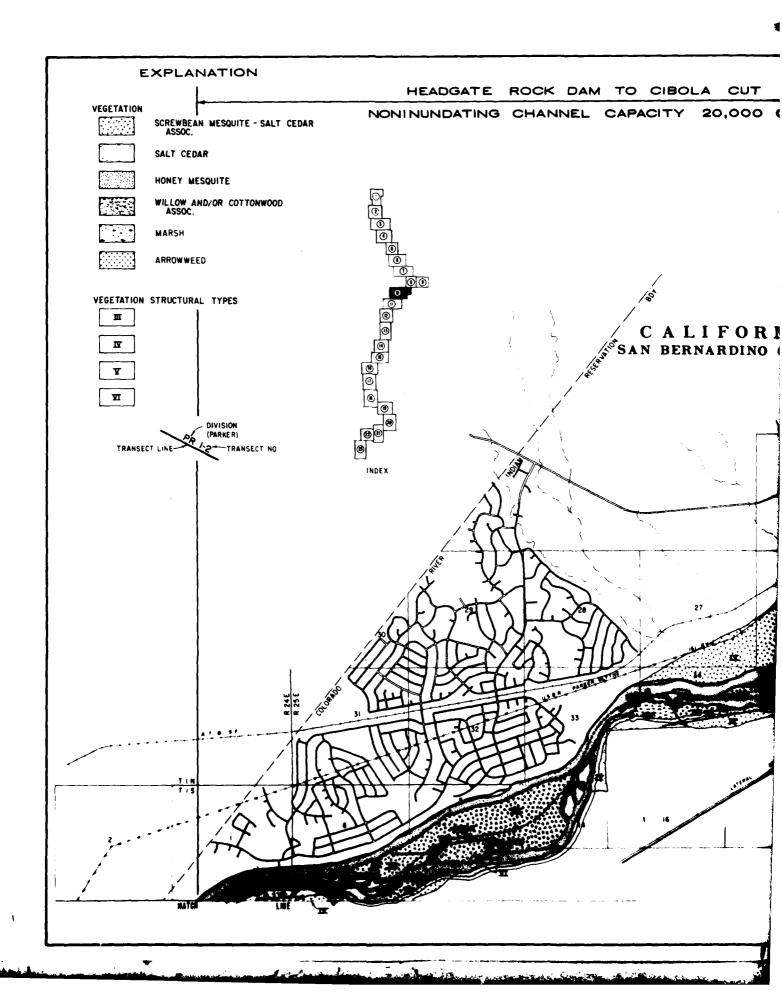


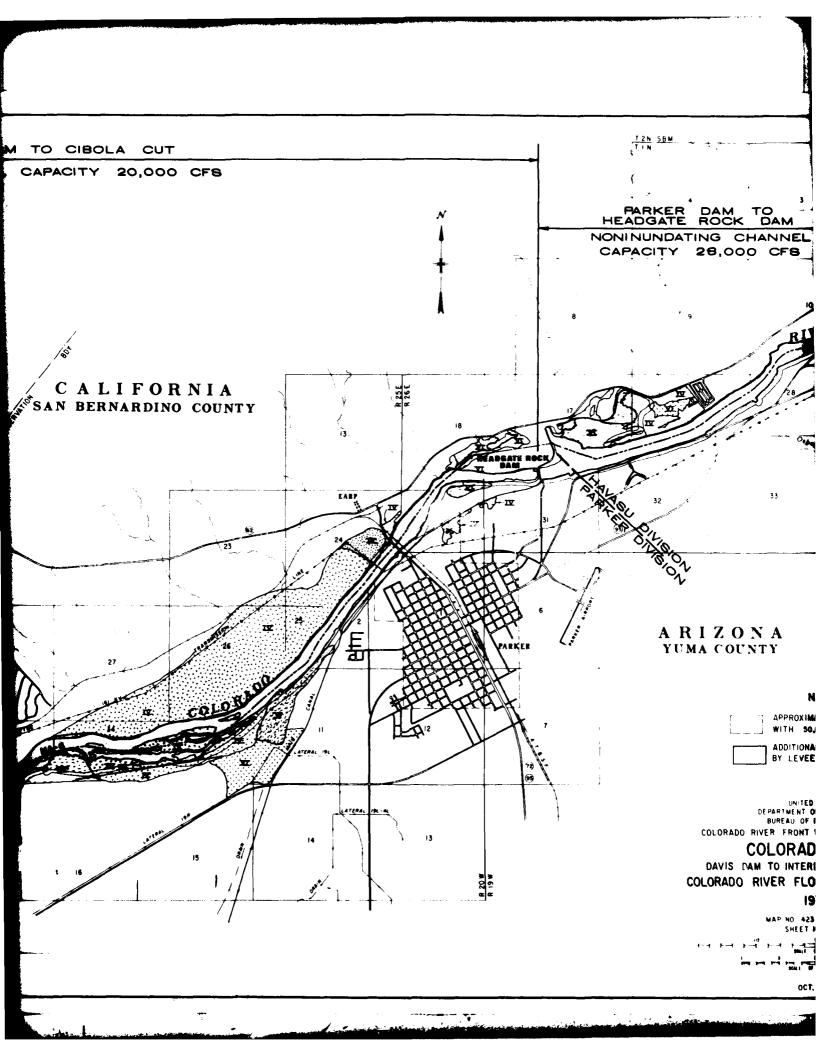

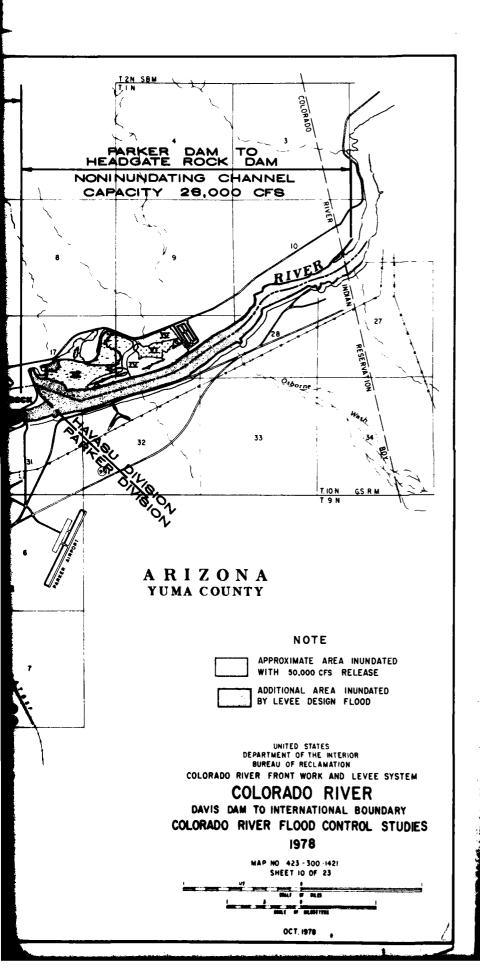

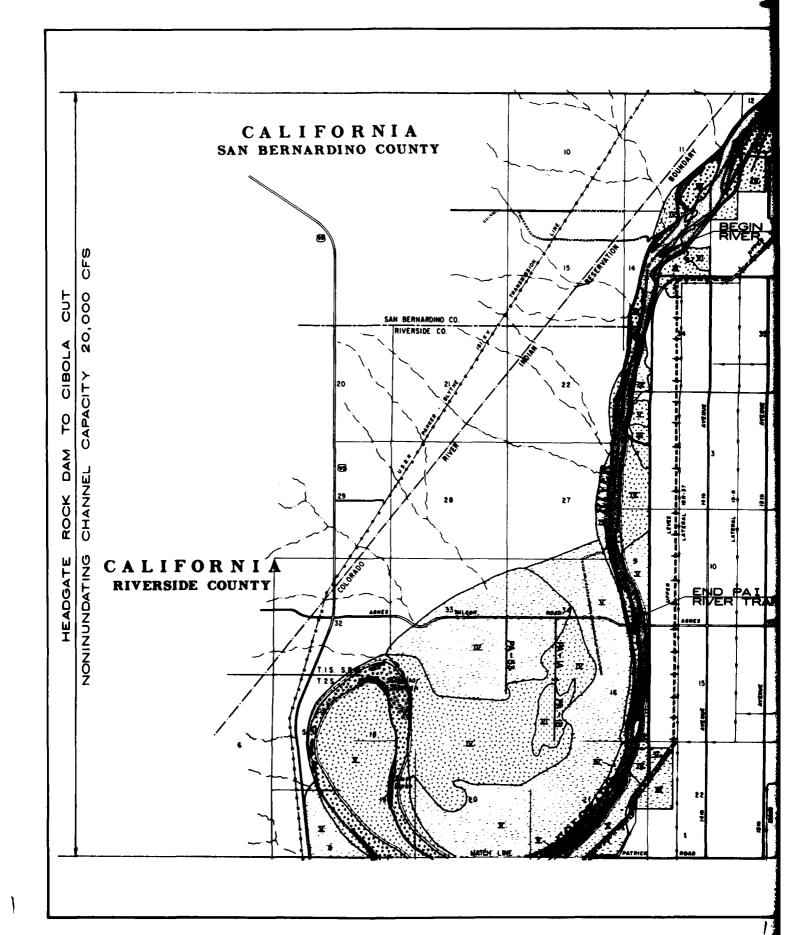

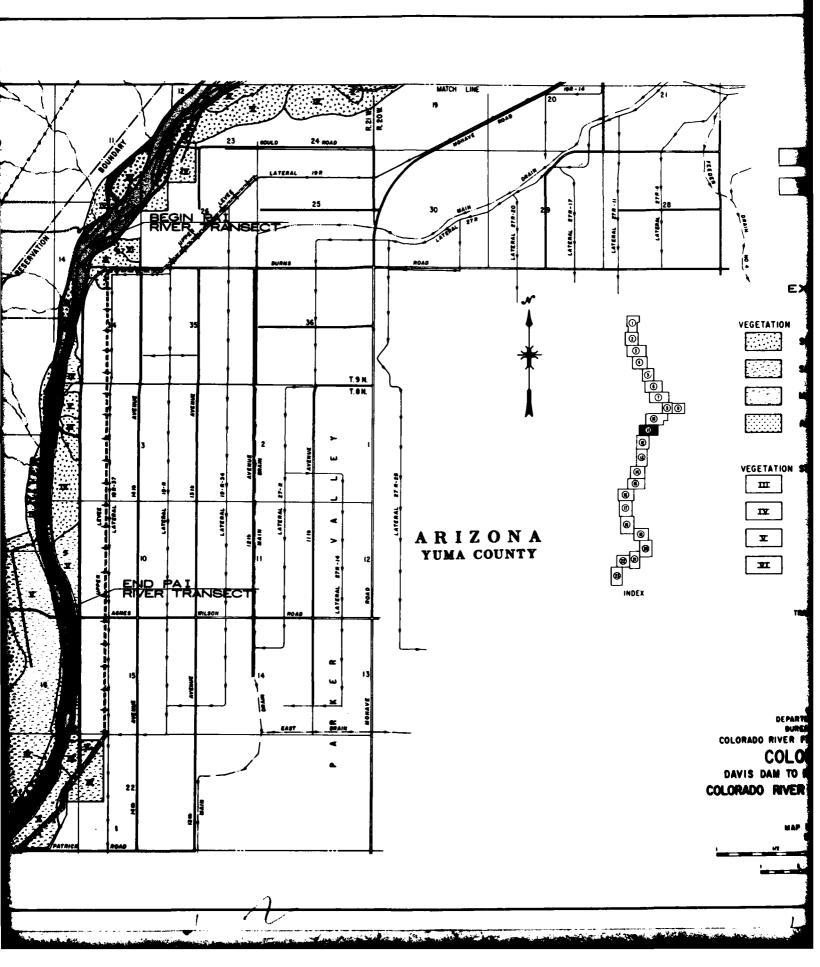

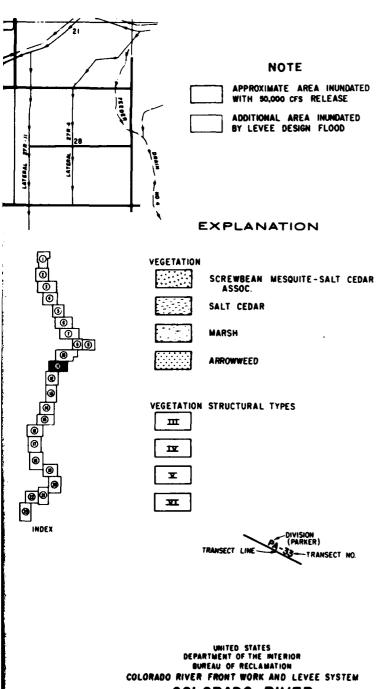



COLORADO RIVER
DAVIS DAM TO INTERNATIONAL BOUNDARY
COLORADO RIVER FLOOD CONTROL STUDIES


1978


MAP NO. 423-300-1422 SMEET II OF 23


OCT. 1978

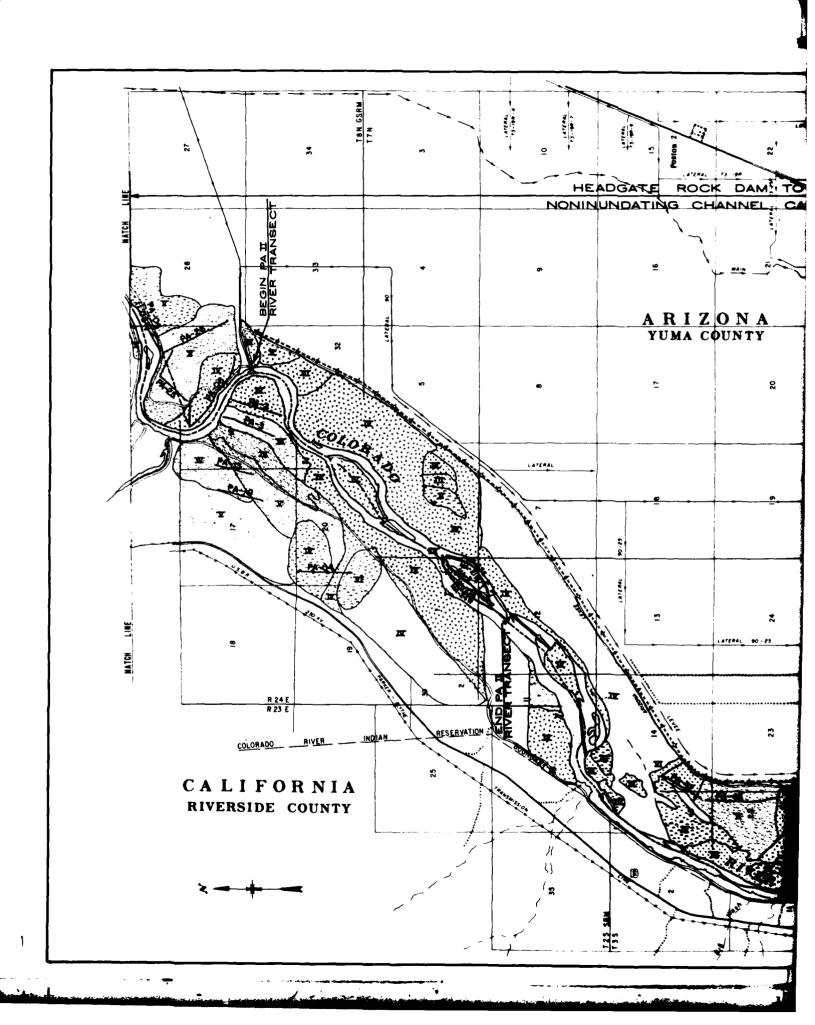


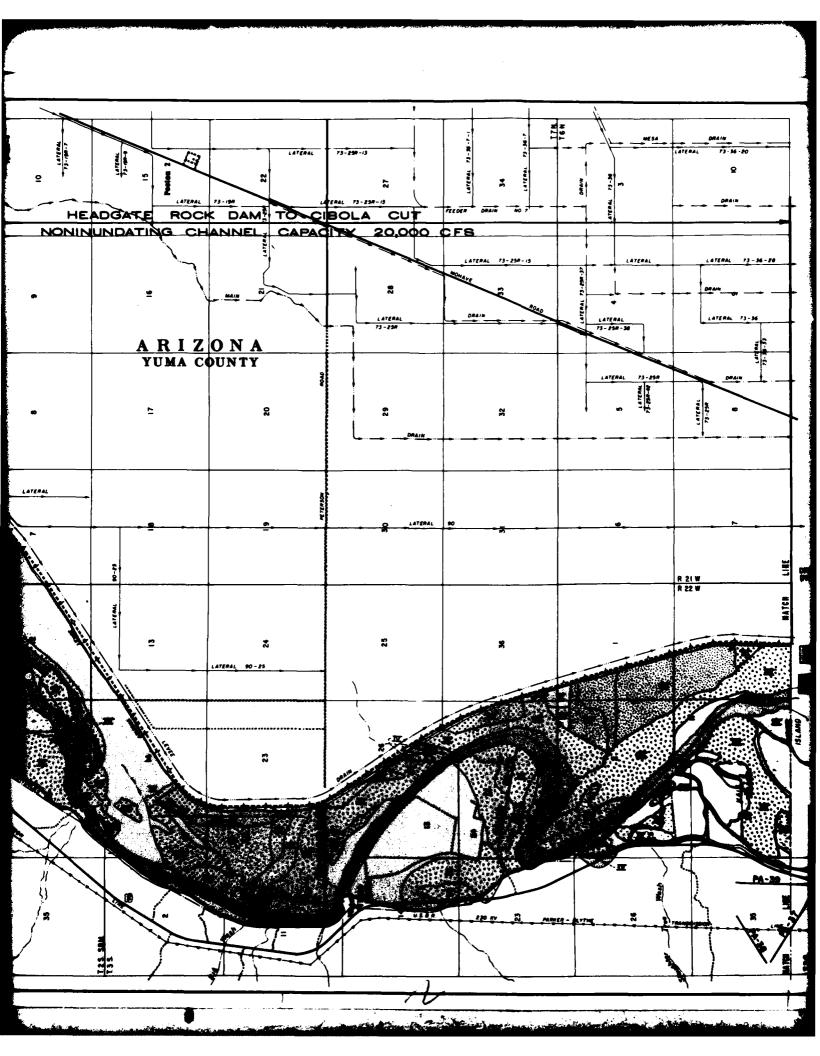

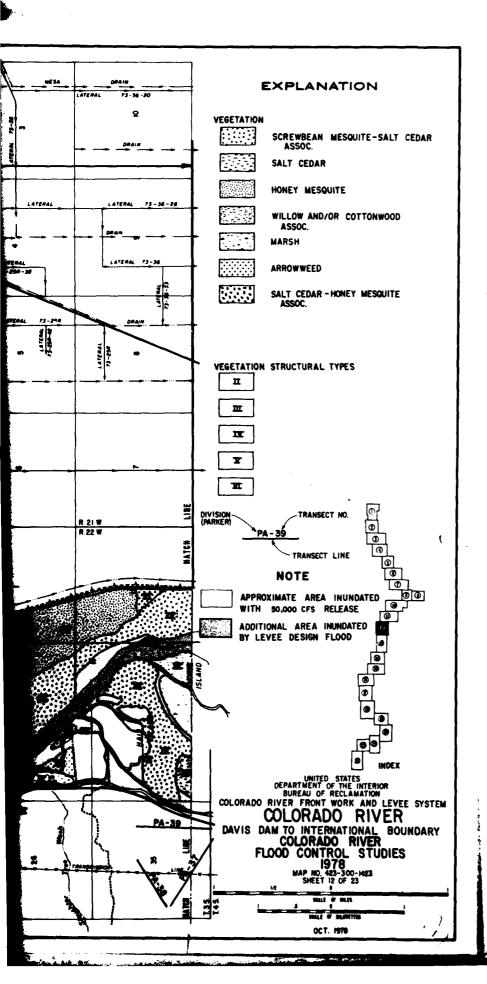

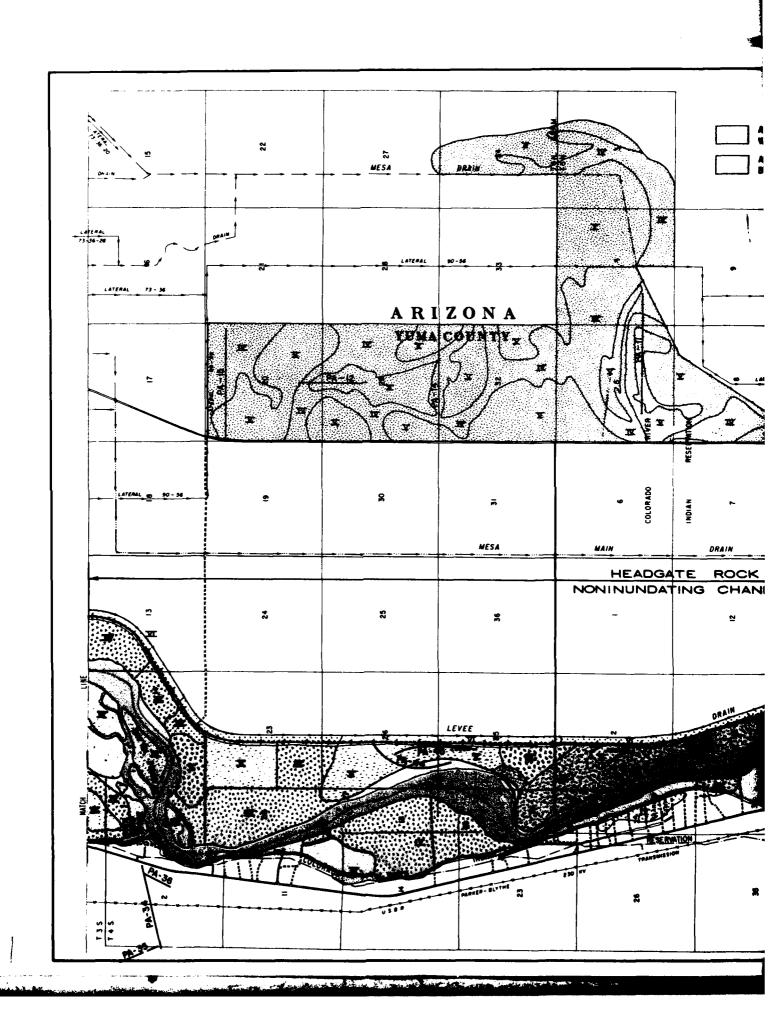

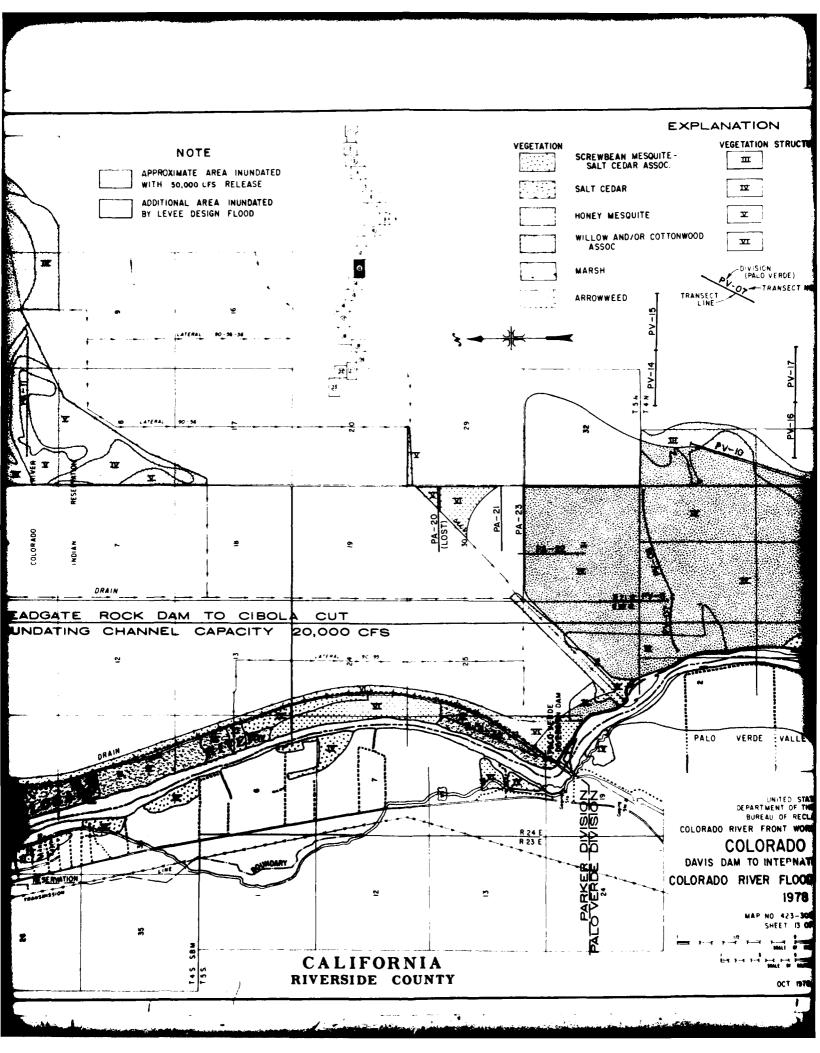

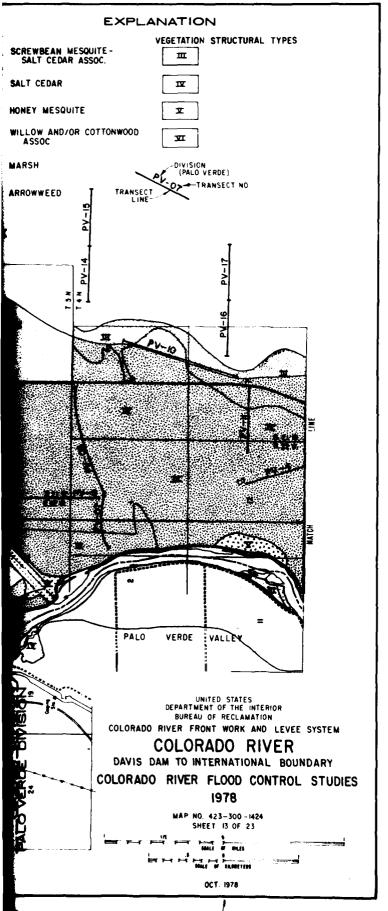



TO THE PARTY OF TH

.

•

See a least to the second

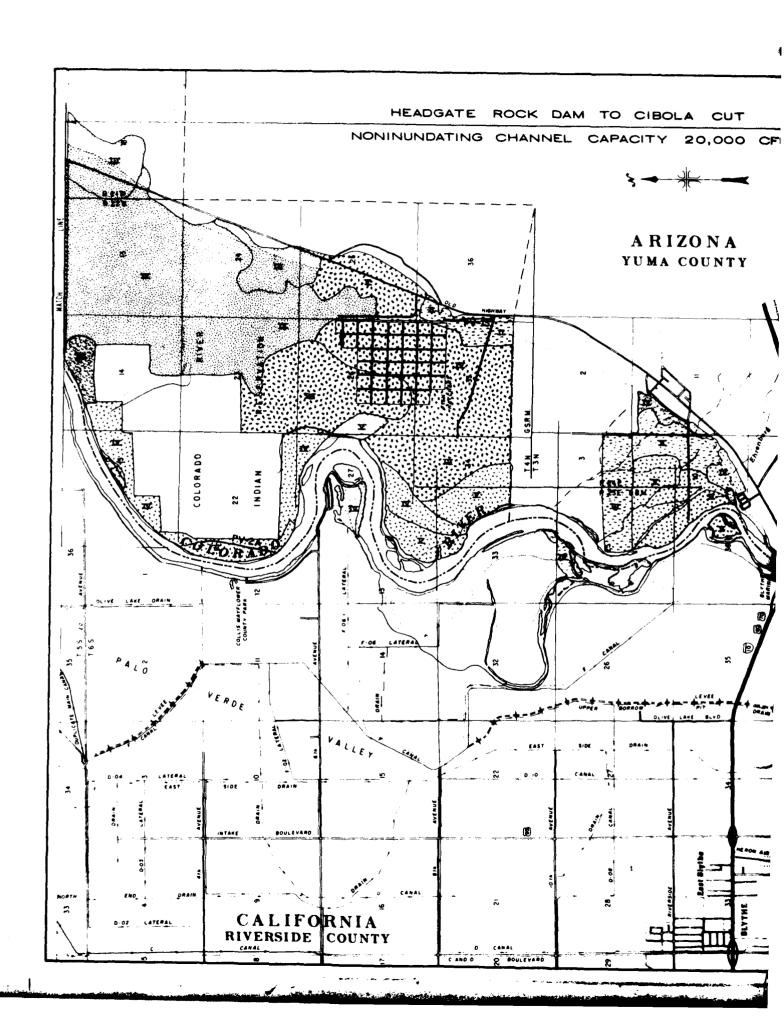

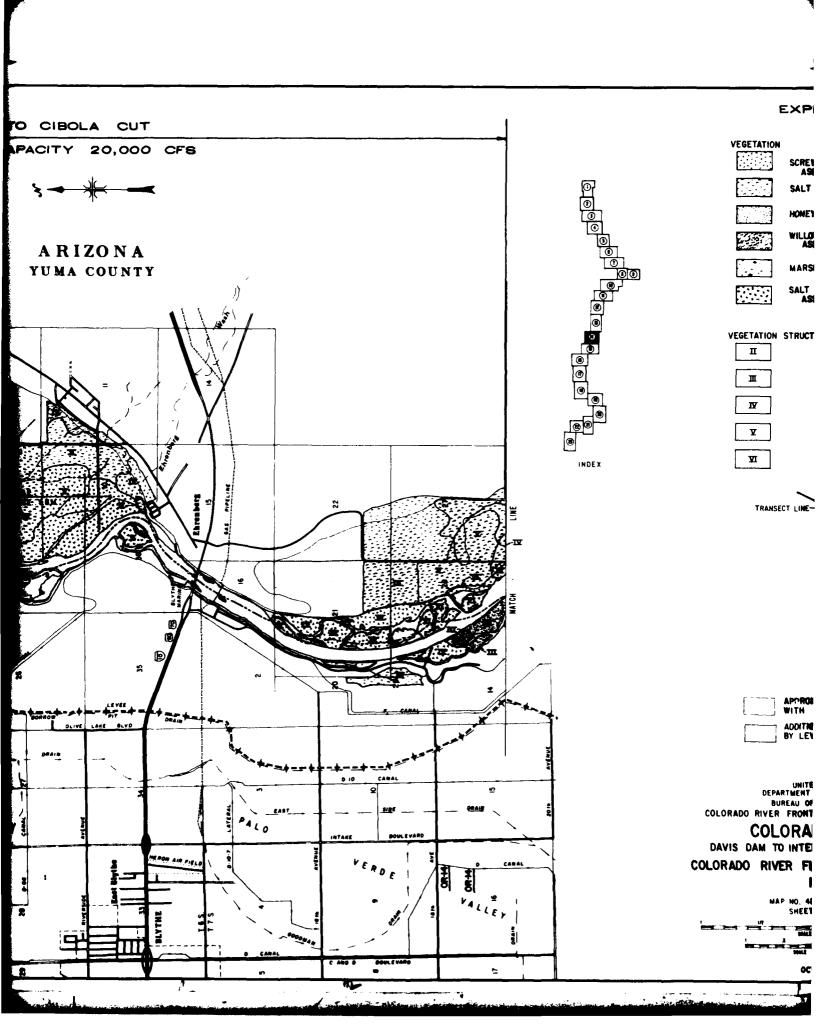

EXPLANATION

VEGETATION SCREWBEAN MESQUITE-SALT CEDAR ASSOC SALT CEDAR HONEY MESQUITE WILLOW AND/OR COTTONWOOD ASSOC. MARSH SALT CEDAR-HONEY MESQUITE ASSOC. VEGETATION STRUCTURAL TYPES п Ш K ¥ v INDEX DIVISION (PALO VERDE) TRANSECT LINE--TRANSECT NO.

NOTE

APPROXIMATE AREA INUNDATED WITH 50,000 CFS RELEASE

ADDITIONAL AREA INUNDATED BY LEVEE DESIGN FLOOD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF RECLAMATION
COLORADO RIVER FRONT WORK AND LEVEE SYSTEM

COLORADO RIVER


DAVIS DAM TO INTERNATIONAL BOUNDARY


COLORADO RIVER FLOOD CONTROL STUDIES 1978

MAP NO. 423-300-1425 SHEET 14 OF 23

OCT. 1979

17

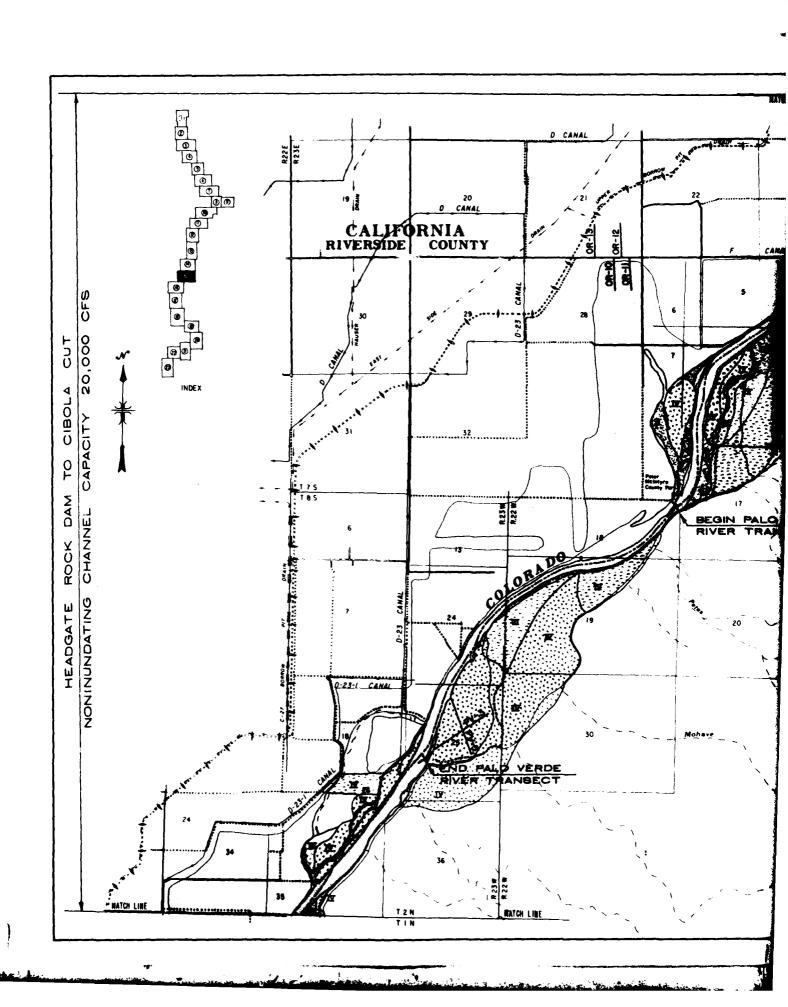


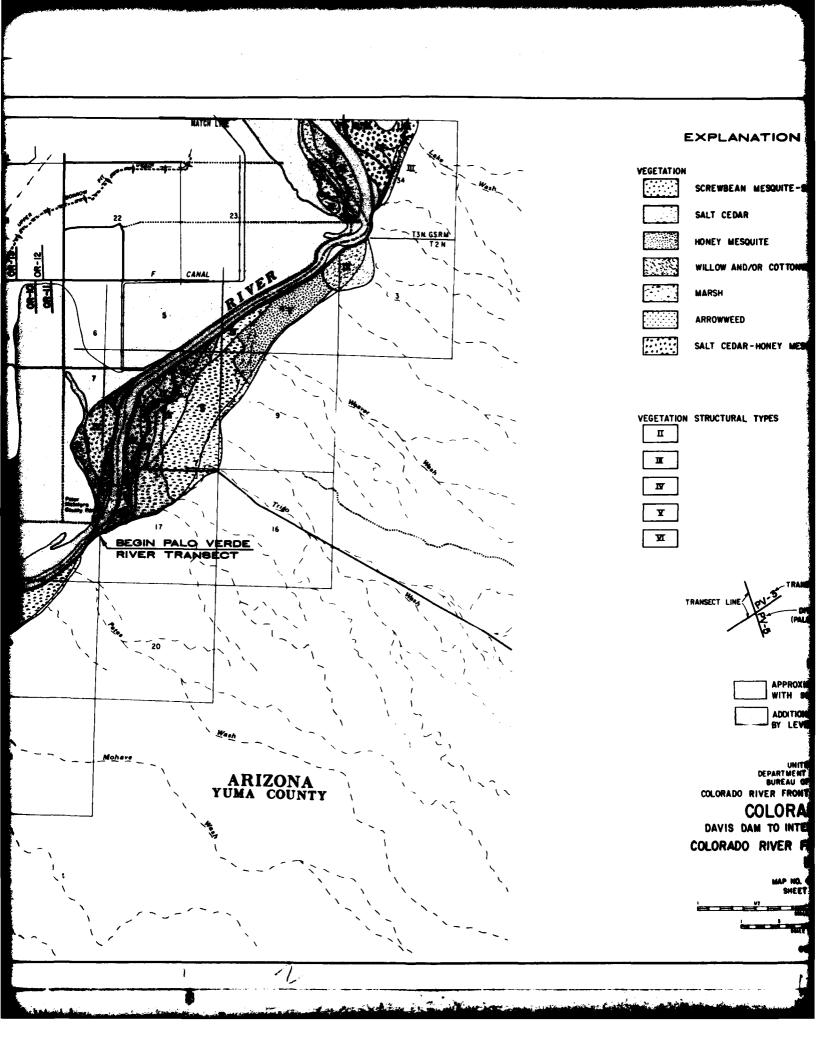



EXPLANATION		
VEGETATION	SCREWBEAN MESQUITE-SALT CEDAR ASSOC.	
	SALT CEDAR	
	HONEY MESQUITE	
33	WILLOW AND/OR COTTONWOOD - SALT ASSOC.	
	MARSH	
	ARROWWEED	
	SALT CEDAR-HONEY MESQUITE	
M M	STRUCTURAL TYPES TRANSECT LINE TRANSECT NO.	
	NOTE APPROXIMATE AREA INUNDATED WITH 50,000 CFS RELEASE	
	ADDITIONAL AREA INUNDATED BY LEVEE DESIGN FLOOD	
	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF RECLAMATION COLORADO RIVER FRONT WORK AND LEVEE SYSTEM COLORADO RIVER DAVIS DAM TO INTERNATIONAL BOUNDARY COLORADO RIVER FLOOD CONTROL STUDIES 1978	
	MAP NO. 423-300-1426 SHEET 15 OF 23	l
	SALE OF SALE	
	SAALT OF BILDSTYCE	
	OCT, 1978	ı

.

ALCOHOLD STATE

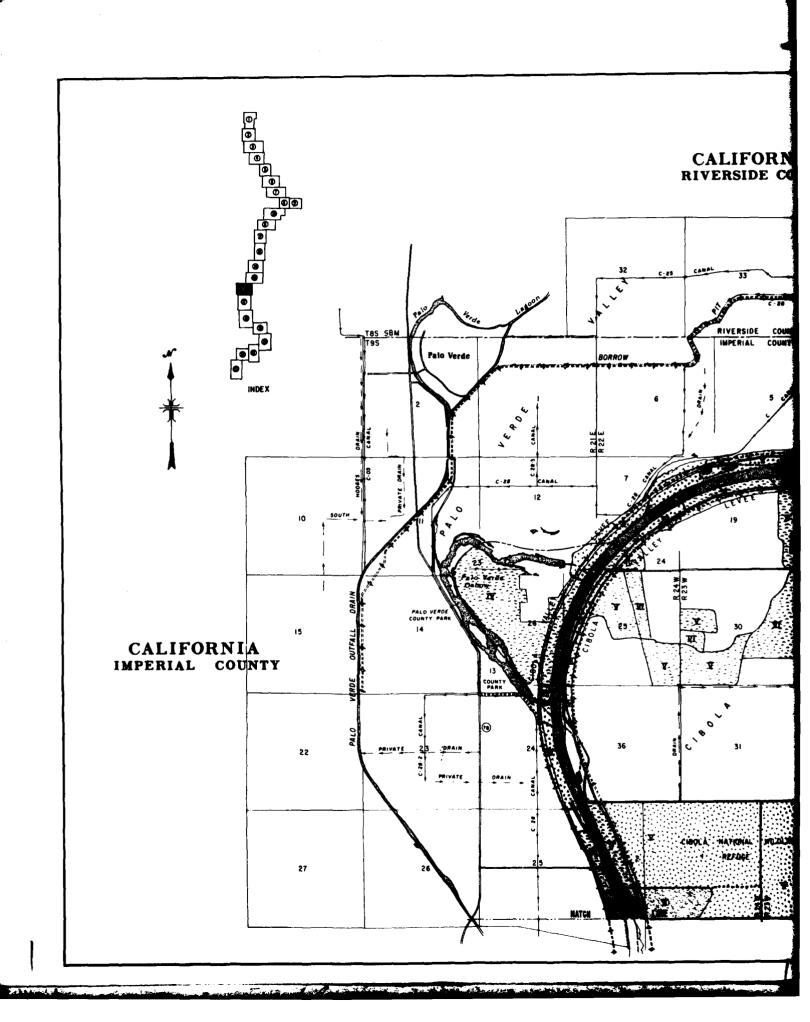

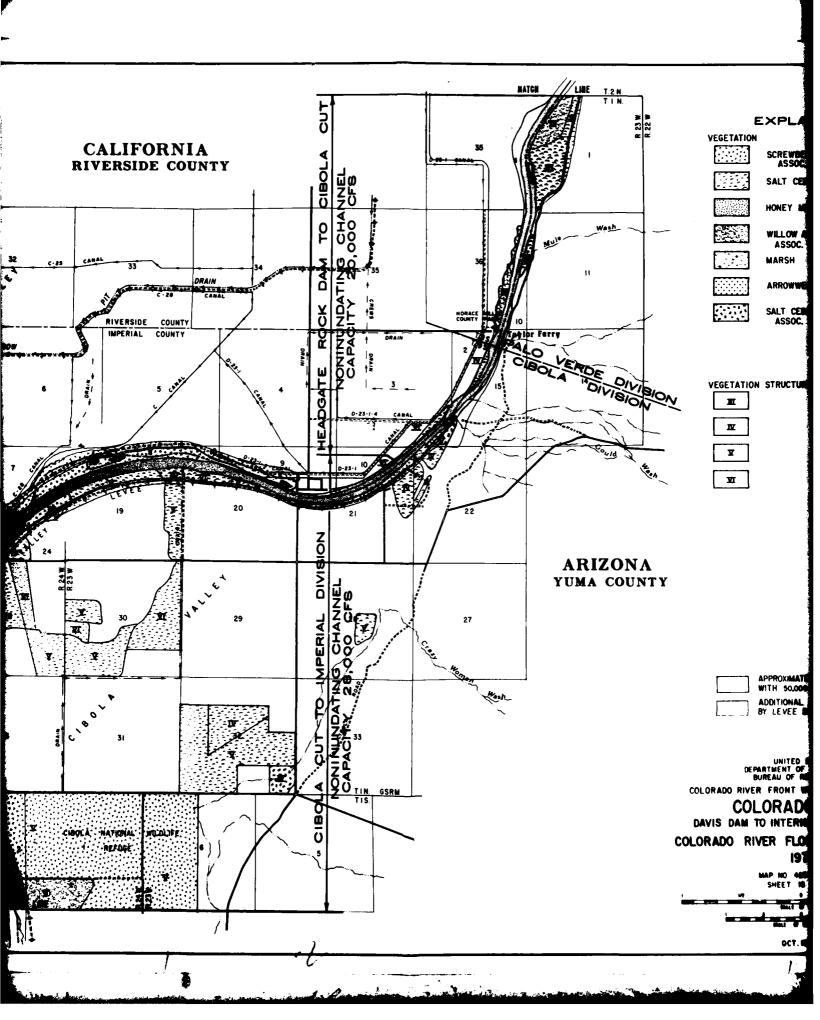

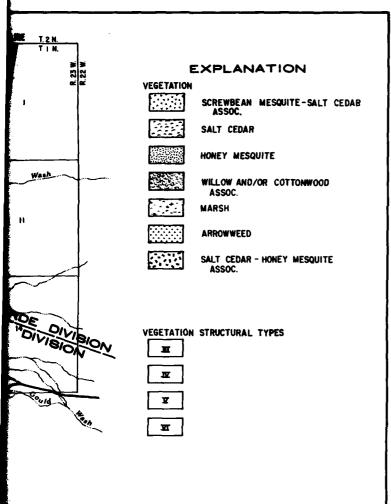

RIZONA MA COUNTY

APPROXIMATE AREA INUNDATED
WITH 50,000 CFS RELEASE
ADDITIONAL AREA INUNDATED
BY LEVEE DESIGN FLOOD

BY LEVEE DESIGN FLOOD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF RECLAMATION

COLORADO RIVER FRONT WORK AND LEVEE SYSTEM

COLORADO RIVER


DAVIS DAM TO INTERNATIONAL BOUNDARY


COLORADO RIVER FLOOD CONTROL STUDIES 1978


MAP NO 423-300-1427 SHEET NO OF 23

SHEET IS OF 23

OCT. 1978

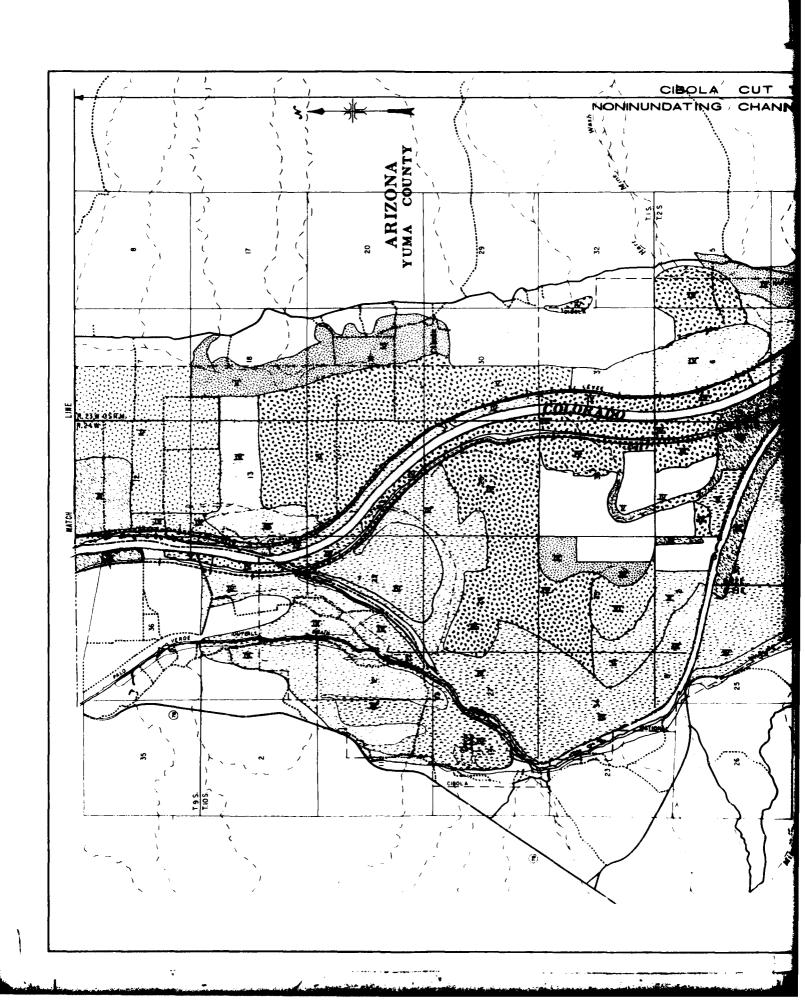

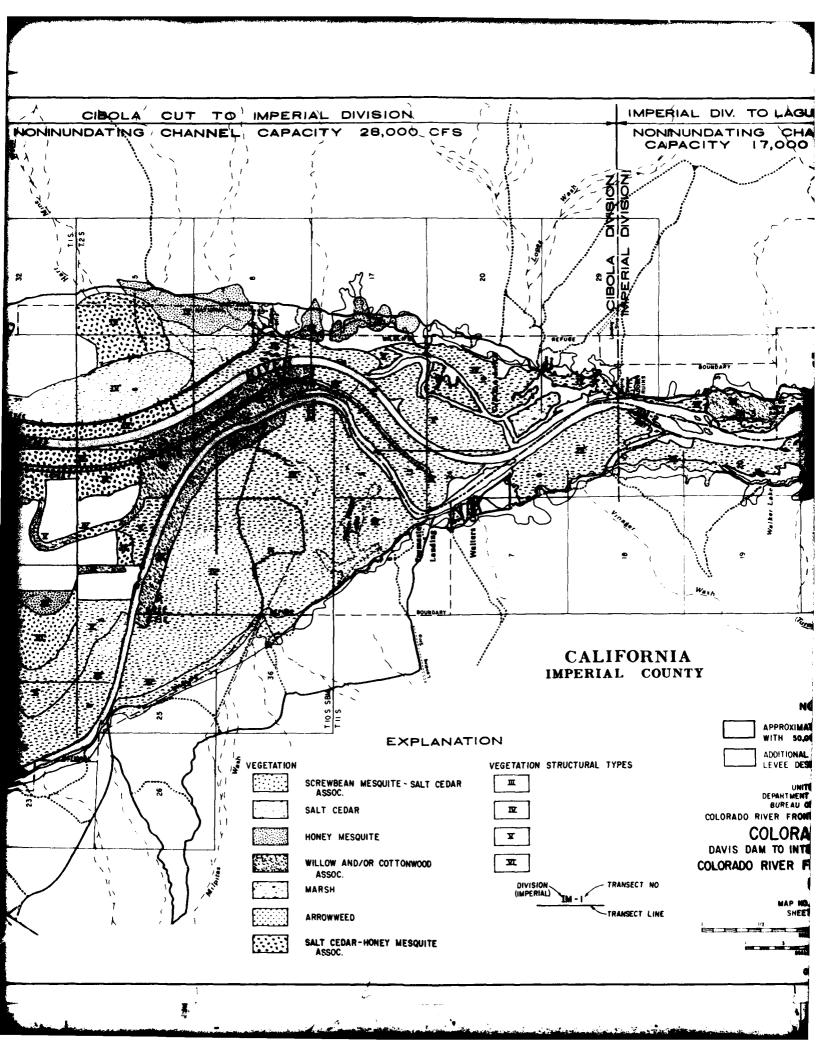

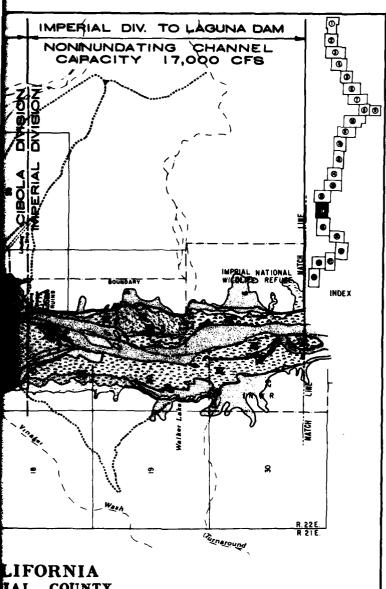



IAL COUNTY


NOTE APPROXIMATE AREA INUNDATED WITH 50,000 CFS RELEASE ADDITIONAL AREA INUNDATED BY LEVEE DESIGN FLOOD TYPES UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF RECLAMATION COLORADO RIVER FRONT WORK AND LEVEE SYSTEM COLORADO RIVER DAVIS DAM TO INTERNATIONAL BOUNDARY COLORADO RIVER FLOOD CONTOL STUDIES 1978 TRANSECT NO. MAP NO. 423-300-1428 SHEET 17 OF 23 TRANSECT LINE SCALE OF ENGINEERING


OCT. 1978


IMPERIAL DIVISION TO LAGUNA DAM NONINUNDATING CHANNEL CAPACITY 17,000 CF EXPLANATION NOTE APPROXIMATE AREA INUNDATED WITH 50,000 CFS RELEASE VEGETATION STRUCTURAL TYPES VEGETATION SCREWBEAN MESQUITE - SALT CEDAR ASSOC. Щ ADDITIONAL AREA INUNDATED BY LEVEE DESIGN FLOOD SALT CEDAR Ŋ HONEY MESQUITE ¥ WILLOW AND/OR COTTONWOOD VI ASSOC. DIVISION~ TRANSECT NO. MARSH ARROWWEED TRANSECT LINE SALT CEDAR-HONEY MESQUITE ASSOC.

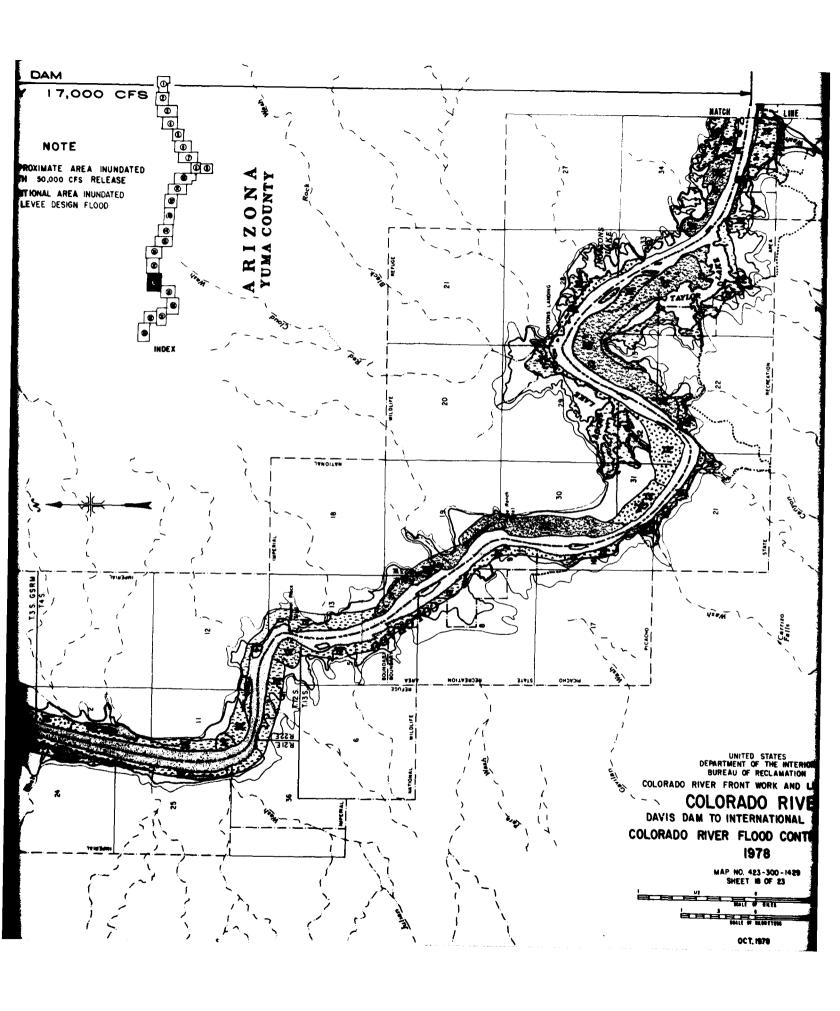


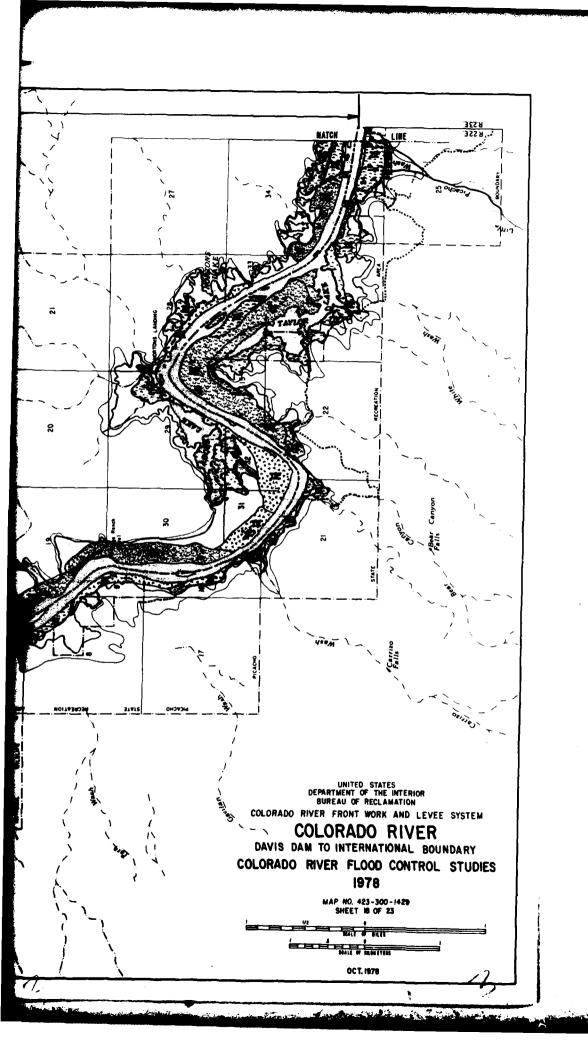

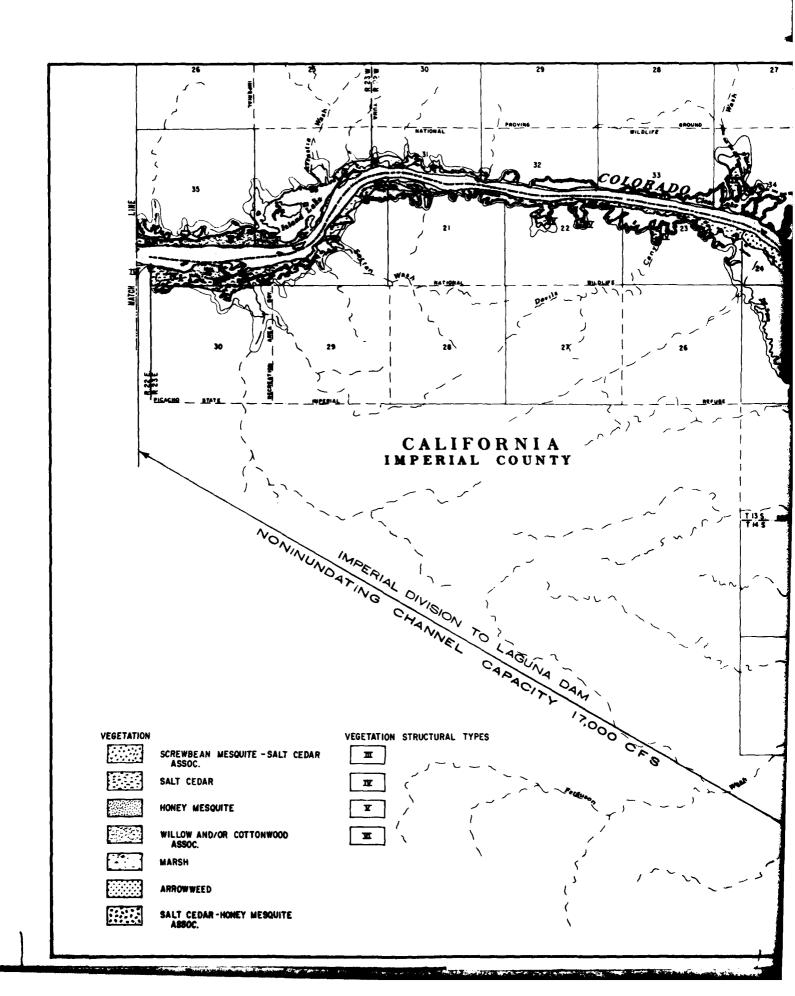

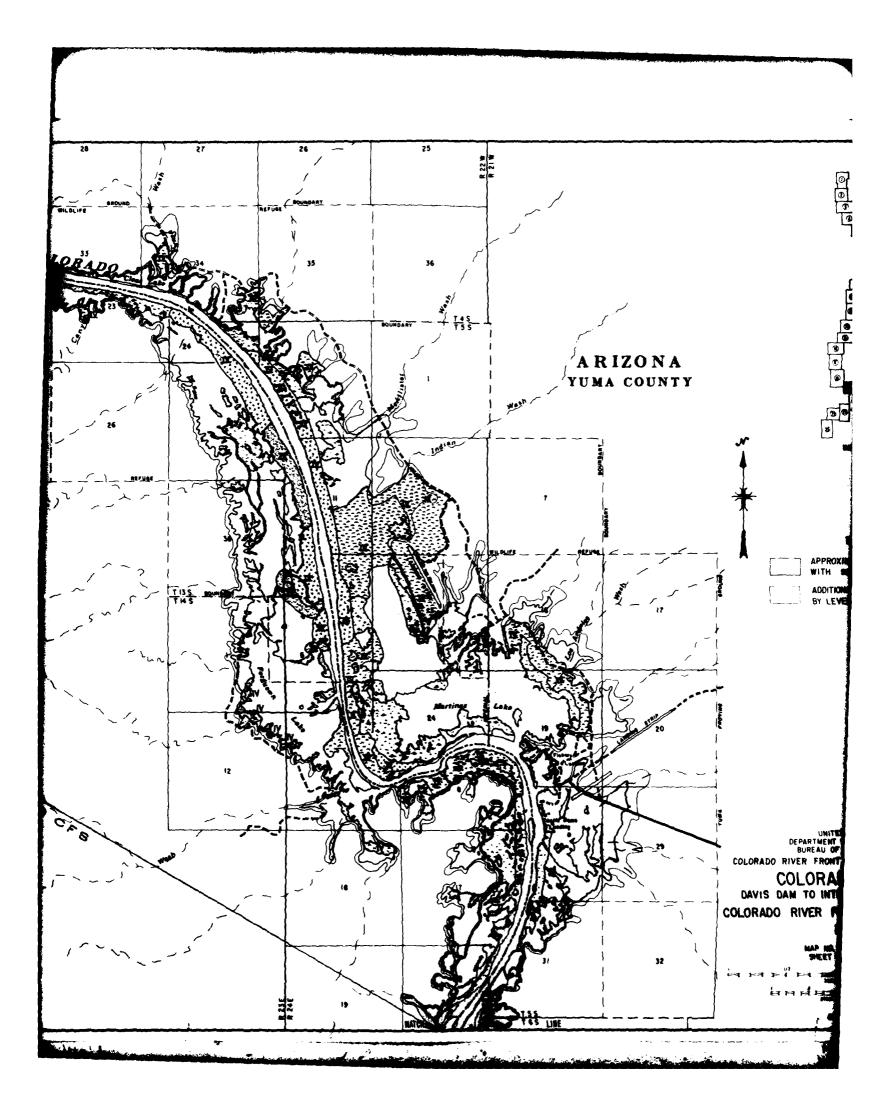

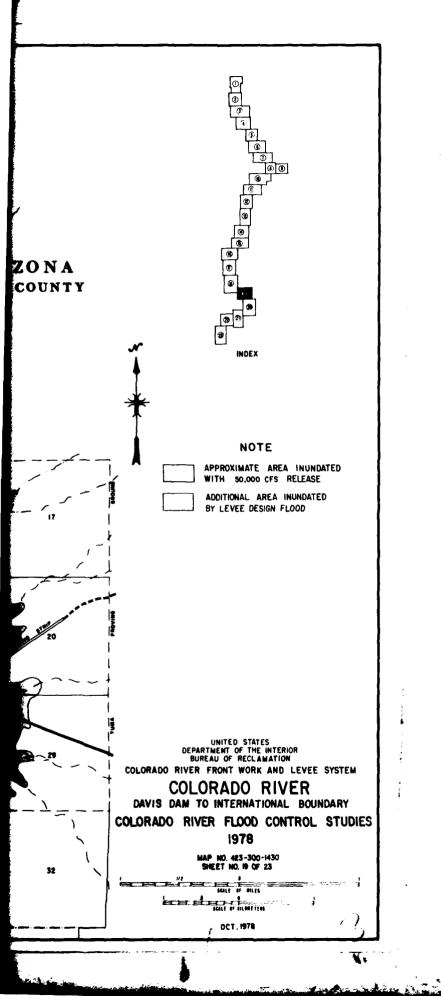

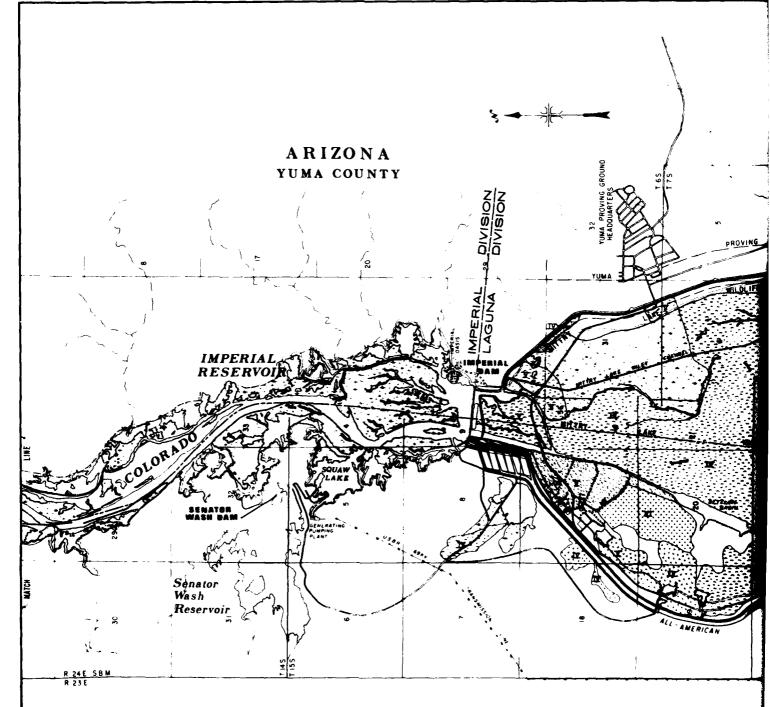


NOTE


APPROXIMATE AREA INUNDATED
WITH 50,000 CFS RELEASE


ADDITIONAL AREA INUNDATED BY LEVEE DESIGN FLOOD CALIFORNIA IMPERIAL COUNTY


IMPERIAL DIVISION TO LAGUNA DAM


NONINUNDATING CHANNEL CAPACITY 17,000 CFS

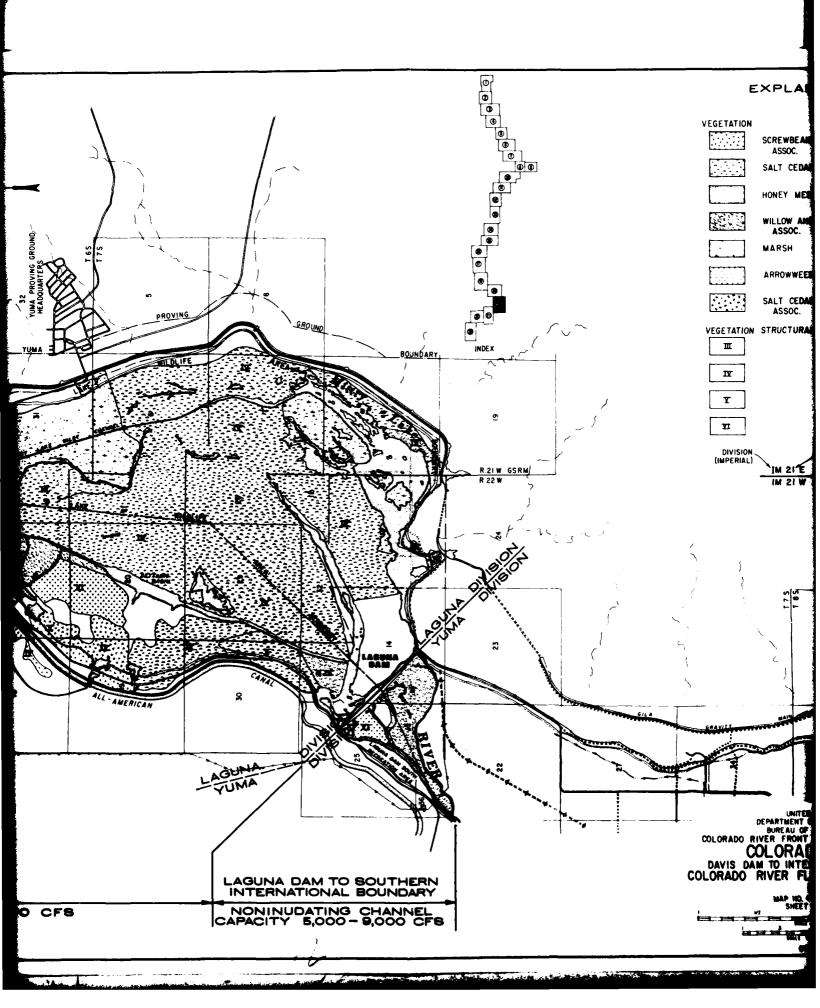


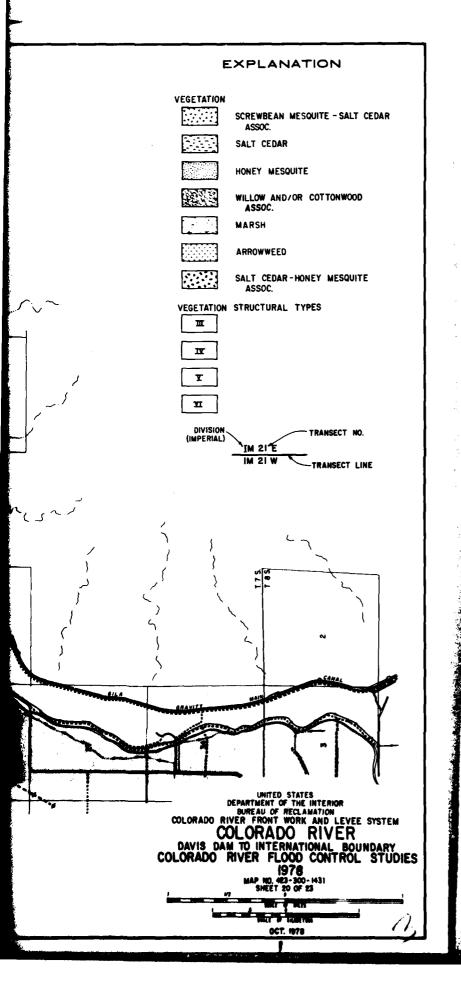


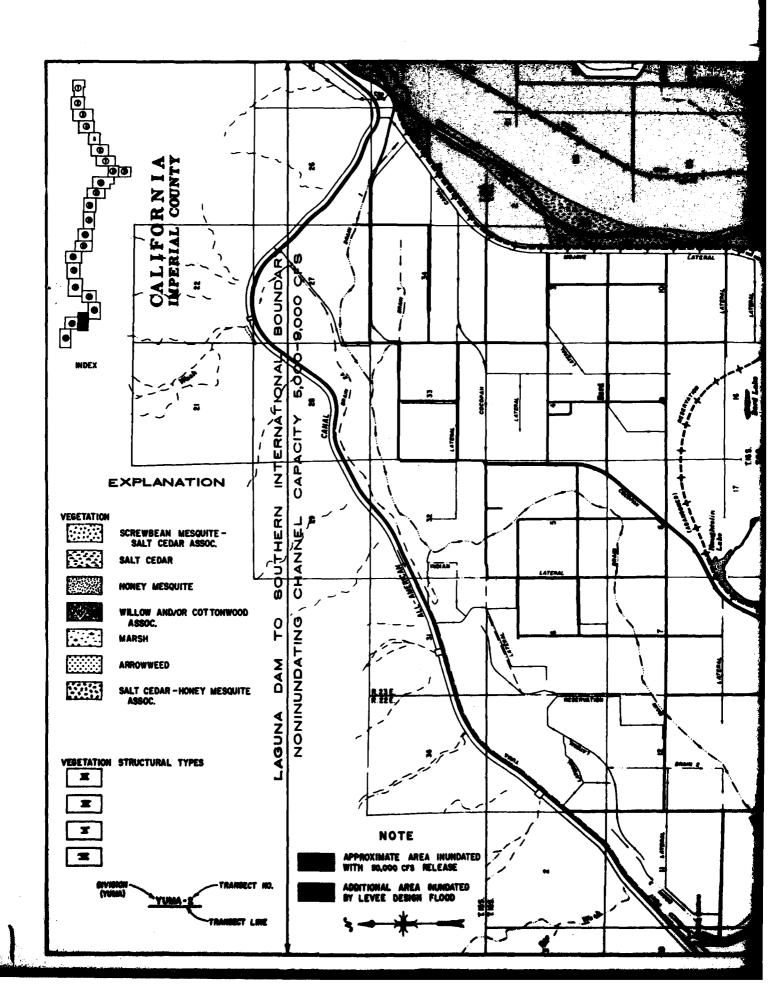

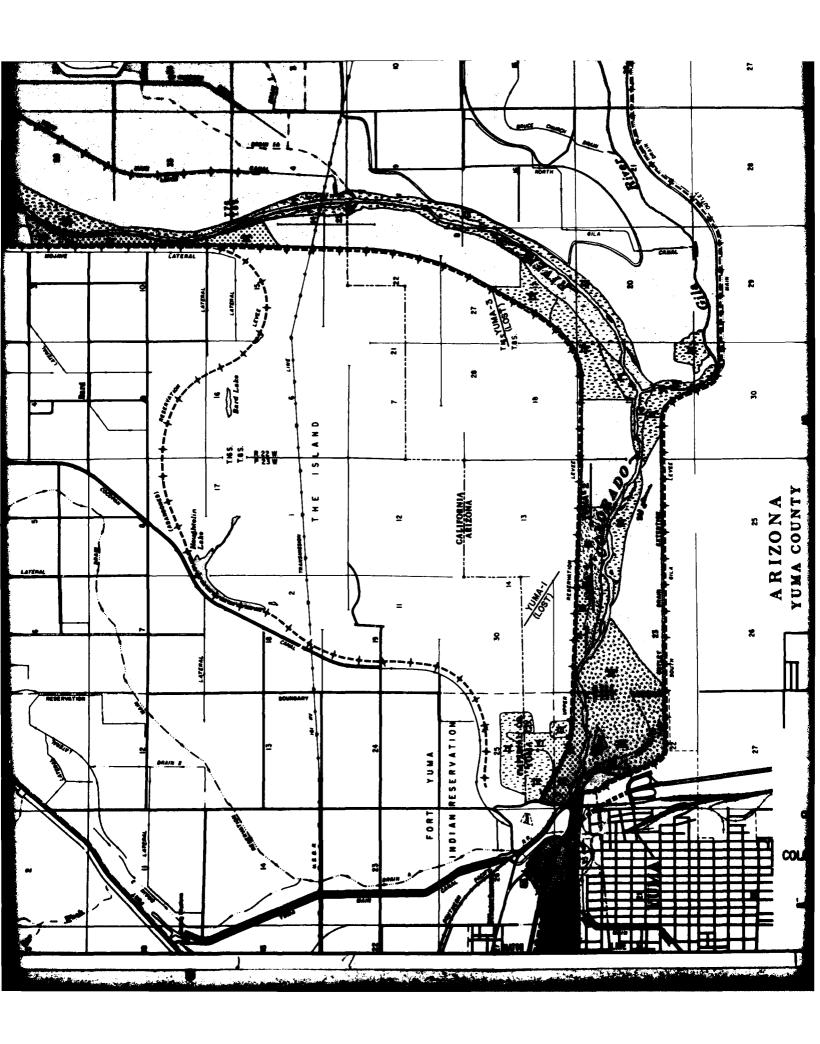

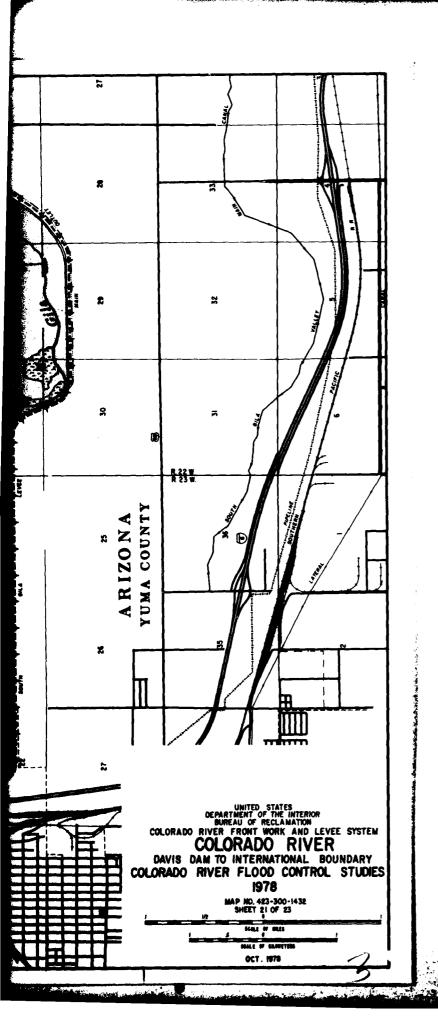

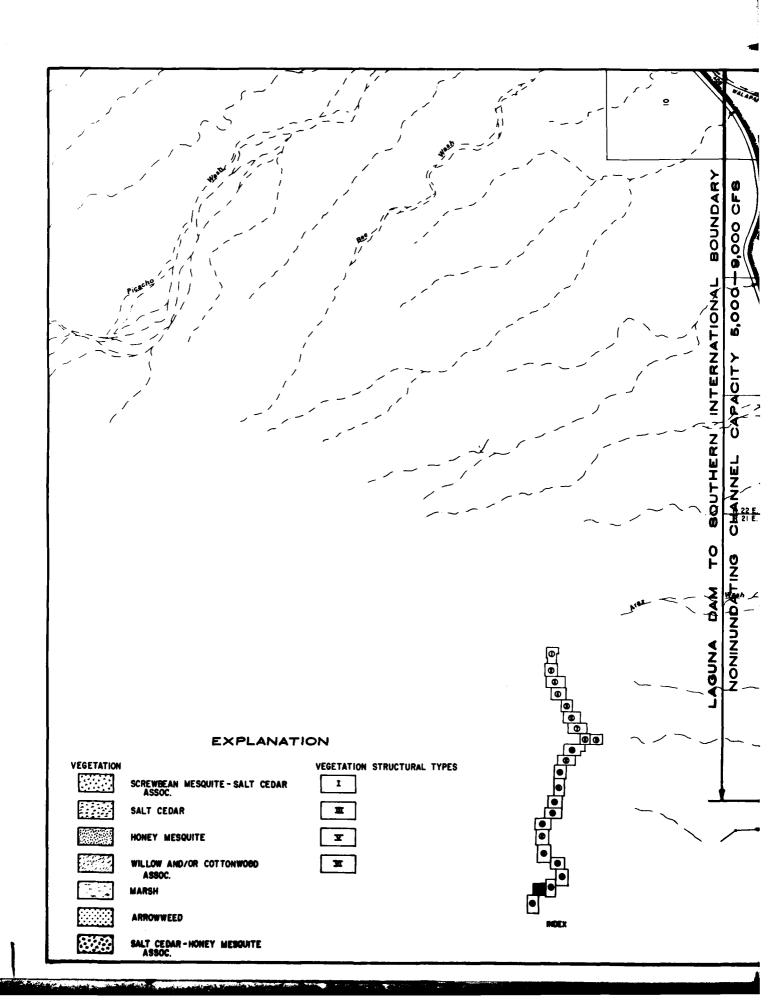

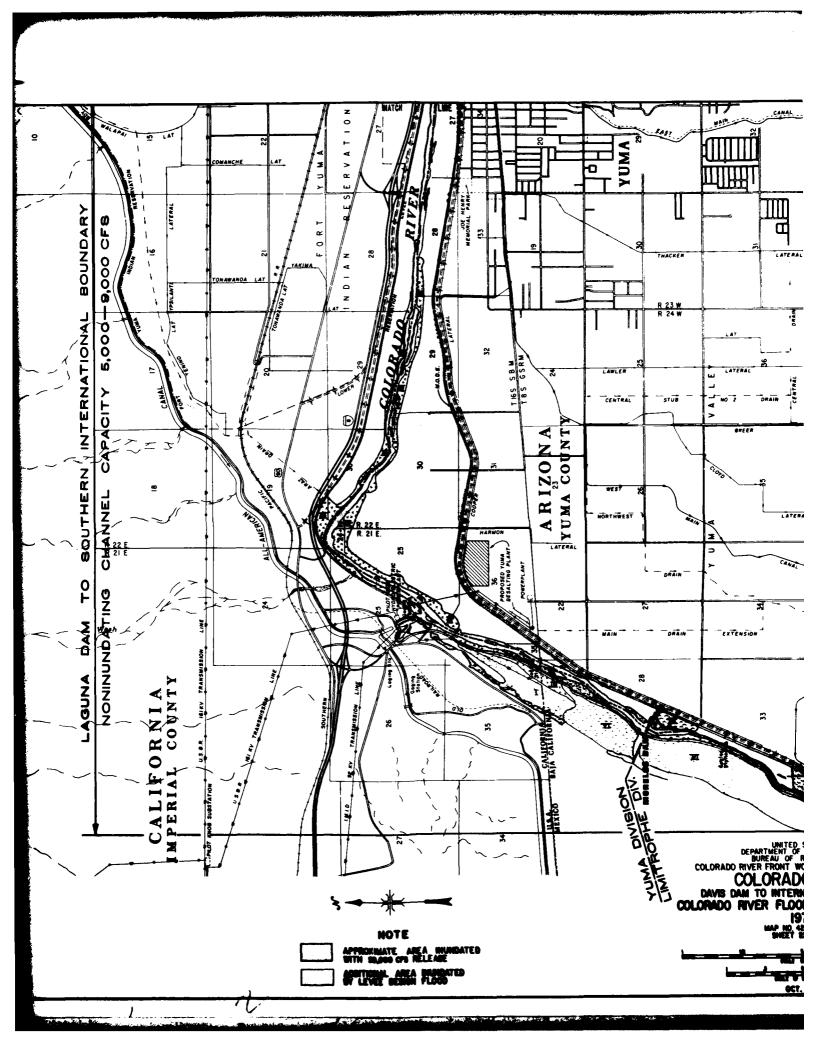

AD-A132 464

COLORADO RIVER BASIN HOVER DAM - REVIEW OF FLOUD CONTROL REGULATION(U) ARMY ENGINEER DISTRICT LOS ANGELES CALIF JUL 82

F/G 13/2 NL


END
ONE
OFFICIAL PROPERTY OF FLOUD SAME OF FLOUD CONTROL REGULATION(U) ARMY ENGINEER DISTRICT LOS
ANGELES CALIF JUL 82


F/G 13/2

NL



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963 A

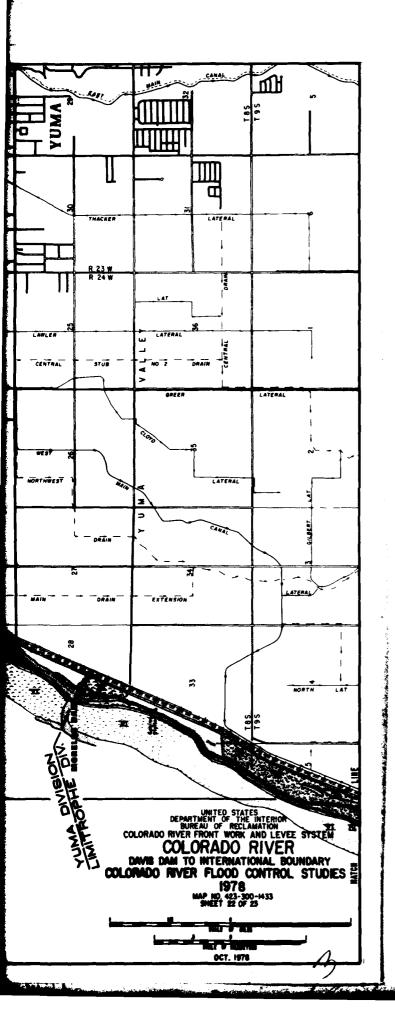

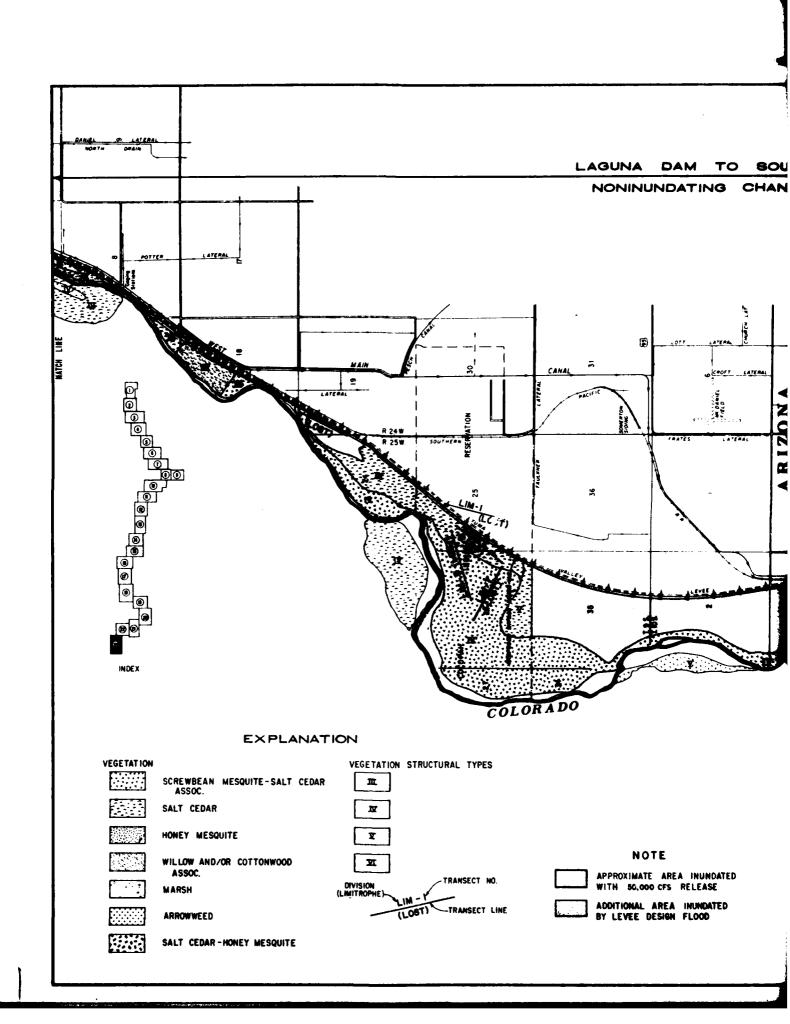

SOUTHERN INTERNATIONAL BOUNDARY NINUNDATING CHANNEL CAPACITY 5,000-9,000 CFS LATERAL YUMA COUNTY ARIZONA DEPARTMENT OF A BUREAU OF A COLORADO RIVER FRONT COLORAD DAVIS DAM TO INTER NOTE COLORADO RIVER FL RIMATE AREA INUNDATED 80,000 CFS RELEASE

OMAL AREA INUNDATED

